


911 address shall be a minimum 3" lettering marked on meter enclosure, pole, or durable material attached to pole and should be visible from street. (See sections 3.4)

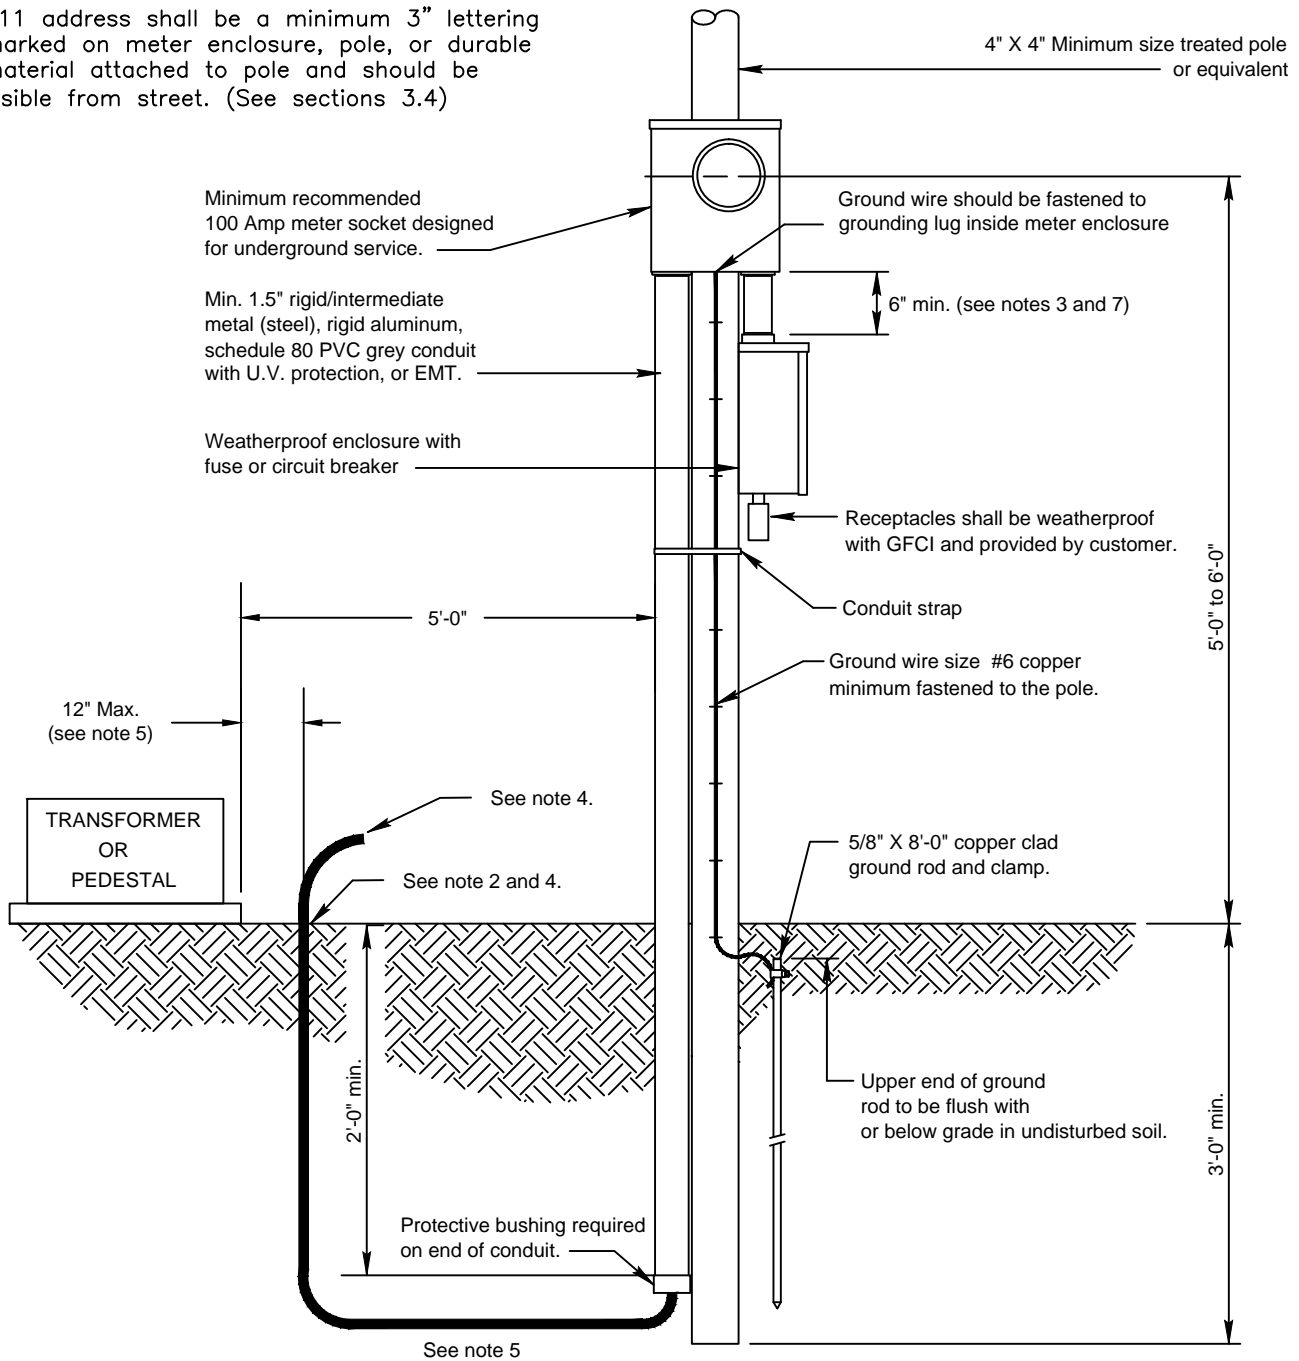

**NOTES:**

1. Customer facilities shall comply with Company Standards, the National Electrical Code (NEC), and authorities having jurisdiction.
2. Customer provides minimum wire size of #6 copper or #4 aluminum. All conduit connections to be weatherproof.
3. Service wire suitable for direct burial to be furnished, installed and maintained by customer. Customer to tail out enough service wire to reach inside of pedestal or transformer lugs.
4. Customer to trench to within 12" of pedestal or transformer. Minimum depth of trench 24".
5. Location of Customer's underground cables shall be visibly marked by customer prior to Company energizing service.
6. If the conduit between the meter socket and the main disconnect is not metal, a bonding ground is required.
7. When air conditioned or electrically heated construction trailers are to be served, please see drawing D4-5 or consult the Company.

**CALL 811 TWO BUSINESS DAYS BEFORE YOU DIG**

In locations with underground facilities, the Customer shall notify One Call and shall have One Call locate all underground facilities before digging. It shall be the responsibility of the Customer to stay clear of all underground facilities.

<b>ENTERGY SERVICES, INC.</b>			
<b>TEMPORARY POLE SERVICE FROM AN UNDERGROUND SOURCE</b>			
APPROVED BY: <b>JRH</b>	DATE: <b>03/11/2013</b>		
CHECKED BY: <b>JED</b>	SCALE: <b>None</b>		
DRAWN BY: <b>krich95</b>			
<b>Entergy</b>		No. <b>D4-2</b>	
		PLOT <b>1=1</b>	SH. <b>1 OF 1</b>

2	06/15/17	ADDED SOURCE TO POLE DIMENSION, RENUMBERED NOTES.	ERG	
1	02/13	REVISION OF DRAWING SS4.5-2	JED	
NO.	DATE:	REVISION	BY:	APPR: