

C. COORDINATE DEVICE LOCATIONS, INCLUDING ELEVATIONS, WITH SHULER SHOOK DRAWINGS.


- 1 CONNECT TO EXISTING CIRCUIT OF RECEPTACLE REMOVED FROM THIS LOCATION.
- 2 FOR EXISTING RECEPTACLE SHOWN TO REMAIN, REPLACE RECEPTACLE WITH NEW RECEPTACLE AND COVER PLATE.
- 3 FOR EXISTING RECEPTACLE SHOWN TO REMAIN, REPLACE RECEPTACLE WITH NEW GFI, WR RECEPTACLE AND PROVIDE WEATHERPROOF WHILE-IN-USE COVER.
- 4 ROUTE CONDUIT UNDERGROUND (MINIMUM 18" BELOW GRADE) AND STUB-UP IN JANITORS CLOSET. SEE DETAIL 2E-601.
- 5 PROVIDE J-BOXES FOR FLUSH VALVE AND LAVATORY SENSORS, COORDINATE EXACT QUANTITIES AND LOCATIONS OF POWER SUPPLIES AND J-BOXES WITH DIVISION 22. PROVIDE CONDUIT STUBBED ABOVE ACCESSIBLE CEILING FROM BOXES FOR LOW VOLTAGE WIRING. INSTALL TRANSFORMER ABOVE ACCESSIBLE CEILING.
- 6 AT ORIGINAL PANEL LOCATION, ABOVE CEILING, EXTEND AND RECONNECT EXISTING BRANCH CIRCUIT CONDUITS WHICH ARE TO REMAIN. CIRCUITS MAY BE INTERCEPTED ELSEWHERE IF CONDUIT CAN BE CONCEALED. FOR CIRCUITS BELOW GRADE WHICH HAVE LOADS TO REMAIN, REROUTE CONCEALED, TO ABOVE CEILING, COORDINATE WITH CEILING ACCESS PANEL LOCATION TO MAINTAIN ACCESSIBILITY TO J-BOXES.

- 7 PROVIDE LABEL IDENTIFYING LOCATION OF THE BRANCH CIRCUIT BREAKER SUPPLYING THE FIRE ALARM CONTROL PANEL.
- 8 STUB-OUT FOUR, SPARE, 1" CONDUITS WITH PULL CORDS FROM PANELBOARD TO ABOVE ACCESSIBLE CEILING .
- 9 DISCONNECT EXHAUST FAN ON ROOF. EXTEND CIRCUIT AS REQUIRED AND CONNECT TO UNIT-MOUNTED DISCONNECT SWITCH OF NEW FAN. VERIFY EXISTING CIRCUIT IS 120V/20A.
- 10 (NOT USED)
- 11 FLOORBOX FURNISHED BY AV INTEGRATOR.
- 12 SURFACE-MOUNT OUTLET BOX.
- 13 COMPANY SWITCH FURNISHED BY DIVISION 11.
- 14 CIRCUIT PER SINGLE-LINE DIAGRAM. SEE E-603.
- 15 ADD ALTERNATIVE #2A - PROVIDE RECEPTACLE AND DATA FOR TELEVISION (NORTH WALL) AND OMIT RECEPTACLES AND DATA FOR DIGITAL DISPLAY (SOUTH WALL)

- 16** EXISTING POWER POLE. COORDINATE WITH ENTERGY FOR DIP POLE FOR NEW SERVICE.
- 17** REPLACE EXISTING RECEPTACLE AND WALL PLATE. CONNECT TO EXISTING CIRCUIT.
- 18** SEE ED101. EXTEND CIRCUIT OF DEMOLISHED RECEPTACLE TO NEW RECEPTACLE. INSTALL NEW RECEPTACLE AT 18" AFF OF RAMP.
- 19** CONDUIT STUB-UP FOR AISLE LIGHTING INTEGRAL WITH SEATING. COORDINATE EXACT LOCATION WITH SEATING MANUFACTURER. LIGHT FIXTURE BY SEATING. MANUFACTURER. TREMUR SLAB AS NECESSARY. COORDINATE LED DRIVER LOCATION(S) WITH SEATING MANUFACTURER. CONNECT TO CIRCUIT H-18 VIA RELAY IN MZC-1. SEE SHULER SHOOK DRAWING SK 011 AND TL 011.
- 20** EACH DUPLEX RECEPTACLE SHALL BE FED FROM A DEDICATED CIRCUIT.
- 21** ADD ALTERNATIVE #2B - PROVIDE RECEPTACLES AND DATA FOR DIGITAL DISPLAY (SOUTH WALL) AND OMIT NEW RECEPTACLE AND DATA FOR TV (NORTH WALL). EXISTING RECEPTACLES TO REMAIN ON NORTH WALL.
- 22** ADD ALTERNATIVE #3 - DISCONNECT AND RECONNECT EXISTING PACKAGED AHU. COORDINATE CIRCUIT REQUIREMENTS, MODIFY AS REQUIRED FOR NEW AHU.
- 23** INSTALL NO ELECTRICAL INFRASTRUCTURE WHICH MAY CONFLICT WITH THE RIGGING WALL. SEE SHULER SHOOK DRAWINGS.



M.L. HARRIS  
AUDITORIUM  
RENOVATION

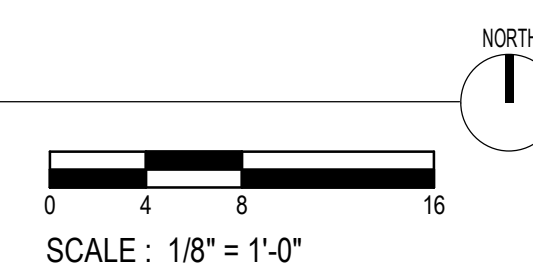

Volume \_\_\_\_\_



**VOLUME 1**

Design Phase \_\_\_\_\_

**CONSTRUCTION  
DOCUMENTS**

[illegible]

Stamp \_\_\_\_\_



Notes 07-10-2026

1. CROMWELL ARCHITECTS ENGINEERS, INC.  
ALL RIGHTS RESERVED
2. THIS SHEET DESIGNED FOR COLOR PRINTING.  
CRITICAL INFORMATION MAY BE LOST WITH  
BLACK AND WHITE PRINTING.

Project Number \_\_\_\_\_

Issue Date 2024-060

09-10-2026

Sheet Title \_\_\_\_\_

### FIRST FLOOR POWER PLAN

Sheet Number \_\_\_\_\_

# EP101