




Z:\25-0025-48- Massard Road- For Smith\Design Drawings\25-48 DESIGN.dwg 6/17/26 at 10:31am

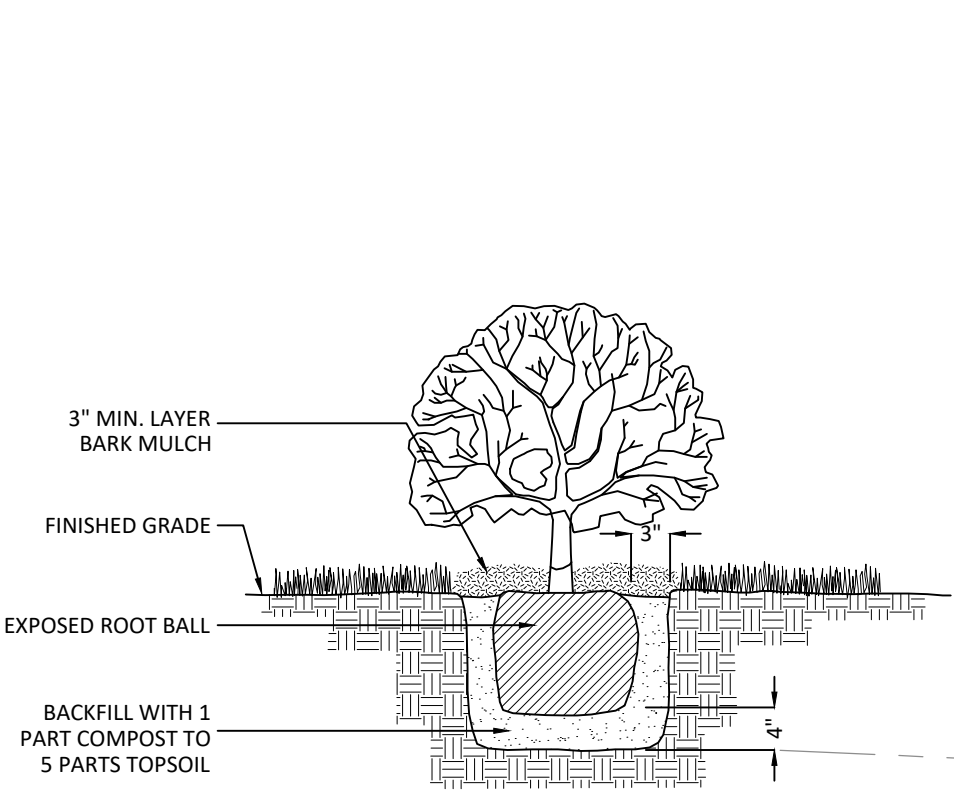

DETAIL - SHRUB PLANTING
SCALE - NTS

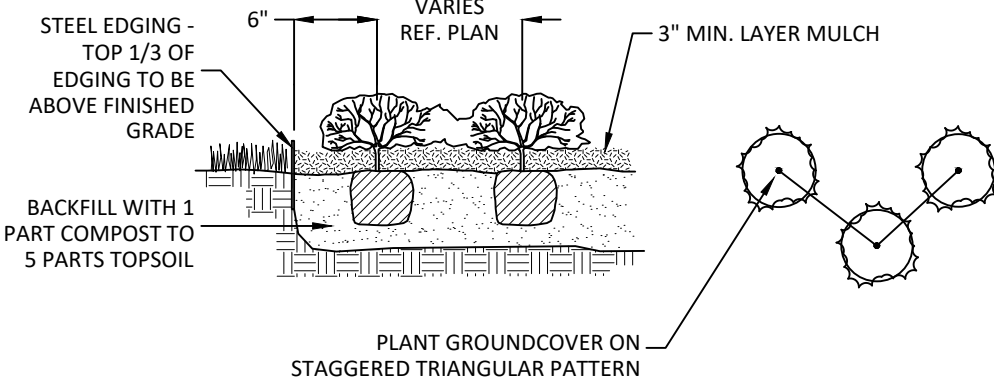

DETAIL - GROUNDCOVER PLANTING
SCALE - NTS

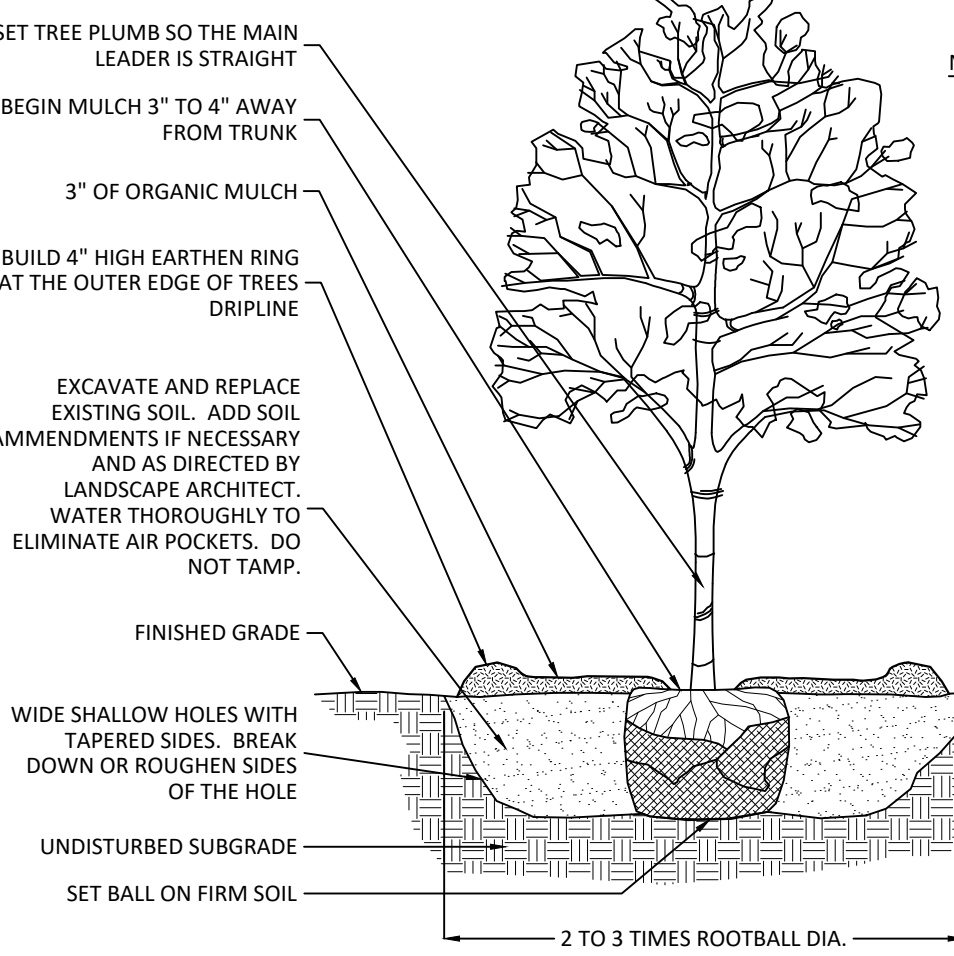

DETAIL - TREE PLANTING
SCALE - NTS

NOTES:

1. STAKE ONLY IF NECESSARY AND AS DIRECTED BY THE LANDSCAPE ARCHITECT.
2. REMOVE ANY TWINE, ROPE, FLAGGING, WRAPPING, OR GUARDS FROM TREE.
3. PRUNE ONLY DEAD OR BROKEN BRANCHES OR DOUBLE LEADERS AT TIME OF PLANTING.
4. ROOTBALL - ROOT COLLAR SHALL BE VISIBLE. REMOVE EXCESS SOIL FROM TOP OF BALL IF NEEDED. SET TOP OF BALL 1" TO 2" ABOVE FINISHED GRADE TO ALLOW FOR SETTLING. AFTER SETTLING BALL IN HOLE, CUT AWAY OR REMOVE THE ENTIRE WIRE BASKET. CUT AWAY OR REMOVE BURLAP. IF ROOTBALL BEGINS FALLING APART DURING INSTALLATION OR WHILE REMOVING THE WIRE BASKET, CUT AWAY ONLY HALF OF THE BURLAP. SCORE OR PULL APART ANY CIRCLING ROOTS.




PLANT MATERIAL LIST

SYMBOL	COMMON NAME	SCIENTIFIC NAME	QUAN.	SIZE	REMARKS
TREES					
	American Holly - Tree Form	Ilex Opaca	11	2" cal	Single trunk, full crown
	Chinese Elm	Ulmus Parvifolia	2	2" cal	Single trunk, full crown
	Serviceberry	Amelanchier	4	2" cal	Single trunk, full crown
	Sweetbay Magnolia	Magnolia Virginiana	11	2" cal	Single trunk, full crown
SHRUBS					
	Virginia Sweetspire	Itea Virginica	44	24" Mn Height	Full
	Shamrock Inkberry Holly	Ilex Glabra 'Shamrock'	39	24" Mn Height	Full
	Glossy Abelia	Abeliax grandiflora	25	24" Mn Height	Full
	Japanese Camellia	Camellia Japonica	6	24" Mn Height	Full
GROUND COVER					
	Bermuda Grass				
	Mulch				

LANDSCAPE QUANTITIES

EDGING	373 LF
LANDSCAPING MULCH	4,426 SF

ORIGINAL QUANTITY CHECK DATE: 5/20/2026 CHECKED BY INITIALS: JGB
2ND QUANTITY CHECK DATE: 5/20/2026 CHECKED BY INITIALS: JBM

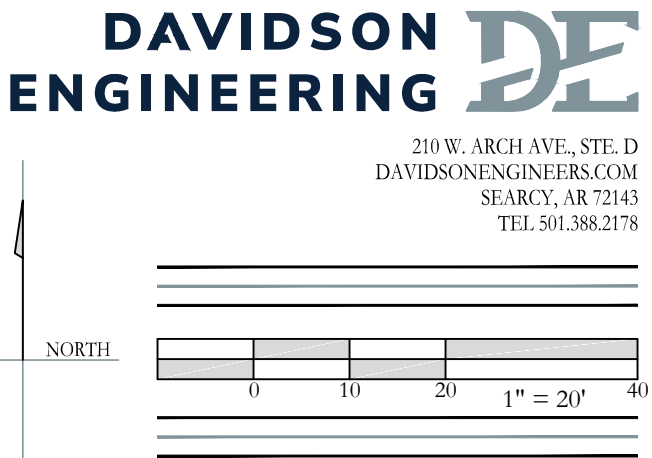

MASSARD ROAD
ARCARE

2709 MASSARD RD
FORT SMITH, AR



REVISIONS:

PROJECT NUMBER: DE25-48
DATE: MAY 2026

LI

LANDSCAPING PLAN