


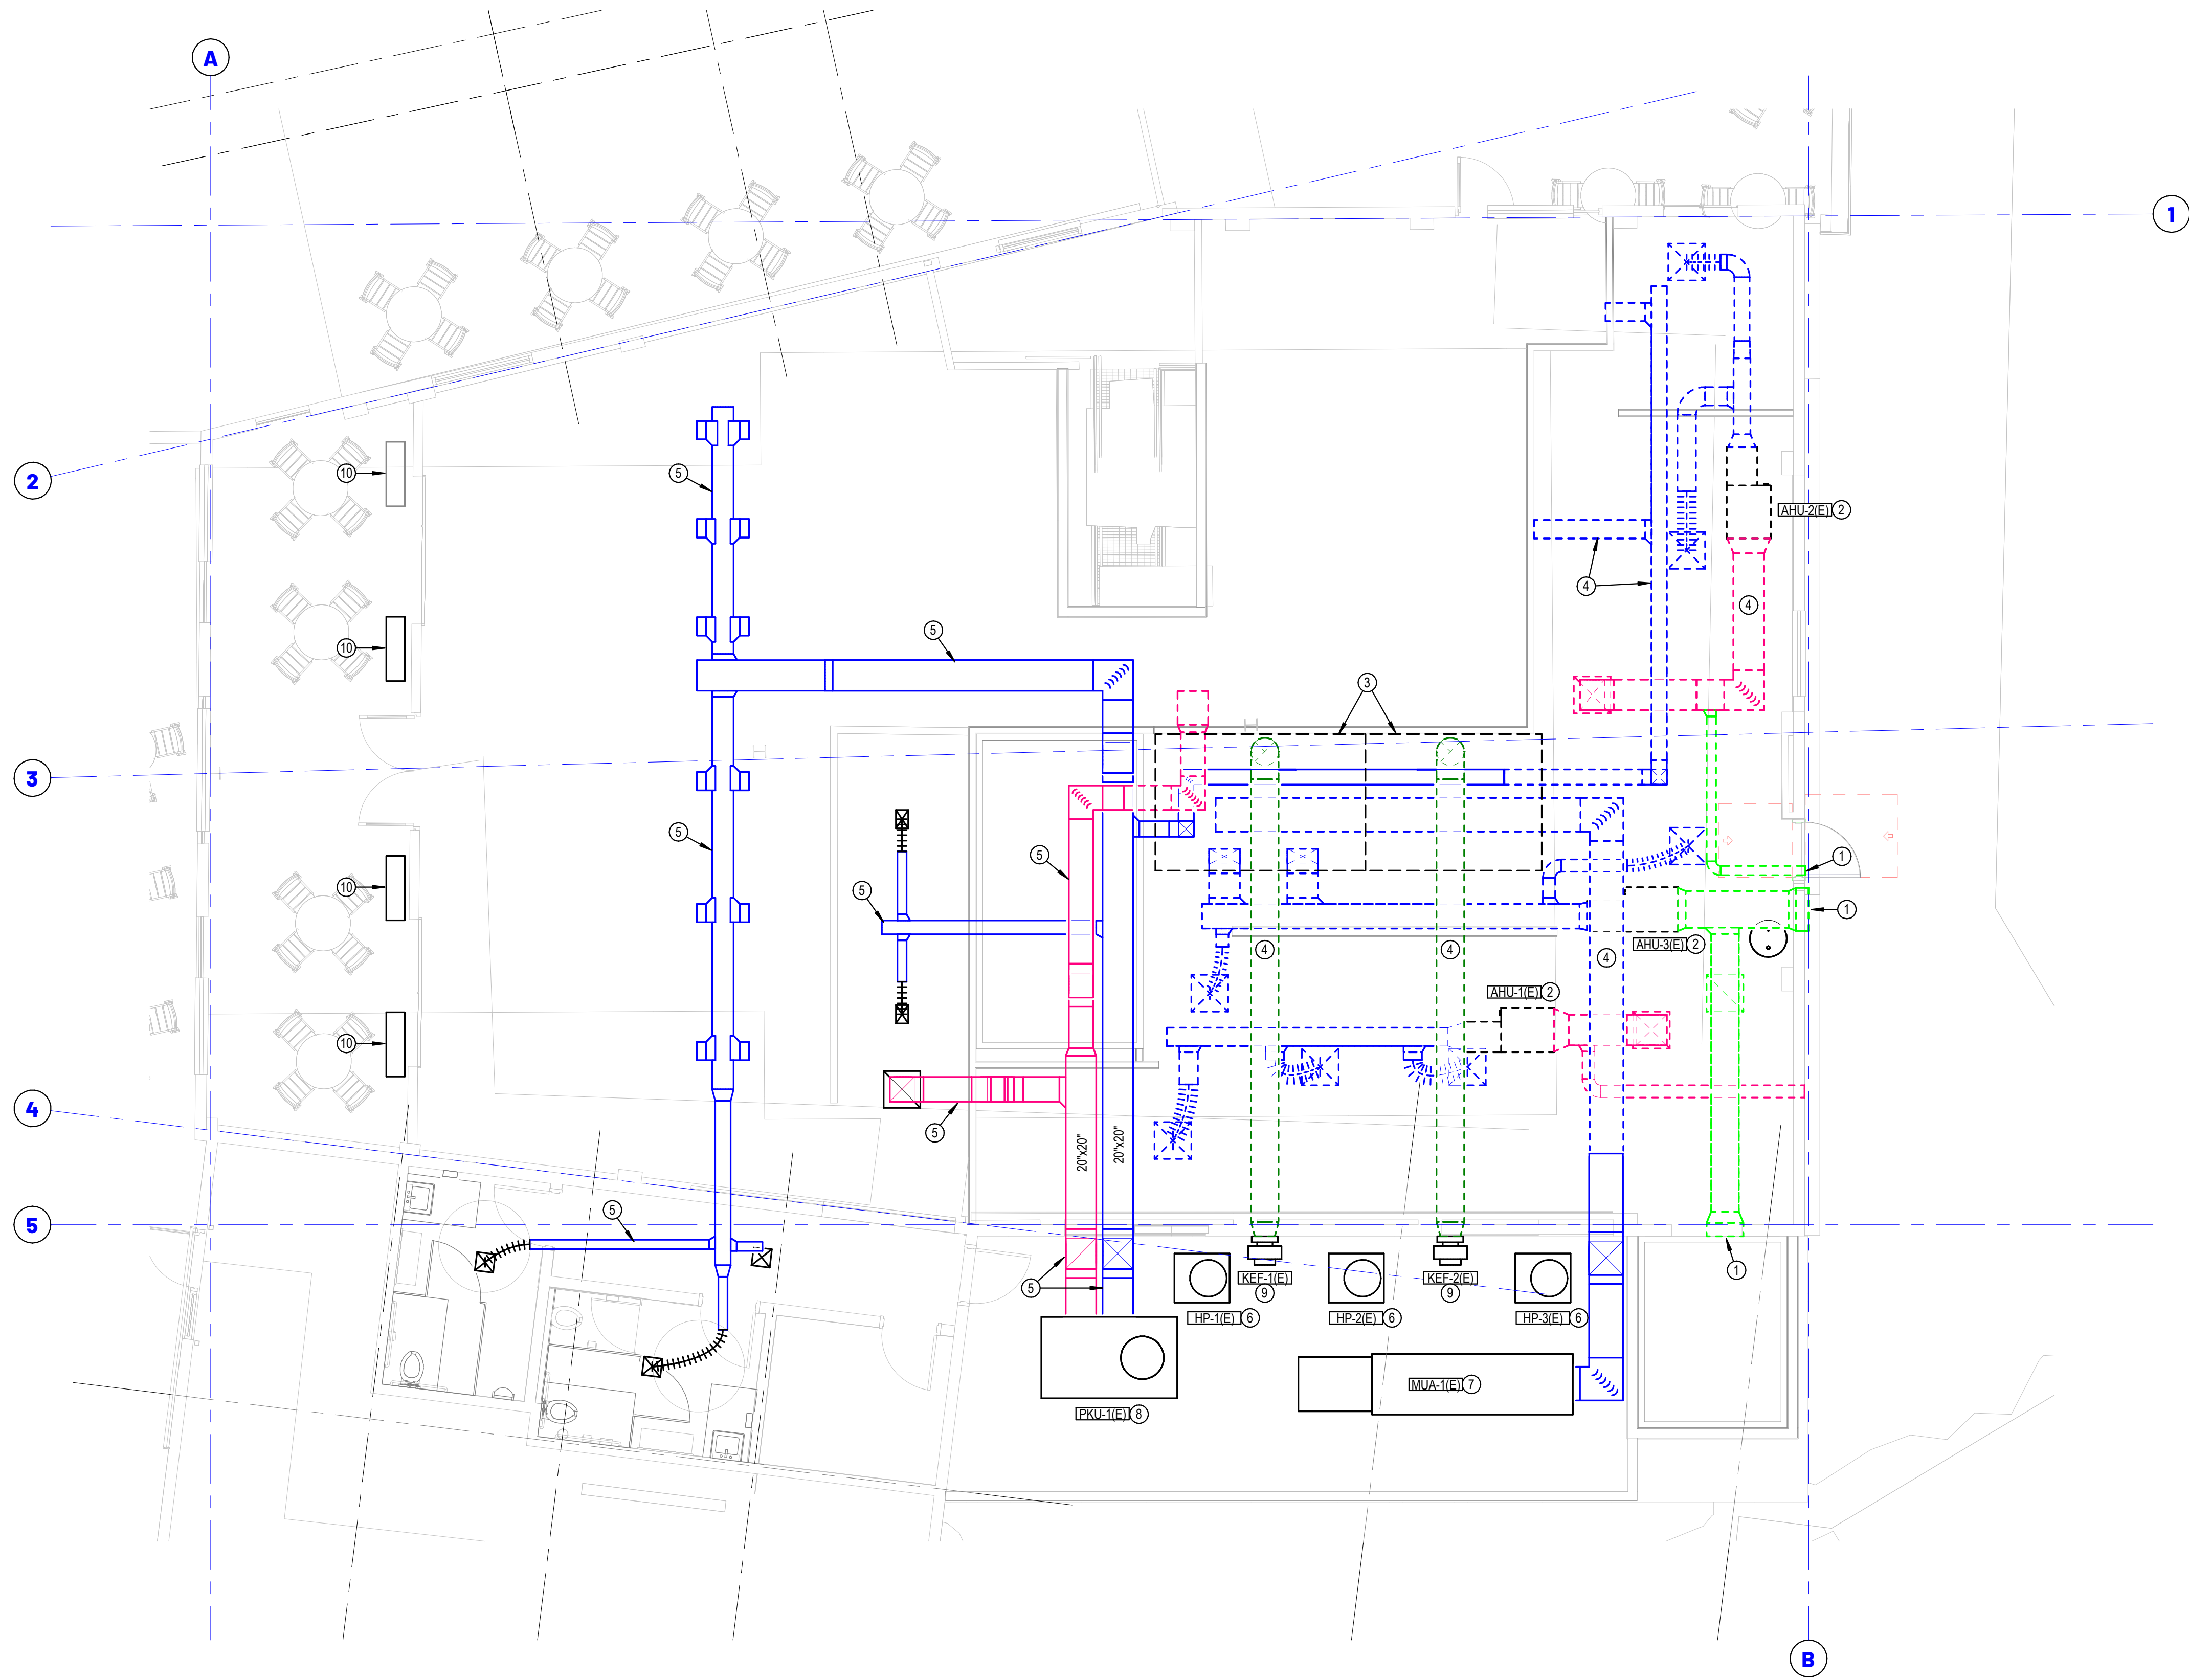

A HVAC DEMOLITION PLAN
3/16" = 1'-0"
0' 2' 4' 6' 10'


KEYED NOTES

1. DUCT PENETRATIONS AT THIS LOCATION TO BE DEMOLISHED AND BUILT BACK TO MATCH ADJACENT SURFACES. SEE ARCHITECTURAL PLANS FOR ADDITIONAL INFORMATION. PENETRATION WILL BE REQUIRED TO BE BUILT BACK WEATHER TIGHT.
2. EXISTING AIR HANDLER TO BE DISCONNECTED AND PREPARED FOR RELOCATION. SEE IMPROVEMENT PLANS FOR ADDITIONAL INFORMATION. NEW LINE SETS MAY BE REQUIRED TO BE INSTALLED. THERE SHALL NOT BE ANY JOINTS. LINESETS WILL BE REQUIRED TO BE ONE CONTINUOUS PIPING SYSTEM.
3. EXISTING KITCHEN HOODS TO BE DEMOLISHED.
4. EXISTING DUCTWORK TO BE DEMOLISHED IN ITS ENTIRETY.
5. EXISTING DUCTWORK AT THIS LOCATION TO REMAIN.
6. EXISTING CONDENSING UNITS FOR INDOOR AIR HANDLERS TO REMAIN. NEW REFRIGERANT LINES MAYBE REQUIRED.
7. EXISTING MAKE-UP AIR UNIT TO REMAIN.
8. EXISTING PACKAGED HVAC UNIT AT THIS LOCATION TO REMAIN.
9. EXISTING KITCHEN EXHAUST FANS TO REMAIN AND RE-USED. MECHANICAL CONTRACTOR TO INCLUDE PRICE TO COMPLETELY CLEAN EXISTING EXHAUST FAN ASSEMBLY PRIOR TO TURNOVER.
10. EXISTING ELECTRIC UNIT HEATERS TO REMAIN ON THE PATIO.

GENERAL NOTE:

IF EXISTING EQUIPMENT IS FOUND TO BE DEFICIENT, MECHANICAL CONTRACTOR IS RESPONSIBLE TO NOTIFY GENERAL CONTRACTOR FOR LANDLORD REPAIRS.

HUTTON
DESIGN + BUILD



ALL WORK SHOWN ON THIS DRAWING IS THE EXCLUSIVE PROPERTY OF HUTTON CORPORATION AND IS NOT TO BE COPIED OR REPRODUCED IN ANY WAY WITHOUT THE EXPRESS WRITTEN CONSENT OF HUTTON CORPORATION.

Project Number: 260050

HOME GROWN

417 MLK JR BLVD
FAYETTEVILLE, AR

Issue:
FOR PERMIT
Date:
04.20.26

REVISIONS
Description Date

M0.1

HVAC DEMOLITION PLAN