


KEYED NOTES

1. ALL MATERIALS AND EQUIPMENT IN CEILING AREA TO BE PAINTED SAME COLOR AS CEILING. COORDINATE WITH ARCHITECT.

KEYED NOTES

1. EXTEND FULL SIZE DRAIN LINE(S) FROM ICE MAKER TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION IN EXISTING FLOOR DRAIN RETAINED DURING DEMOLITION.
2. PROVIDE CONTINUOUS WASTE FITTING BELOW SINK BINS. EXTEND WASTE FROM BINS TO FLOOR SINK THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
3. EXTEND FULL SIZE WASTE FROM DISHTABLE GARBAGE DISPOSAL TO BELOW FLOOR AND EXTEND AS SHOWN.
4. EXTEND FULL SIZE WASTE FROM DISH MACHINE TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
5. EXTEND 2" WASTE FROM HAND SINK TO BELOW FLOOR AND ROUTE AS SHOWN. EXTEND 1-1/2" VENT UP FROM SINK TO ABOVE CEILING AND ROUTE AS SHOWN.
6. EXTEND FULL SIZE WASTE FROM UNDERBAR ICE CHEST TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
7. EXTEND FULL SIZE WASTE FROM GLASSWARE WASHER TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
8. EXTEND FULL SIZE WASTE FROM STEAM/OVEN TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
9. EXTEND FULL SIZE WASTE FROM SODA DISPENSER TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
10. EXTEND FULL SIZE WASTE FROM GLASS RINSER AND ESPRESSO MACHINE TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
11. EXTEND FULL SIZE WASTE FROM UNDERBAR SINK (4-COMPARTMENT) TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
12. EXTEND FULL SIZE WASTE PIPING FROM BAR SINK TO BELOW FLOOR AS SHOWN. SINK ACCESSORIES SHALL BE COORDINATE WITH OWNER PRIOR TO ORDERING. VENTING SHALL BE VIA CIRCUIT VENT.
13. 2" VENT PIPING BELOW FLOOR.
14. CONNECT NEW 3" GREASE WASTE TO EXISTING 3"(OR LARGER) GREASE WASTE MAIN IN THIS AREA. FIELD VERIFY EXACT LOCATION AND CONNECTION REQUIREMENTS.
15. EXTEND 4" VENT UP TO VENT THROUGH ROOF TERMINATION. VERIFY EXACT LOCATION OF VENT WITH ROOF WITH ROOF EQUIPMENT LOCATIONS. VENT SHALL NOT BE WITHIN 10'-0" OF ANY FRESH AIR INTAKES (NEW OR EXISTING). PLUMBING CONTRACTOR SHALL SEAL ALL ROOF PENETRATIONS WEATHERTIGHT.
16. EXTEND FULL SIZE WASTE FROM WORK TABLE SINK TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
17. ALL WALK-IN COOLER/FREEZER CONDENSATE PIPING AND TERMINATION LOCATIONS TO REMAIN AND BE REUSED.
18. EXTEND DRAIN LINE FROM WATER SOFTENER TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION.
19. EXTEND T&P RELIEF VALVE PIPING TO FLOOR SINK IN THIS AREA AND TERMINATE WITH DOWN TURNED ELBOW AND 2" AIR GAP.
20. EXTEND FULL SIZE WASTE FROM STEAM TABLE TO FLOOR SINK IN THIS AREA AND TERMINATE WITH INDIRECT WASTE CONNECTION. CUSTOMER HAS REQUESTED THE PLUMBING TO MANIFOLD ALL HOT WELLS TOGETHER THEN EXTEND ONE DRAIN LINE TO FLOOR SINK FOR SPACE SAVING.
21. EXTEND FULL SIZE WASTE FROM DISH TABLE SINK IN THIS LOCATION TO FLOOR SINK BELOW. WASTE FROM SINK SHALL BE A STRAIGHT PIPE FROM SINK TO FLOOR SINK WITH INDIRECT WASTE CONNECTION. NO 90 DEGREE ELBOWS ALLOWED IN WASTE PIPING FROM SINK.
22. COORDINATE EXACT LOCATION OF TRENCH DRAIN WITH KITCHEN EQUIPMENT SUPPORT LEGS. ALL TRENCH DRAINS SHALL BE LOCATED SUCH THAT NO EQUIPMENT LEGS ARE SUPPORTED BY TRENCH DRAIN.
23. COORDINATE EXACT LOCATION OF FLOOR SINK WITH KITCHEN EQUIPMENT. FLOOR SINK SHALL BE LOCATED SUCH THAT IT DOES NOT INTERFERE WITH KITCHEN EQUIPMENT SUPPORT LEGS AND SHALL BE LOCATED AS CENTERED AS POSSIBLE BELOW EQUIPMENT/CABINETRY ABOVE. SEE KITCHEN EQUIPMENT PLANS FOR ADDITIONAL INFORMATION.
24. CONNECT NEW 2" WASTE TO EXISTING WASTE MAIN IN THIS AREA. FIELD VERIFY EXACT LOCATION AND CONNECTION REQUIREMENTS.
25. EXTEND FULL SIZE WASTE PIPING FROM MOP BASIN TO BELOW FLOOR AS SHOWN. SINK ACCESSORIES SHALL BE COORDINATE WITH OWNER PRIOR TO ORDERING.
26. EXISTING FLOOR RECEPTOR TO REMAIN AND BE REUSED.
27. EXTEND NEW 3"WASTE AND 2"VENT TO ADJACENT MAINS IN THIS AREA. FIELD VERIFY EXACT LOCATION AND CONNECTION REQUIREMENTS.
28. INSTALL NEW FIXTURE IN SAME LOCATION AS DEMOLISHED FIXTURE. RECONNECT ALL EXISTING PIPING TO NEW FIXTURE IN THIS AREA. FIELD VERIFY EXACT LOCATIONS AND CONNECTION REQUIREMENT.
29. PROVIDE CIRCUIT VENT TO VENT WASTE FROM BAR FIXTURES AS SHOWN.

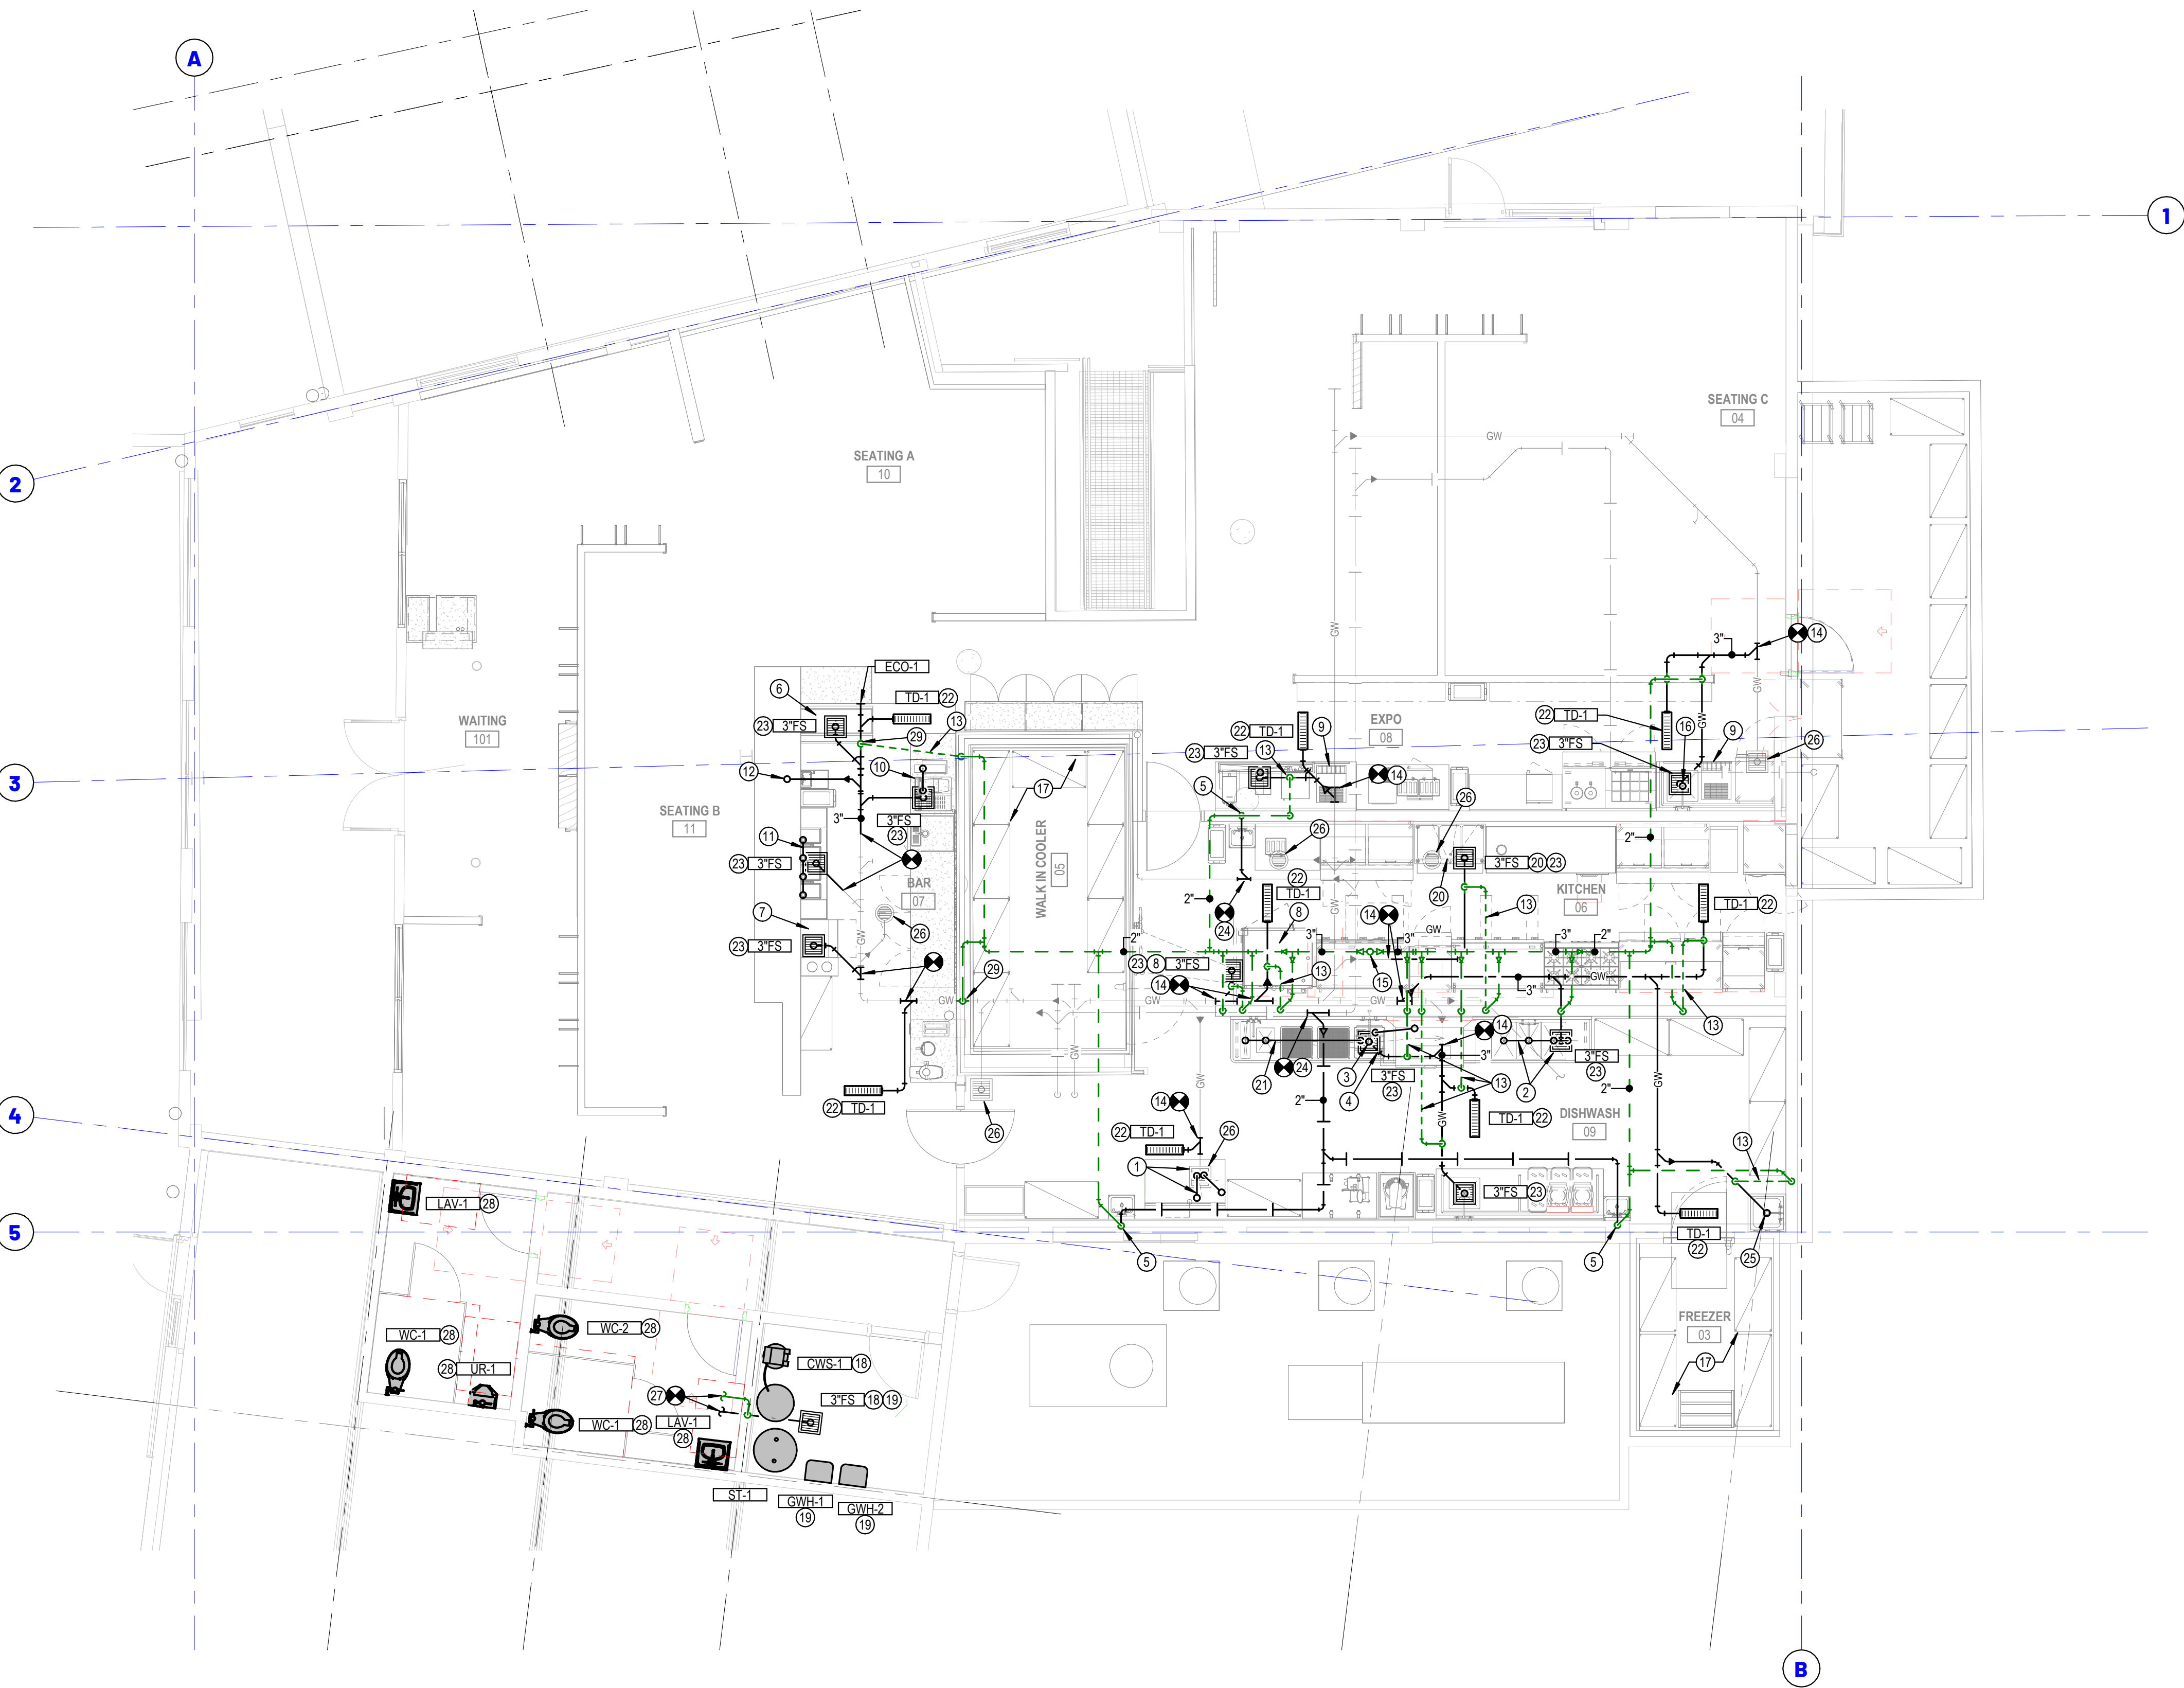

A WASTE & VENT IMPROVEMENT PLAN
3/16" = 1'-0" 0' 2' 4' 8' 16'



ALL WORK SHOWN ON THIS DRAWING IS THE EXCLUSIVE PROPERTY OF HUTTON CORPORATION AND IS NOT TO BE COPIED OR REPRODUCED IN ANY WAY WITHOUT THE EXPRESS WRITTEN CONSENT OF HUTTON CORPORATION.

Project Number: 260050

HOMEGROWN

417 MLK JR BLVD
FAYETTEVILLE, AR

Issue:
FOR PERMIT
Date:
04.20.26

REVISIONS
Description Date

P1.1

WASTE & VENT
IMPROVEMENT PLAN