

General Demolition Notes

- DEMOLITION NOTES ARE PROVIDED TO EXPLAIN THE ITEMS TO BE REMOVED, RELOCATED, AND/OR MODIFIED IN ORDER TO FACILITATE THE REMODEL AND NEW CONSTRUCTION. IT SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO PROVIDE DEMOLITION AND PATCH ITEMS, SURFACES AND AREAS AS REQUIRED TO PROVIDE NEW WORK OR TO INSTALL NEW ITEMS WHERE CALLED FOR ON THE DRAWINGS AND SPECIFICATION.
- PRIOR TO DEMOLITION AND CONSTRUCTION, IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY THE LOCATION AND CONDITION OF ALL EXISTING UTILITIES AND ELECTRICAL ITEMS (EXTERIOR AND INTERIOR) ON THE SITE AND WITHIN THE EXISTING BUILDING(S).
- CONTRACTOR TO COORDINATE WITH OWNER THE REMOVAL OF ALL ITEMS OWNER WISHES TO SALVAGE FROM EXISTING REMODEL AREAS PRIOR TO THE START OF CONSTRUCTION.
- CONTRACTOR TO VERIFY ALL UTILITY CONDITIONS. REMOVAL AND REPLACEMENT OF ANY UTILITY LINE OR CONDUIT REQUIRED TO INSTALL NEW WORK TO BE INCLUDED AS PART OF THIS BID.
- PROTECT ALL PLUMBING, MECHANICAL, ELECTRICAL, DATA EQUIPMENT, AND OTHER ITEMS NOTED OR INDICATED TO REMAIN. REFER TO PLUMBING, MECHANICAL, AND ELECTRICAL DRAWINGS FOR ADDITIONAL NOTES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO PAY FOR AND REPAIR OR REPLACE ANY ITEMS DAMAGED DURING WORK TO LIKE-NEW CONDITION PRIOR TO PROJECT CLOSE-OUT.
- REFER TO SECTIONS, PLUMBING, MECHANICAL, AND ELECTRICAL DRAWINGS FOR ADDITIONAL DEMOLITION NOTES AND INFORMATION.
- REPORT ANY DISCREPANCIES IMMEDIATELY TO ARCHITECT.
- REPAIR EXISTING WALLS AT LOCATIONS OF ANY DEMOLISHED PORTIONS OF WALLS AND DOOR FRAMES AS REQUIRED FOR NEW SURFACE AND FINISH.
- REMOVE EXISTING WALL FINISHES AS REQUIRED FOR NEW PAINT, RE- SPECIALTY PLANS
- REMOVE EXISTING LIGHTS RE- REFLECTED CEILING PLAN. REFER TO ELECTRICAL/LIGHTING PLAN FOR ADDITIONAL NOTES.
- REFER TO M.E.P DEMOLITION PLANS AND NOTES FOR ADDITIONAL REMOVAL AND/OR RELOCATION OF SYSTEMS NOT NOTED IN ARCHITECTURAL.
- REPAIR WALLS AT LOCATIONS OF ANY REMOVED MECHANICAL, ELECTRICAL OR PLUMBING ITEMS. REPAIR WALLS WITH SAME MATERIAL AS ADJACENT SURFACES TO NEW CONDITION. PAINT AS REQUIRED. WHERE ITEMS ARE REMOVED IN AREAS OF CMU, FILL IN WITH CMU TO MATCH COURSING.
- REFER TO HVAC PLANS FOR REUSE, REMOVAL AND REPLACEMENT OF EXISTING EQUIPMENT. PATCH AND REPAIR ALL EXISTING WALLS, FLOORS AND ROOFS AS REQUIRED AFTER REMOVAL OR INSTALLATION.
- ALL WALL SURFACES AFFECTED BY DEMO OR NEW WORK MUST BE REPAIRED FOR FINAL FINISH SURFACE RE- SPECIFICATION SECTION 092900 FOR TEXTURE REQUIREMENTS AT PAINTED GYP. BD. WALLS
- REMOVE EXISTING RUBBER BASE IN LOCATIONS WHICH ARE SPECIFIED ON THE DEMO SHEET
- ANY INTERRUPTION IN SERVICES MUST BE COORDINATED WITH OWNER PRIOR TO SHUT OFF.
- REPAIR WALLS TO LIKE NEW CONDITION AT ANY REMOVED SURFACE APPLIED PRODUCTS. REMOVE ANY ADHESIVE OR INCONSISTENT TEXTURE FROM WALL. REPAIR MASONRY JOINTS

DEMOLITION KEYED NOTES

#	Description
1	REMOVE MILLWORK, PATCH WALL AND FLOORING AND REPAIR AS NEEDED FOR NEW CONSTRUCTION
2	DEMO EXISTING CEILING AND PREP FOR NEW CEILING INSTALLATION. REFER TO RCP PLANS FOR EXTENTS AND NEW CEILING WORK.
3	DEMO EXISTING DOOR AND FRAME. RETURN HARDWARE TO OWNER
4	DEMO A PORTION OF EXISTING STUD WALL AND PREPARE OPENING FOR NEW WINDOW INSTALLATION.
5	PROTECT EXISTING HOT AND COLD WATER MIXING VALVE.
6	REMOVE TRAINING ROOM FURNITURE AND REINSTALL IN THE NEW TRAINING ROOM. AFTER FLOORING INSTALL
7	DEMO EXISTING LOCKERS AND PREPARE EXISTING CONCRETE BASE FOR NEW INSTALLATION.
8	REMOVE EXISTING MARKER BOARD AND RE-INSTALL IN FILM A133
9	DEMO EXISTING STUD WALL AND ALL ATTACHED MATERIALS, INCLUDING FASTENERS AND FINISHES; CLEAN AND PREP SUBSTRATE/FLOOR
10	REMOVE EXISTING BABY STATION IN THE RESTROOM AND PREP FOR NEW DOOR INSTALLATION
11	DEMO A PORTION OF EXISTING CMU WALL AND PREPARE OPENING FOR NEW DOOR INSTALLATION.
12	REMOVE THE EXISTING FOOTBALL HELMET STORAGE RACK AND RELOCATE TO STORAGE A132 PATCH AND REPAIR HOLES NOT COVERED BY NEW MARKER BOARD
13	DEMO A PORTION OF WALL AND EXISTING Z-GIRTS, INSULATION, AND (FRT) PLYWOOD AND PREP FOR NEW DOOR INSTALLATION.
14	EXISTING EPOXY FLOORS DO NOT REQUIRE DEMO. EPOXY FLOOR CONTRACTOR TO PREP EXISTING EPOXY FLOOR AND BASE AS REQUIRED, TO INSTALL NEW EPOXY FLOOR OVER EXISTING
15	REMOVE EXISTING ICE MACHINE AND RE-INSTALL AFTER FLOORING INSTALL.
16	REMOVE SECTION OF WALL FOR NEW OPENING. REFERENCE REFLECTED CEILING PLANS.
17	PATCH, REPAIR, AND REPAINT THE AFFECTED SURFACE TO MATCH ADJACENT FINISHES AFTER REMOVAL OF THE ROOM SIGN, AND RELOCATE THE SIGN AS INDICATED IN THE SPECIALTY PLANS.
18	REMOVE EXISTING COAT RACK 2X AND WOOD HOOKS. PATCH AND REPAIR WALL
19	REMOVE AND RELOCATE MARKER BOARD; RE-SPECIALTY PLANS
20	REMOVE RUBBER BASE @ MILLWORK FOR NEW EPOXY FLOOR INSTALL
21	REMOVE SECTION OF CEILING FOR INSTALL ACCESS OF NEW LOCKER ROOM MICROPHONES; RE-ELEC
22	REMOVE LETTERING AND ARTWORK; RETURN TO OWNER
23	DEMO EXISTING CONDUIT ON THE WALL
25	DEMO EXISTING ROOM SIGNAGE
26	REMOVE AND RE-INSTALL EXISTING 2' X4' LIGHTING FIXTURE; RE-ELEC


Demo Plan Legend

- EXISTING 2' X 4' LIGHTING FIXTURE; TO REMAIN; RE-ELEC
- REMOVE AND RE-INSTALL EXISTING 2' X4' LIGHTING FIXTURE; RE-ELEC
- EXISTING 2' X 4' CEILING GRID; TO REMAIN
- DEMO EXISTING CEILING GRID; AS SHOWN IN DEMO RCP PLANS
- EXTENTS OF EXISTING EPOXY FLOOR TO BE PREPARED FOR NEW EPOXY INSTALLATION.
- EXTENTS OF CONCRETE LOCKER BASE TO BE REMOVED




G13 A2.0 - Demo pictures
3/8" = 1'-0"


G9 Enlarged Demo RCP - Area A
1/8" = 1'-0"

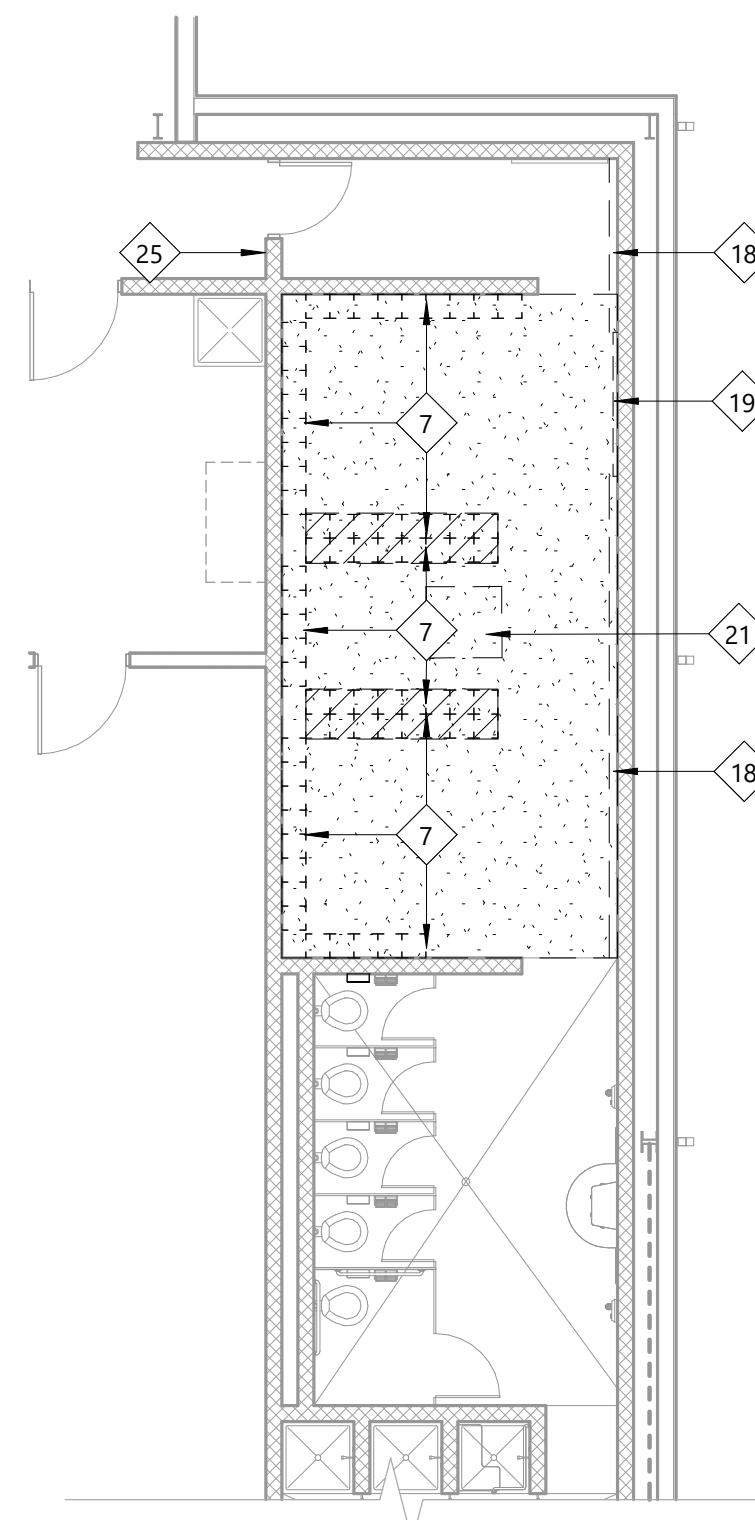

A9 Enlarged Demo Floor Plan - Area B
1/8" = 1'-0"

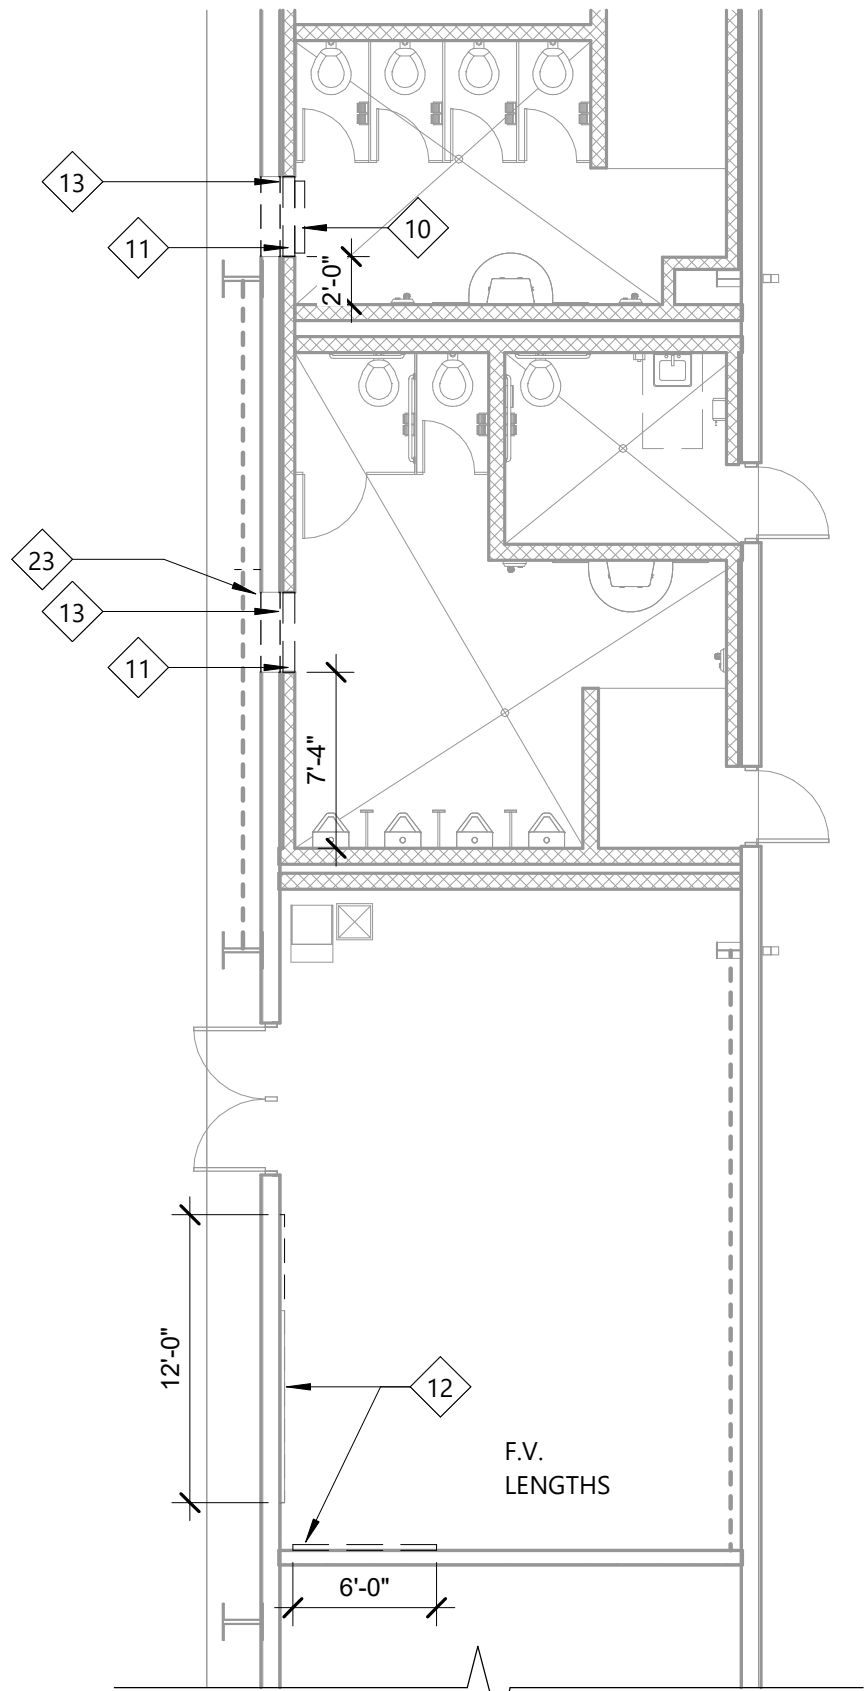

A12 Enlarged Demo Floor Plan - Area C
1/8" = 1'-0"

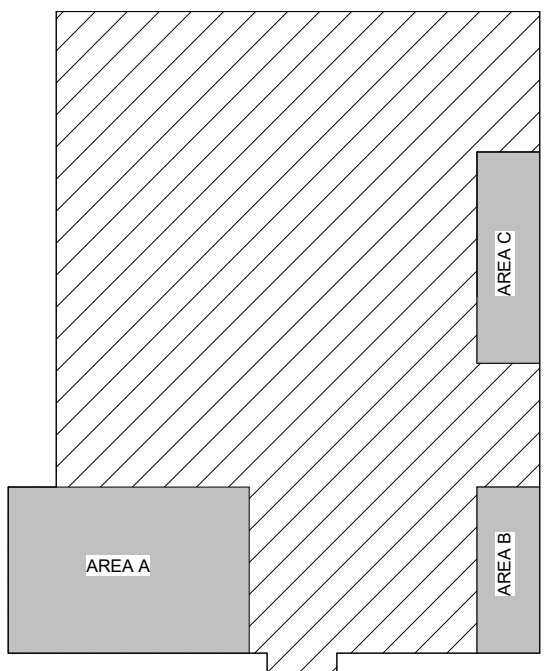

KEYPLAN



Hight Jackson
ASSOCIATES
5201 W Village Parkway, Suite 300 | Rogers, Arkansas 72768 | (479) 464-4965 | www.hjarch.com


BENTONVILLE SCHOOL DISTRICT #6
BWHS - DEN Remodel
1355 GAMBLE ROAD, CENTERTON, ARKANSAS


DRAWN BY:
MS
CHECK BY:
TS
ISSUE DATE
04/06/2026

PROJECT NO.
2421
REVISION DATES

DEMOLITION PLAN
S H E E T
A2.0


COPYRIGHT 2026
THESE DRAWINGS AND SPECIFICATIONS ARE
THE EXCLUSIVE PROPERTY OF
HIGHT JACKSON ASSOCIATES P.A.
USE OR REPRODUCTION IS PROHIBITED
WITHOUT WRITTEN CONSENT

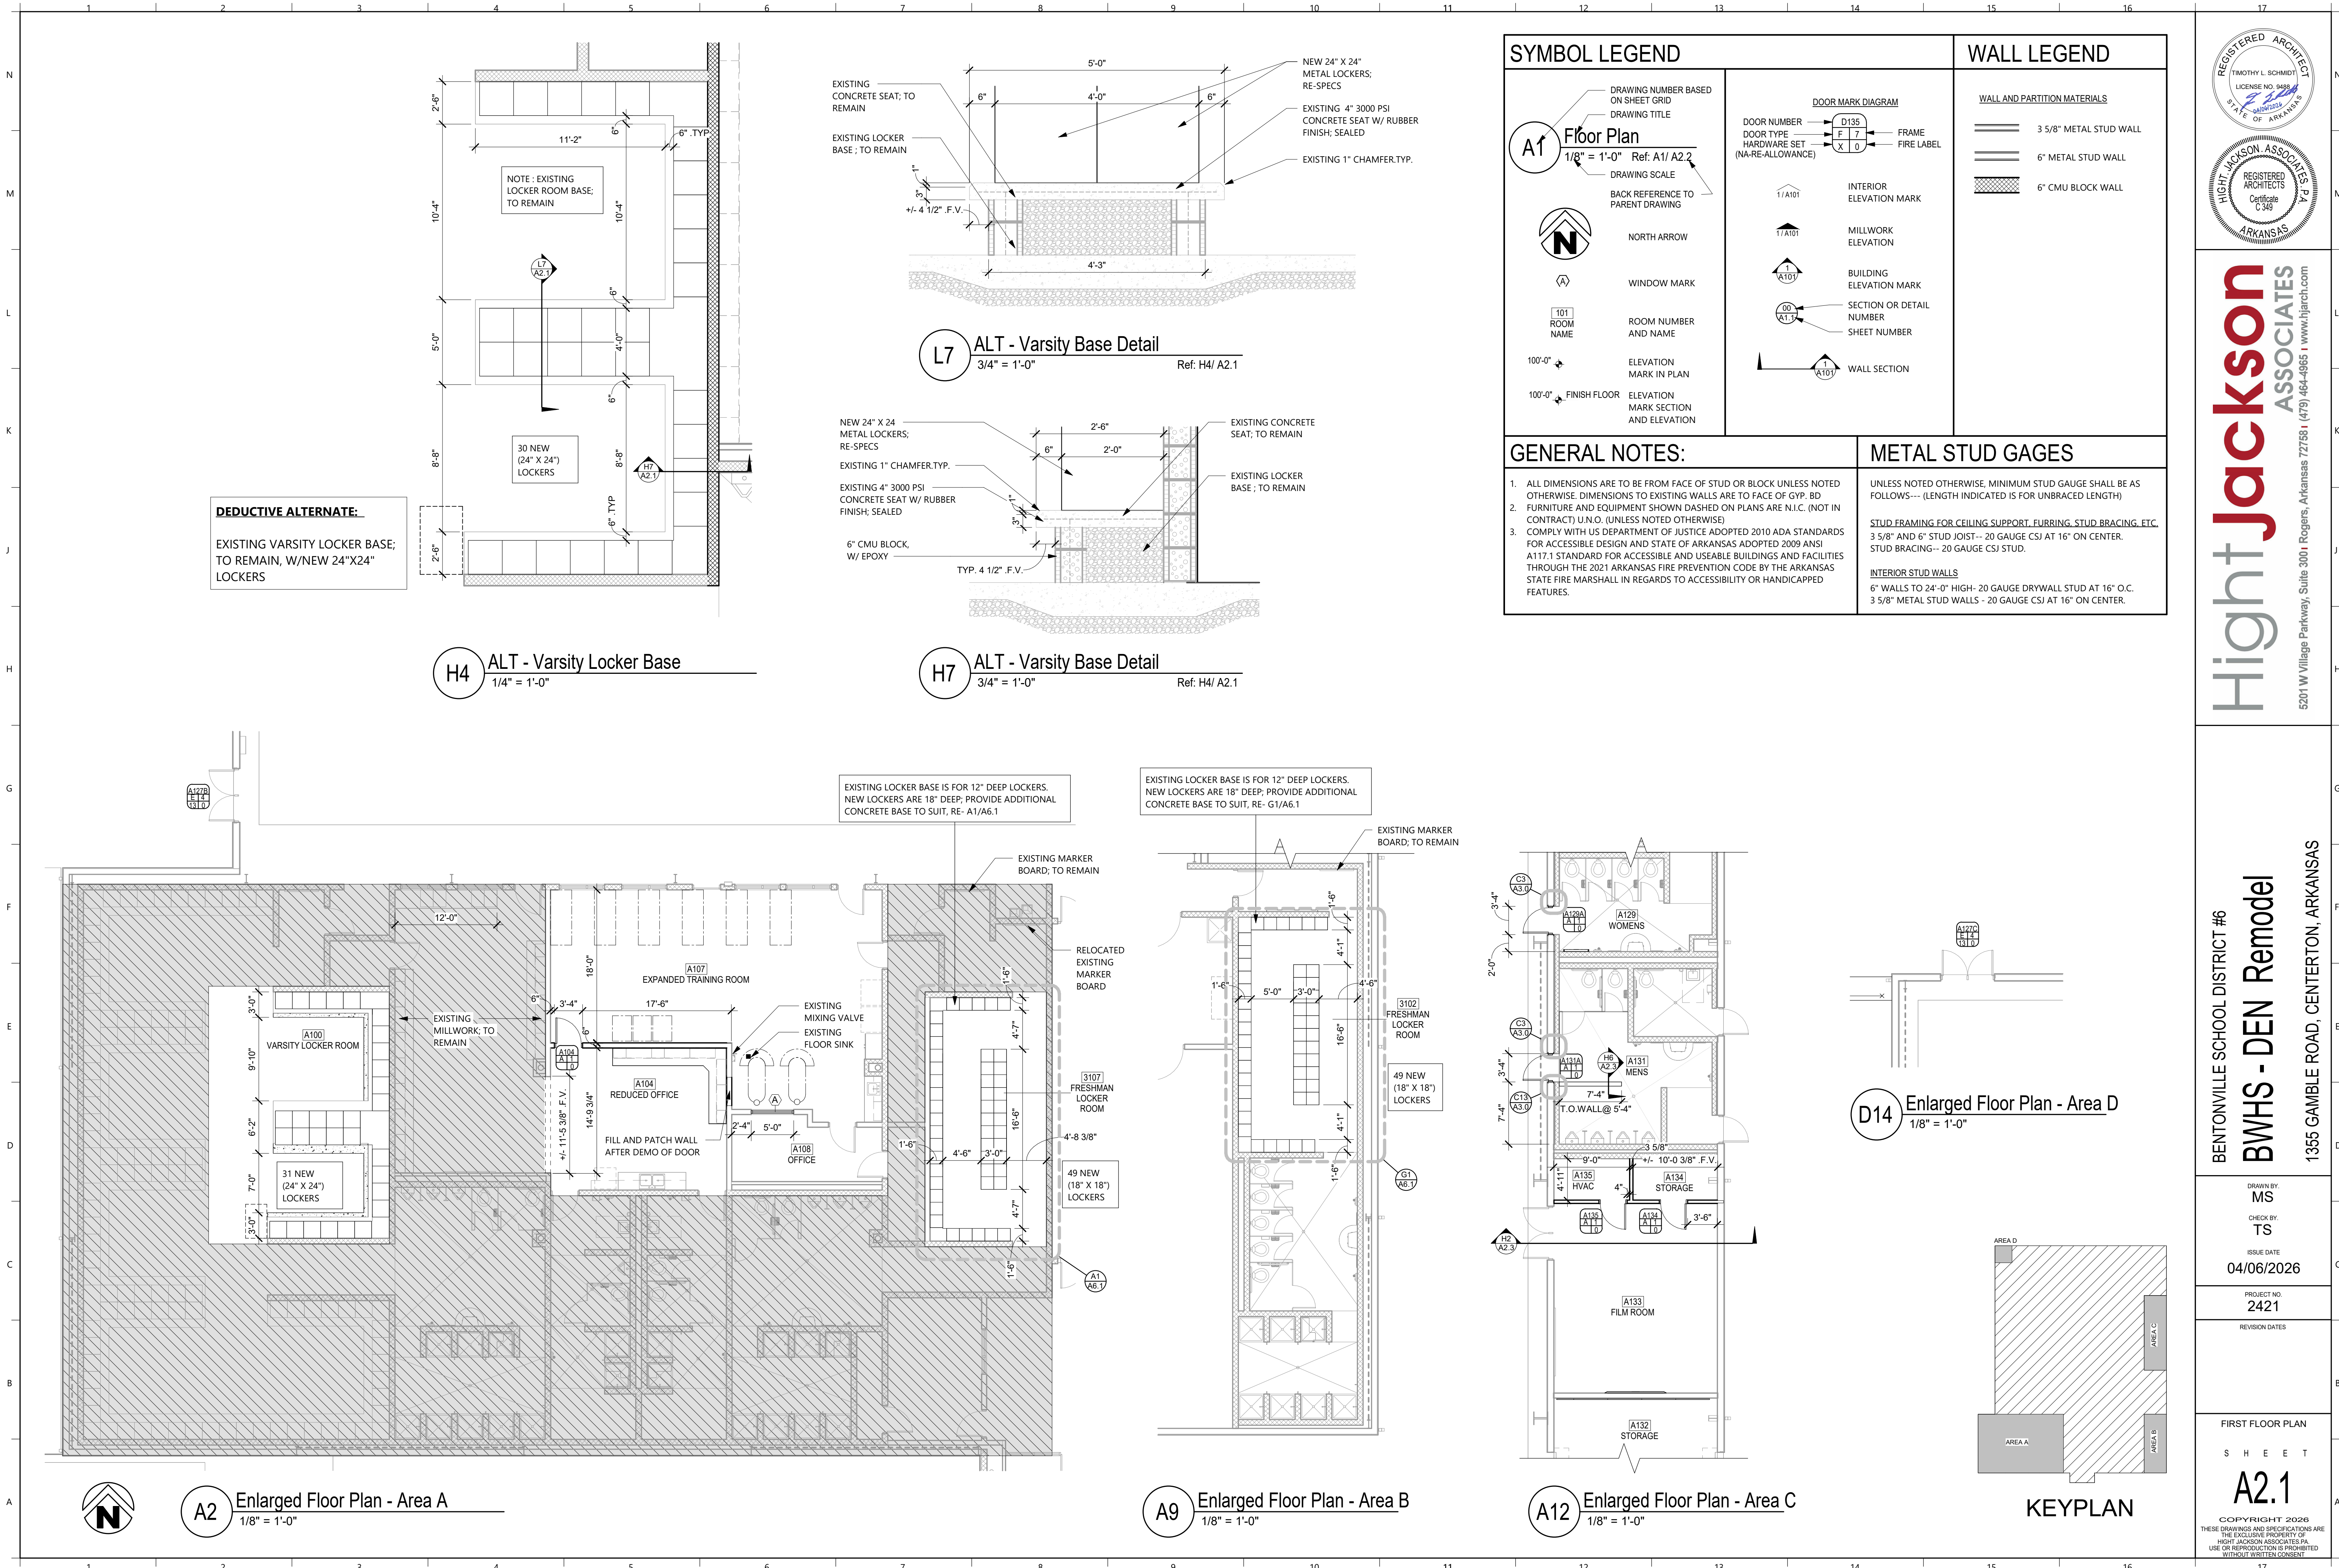

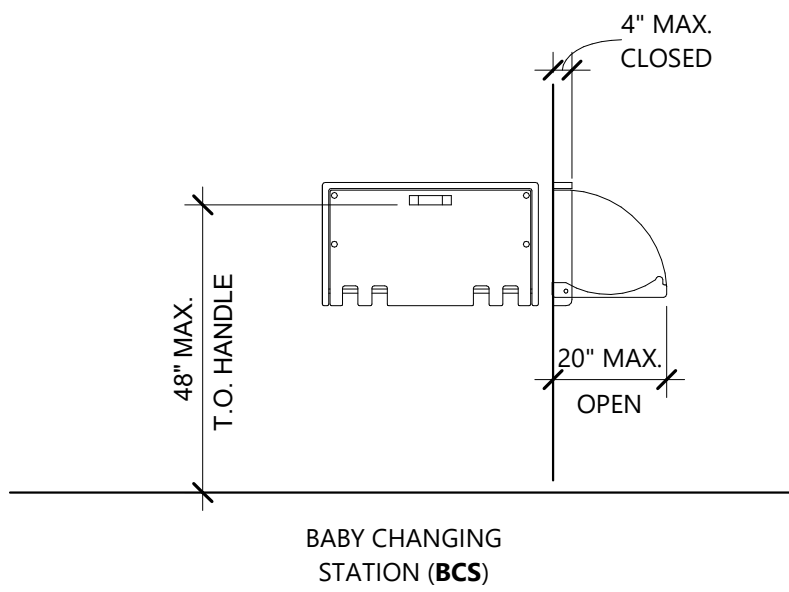


L1 BCS Detail
3/8" = 1'-0"

SIGN SHALL BE MOUNTED ON THE WALL ADJACENT TO LATCH SIDE OF DOOR. WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON THE NEAREST ADJACENT WALL. MOUNTING HEIGHT SHALL BE 60" A.F.F. TO THE TOP OF SIGN. MOUNTING LOCATION FOR SIGN SHALL BE SO THAT A PERSON MAY APPROACH WITHIN 3' OF SIGNAGE WITHOUT ENCOUNTERING PROTRUDING OBJECTS OR STANDING WITHIN THE SWING OF A DOOR.

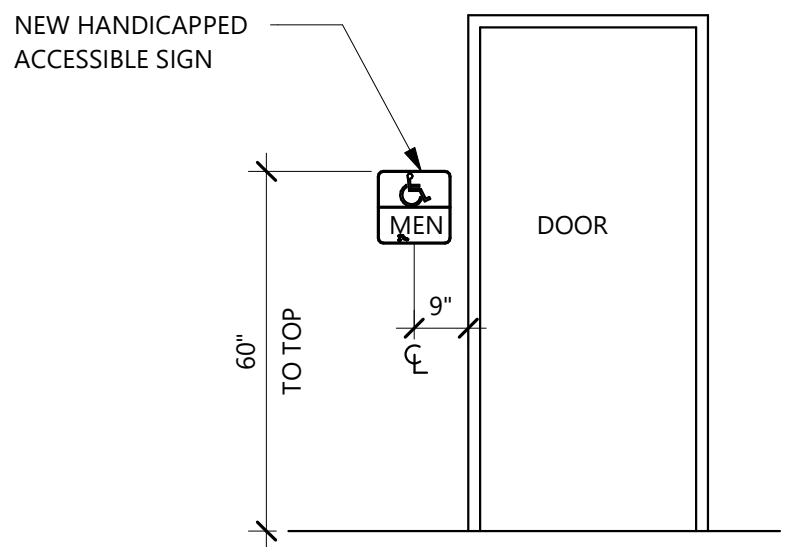


G1 Room Signage Detail
3/8" = 1'-0"

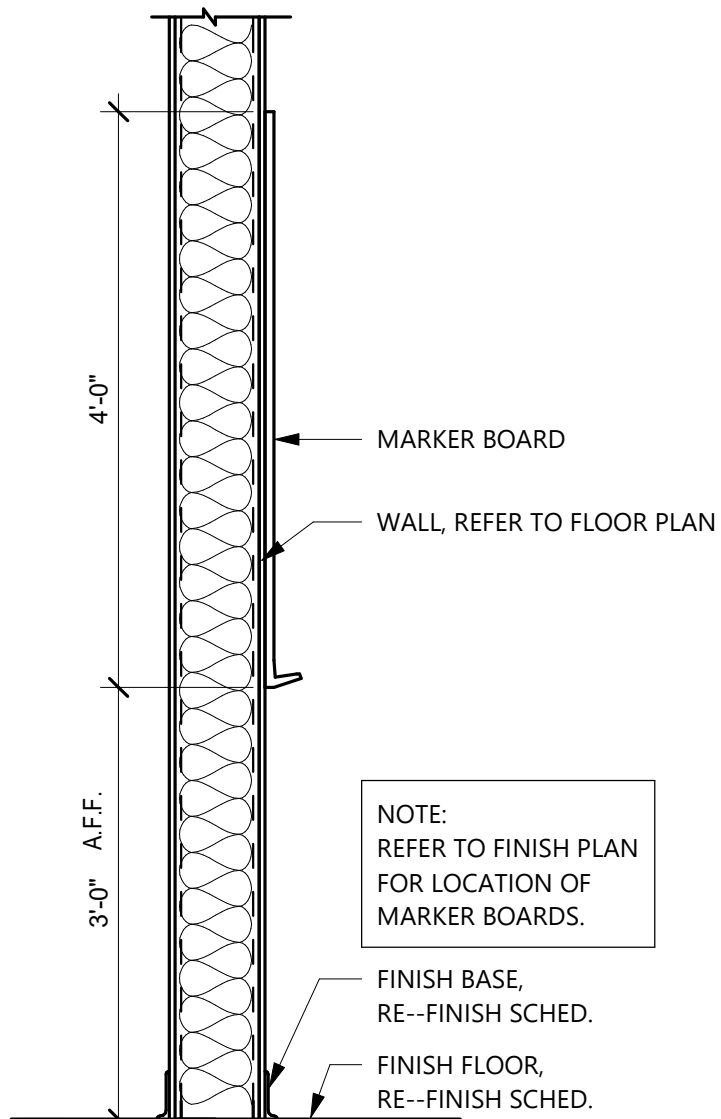


G3 Marker Board Section
3/4" = 1'-0"


Sign Design Types

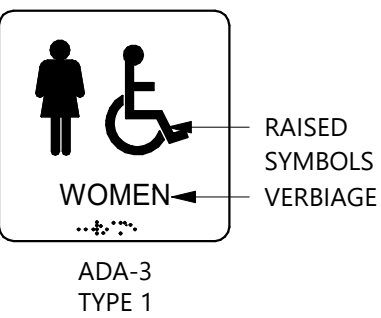

ADA-3
TYPE 1

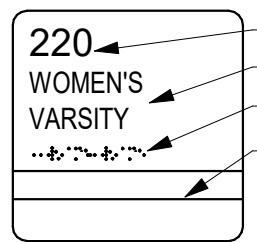

TYPE 2

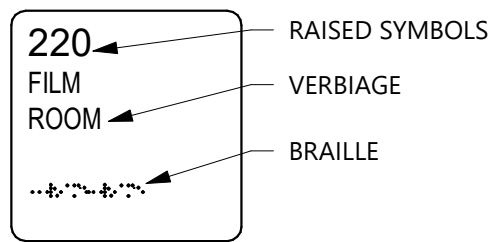

TYPE 3

Room Sign Notes:

- NEW SIGNAGE PROPOSED NEEDS TO MATCH THE EXISTING
- SIGNAGE TEXT TO BE CONFIRMED DURING SUBMITTAL PHASE.
- ALL OTHER SIGNAGE TO BE OWNER PROVIDED.
- ALL INTERIOR SIGNAGE IS TO BE MOUNTED AT 60" AFF TO TOP OF SIGN.

Room Signage Schedule

#	ROOM NAME	DESIGN
1	WOMEN'S RESTROOM	TYPE 1
2	MEN'S RESTROOM	TYPE 1
3	MEN'S LOCKER ROOM	TYPE 2
4	WOMEN'S LOCKER ROOM	TYPE 2
5	FILM ROOM	TYPE 3
EX	EXISTING SIGN; TO REMAIN	
EX-R	RELOCATED EXISTING SIGN	

General Finish Notes

- PROVIDE 1 LAYER 5/8" TYPE X GYPSUM BOARD AT METAL STUD WALLS, UNLESS OTHERWISE NOTED IN DRAWINGS.
- PROVIDE ZINC TERMINATION STRIP WHERE EPOXY FLOOR FINISH TRANSITIONS TO ANOTHER FLOOR MATERIAL.
- REFER TO REFLECTED CEILING PLANS FOR ALL CEILING HEIGHTS AND METAL STUD WITH GYPSUM BOARD HEADWALLS AND FURR DOWN LOCATIONS.
- UNLESS NOTED OTHERWISE, PAINT WALLS WITHOUT CEILINGS FULL HEIGHT TO UNDERSIDE OF DECK.
- PROVIDE A 48" WIDE STRIP OF 6" THICK UNFACED BATT INSULATION ABOVE CEILINGS ON BOTH SIDES OF WALL SEPARATING ROOM A107 FROM A104 AND ALL 3 INTERIOR WALLS OF ROOM A133
- PROVIDE OUTSIDE CORNER GUARDS AS SPECIFIED ON ALL GYPSUM BOARD OUTSIDE CORNERS UNLESS NOTED OTHERWISE.
- UNLESS NOTED OR SHOWN ON DRAWINGS OTHERWISE, TERMINATE ALL NON-BEARING, NON-RATED PARTITIONS A MINIMUM 6" TO 8" ABOVE HIGHEST ADJACENT CEILINGS.
- UNLESS SHOWN OTHERWISE PROVIDE 4" RUBBER BASE AT ALL MILLWORK TOE SPACES.
- PROVIDE SOLID WOOD BLOCKING IN WALLS FOR MOUNTING MILLWORK.
- REFER TO ELECTRICAL DRAWINGS FOR ALL ELECTRICAL OUTLETS AND SWITCH LOCATIONS. COORDINATE ALL ELECTRICAL OUTLETS AND SWITCHES WITH MILLWORK.
- FLOOR MATERIAL TRANSITIONS AT DOORWAYS SHALL HAPPEN BELOW DOOR LEAF IN CLOSED POSITION.
- REFER TO SPECIALTY PLANS FOR DETAILED FINISH INFORMATION, COLORS, & ACCENT WALLS NOT FOUND IN FINISH SCHEDULE.
- PROVIDE CLEAR CONCRETE SEALER AT ALL EXPOSED CONCRETE FLOORS, BLEACHER TREADS, AND CONCRETE STEPS.
- IN ROOMS SHOWN TO TAPE AND FLOAT GYPSUM BOARD OR NOT TO PAINT CMU, WALLS ARE TO BE CLEANED OF ANY MARKING OR DIRT. ALL GYPSUM BOARD IS TO BE REPAIRED IF DAMAGED.
- ALL HOLLOW METAL DOORS AND FRAMES TO BE PAINTED; PT-12
- PREPARE EXISTING SURFACES FOR NEW FINISHES.

Keyed Finish Notes (KN-1)

- FOR EXISTING EPOXY FLOOR, REPAIR ANY CRACKS AND PREPARE FOR NEW EPOXY INSTALLATION IN EXISTING TRAINER OFFICE
- NEW RUBBER BASE TO MATCH EXISTING

FINISH LEGEND





BASE		
RB	RUBBER BASE	JOHNSONITE #20 CHARCOAL
NB	NO BASE	-
EB-3	4" EPOXY BASE	DESCO CREMONA EPOXY BASE TO MATCH EF-3
CEILING		
AC-1	2"x4" ACOUSTICAL CEILING TILE	WHITE SUSPENDED ACOUSTICAL CEILING
EP-4	GYPSUM BOARD	EPOXY PAINTED, SW7049 NUANCE
FLOORS		
EF-3	EPOXY FLOOR	DESCO CREMONA TG-408
SC	SEALED CONCRETE	-
PC	POLISHED CONCRETE	CLEAR
MILLWORK		
TFL-1	MELAMINE CABINET BODY	FLORENCE WALNUT 7993-38
HPL-1	PLASTIC LAMINATE	PIONITE, SUEDE, GOLD PANIN - AT 710
WALLS		
PT-1	PAINT	SW7051 ANALYTICAL GRAY
PT-4	PAINT	SW7049 NUANCE
EP-X	EPOXY PAINT	X REPRESENTS PAINT NUMBER FROM WALL COLOR LISTED ABOVE
PT-12	PAINT	BENJAMIN MOORE 2134-30 IRON MOUNTAIN
TF	GYP. BOARD - TAPE/FLOAT ONLY	

SPECIALTY PLAN LEGEND

R-MB	RELOCATED 8' MARKER BOARD, RE-2.2
EX-MB	EXISTING MARKER BOARD, TO REMAIN
R-M6	RELOCATED 6' MARKER BOARD, RE-2.2
TV	TV MOUNTING BRACKET; RE-ELEC
CG	CORNER GUARD
1	SIGN TYPE, RE- ROOM SIGNAGE SCHEDULE
EX-BCS	RELOCATED BABY CHANGING STATION
	EXTENTS OF NEW EPOXY FLOOR

LOCKER SCHEDULE

1	24"x24"x60" NEW STADIUM LOCKER (31 TOTAL) (30 TOTAL @ DEDUCTIVE ALTERNATE)
2	18"x18"x72" NEW STADIUM LOCKER (98 TOTAL)

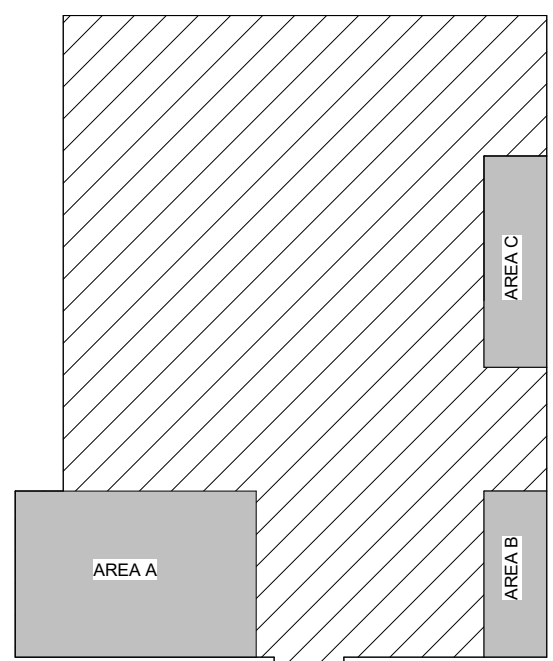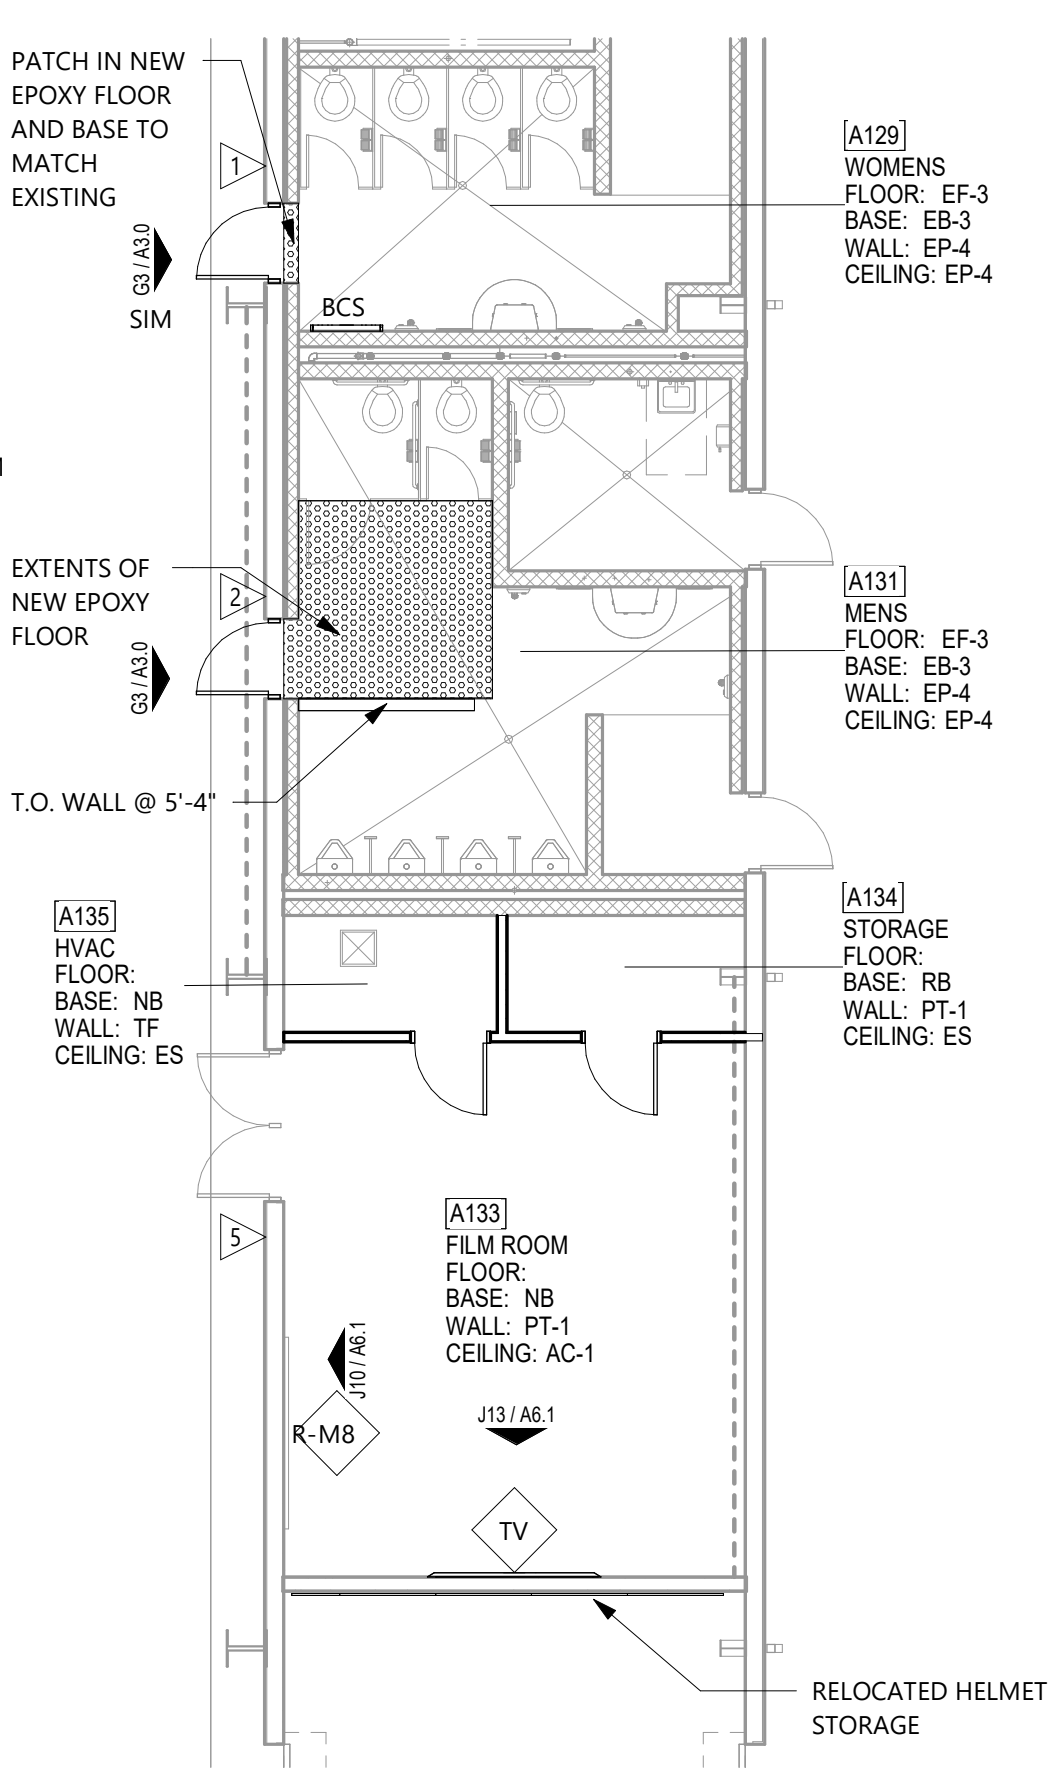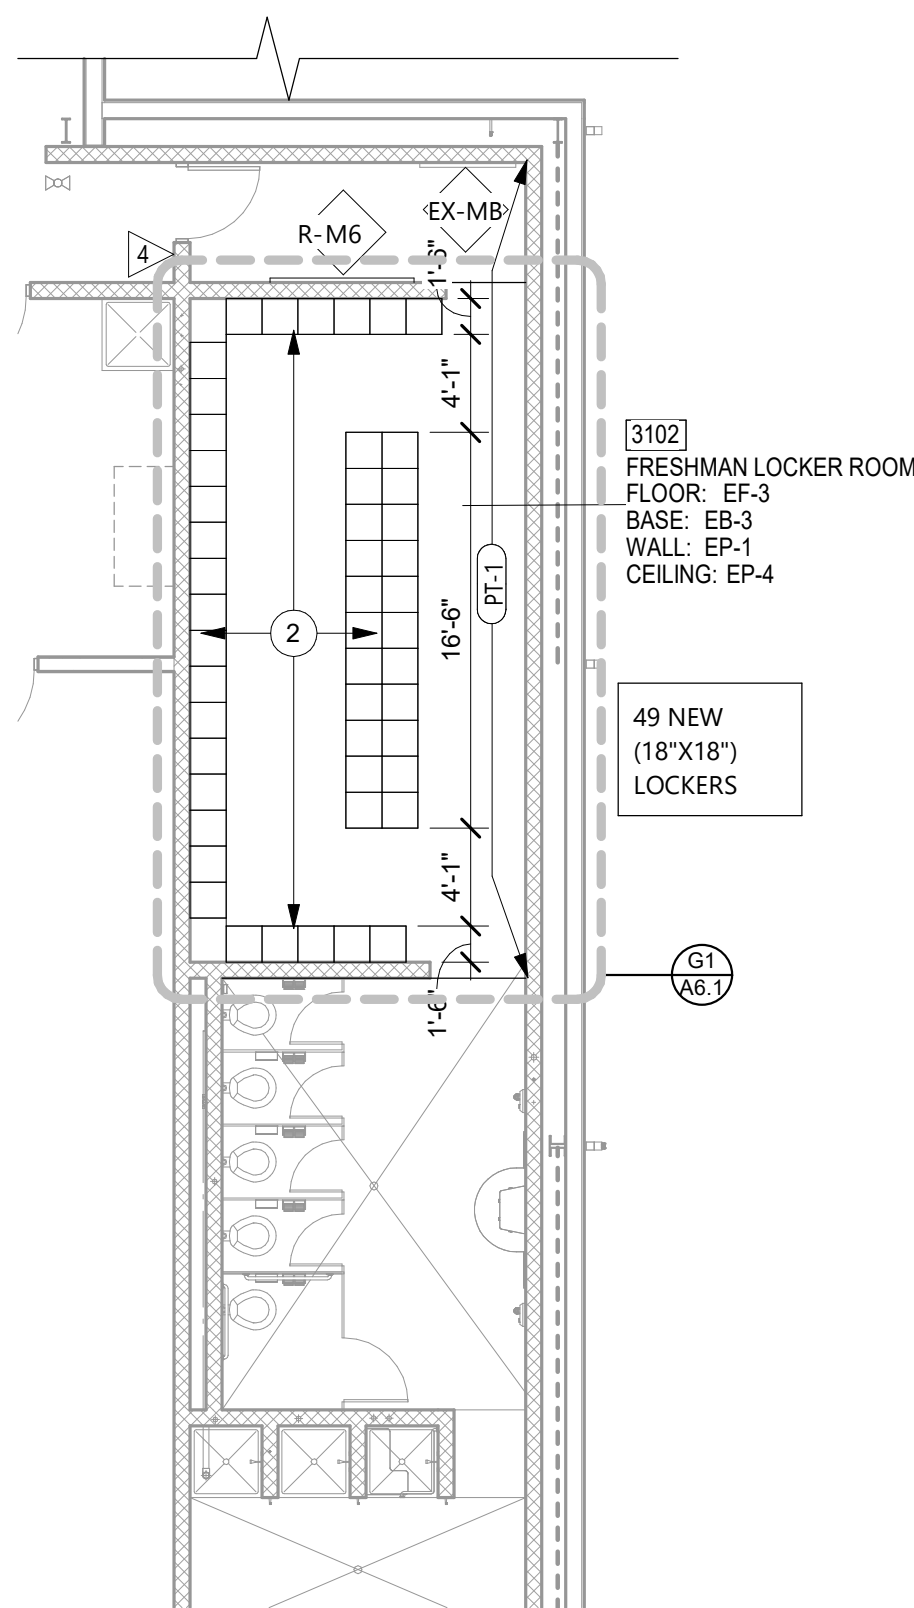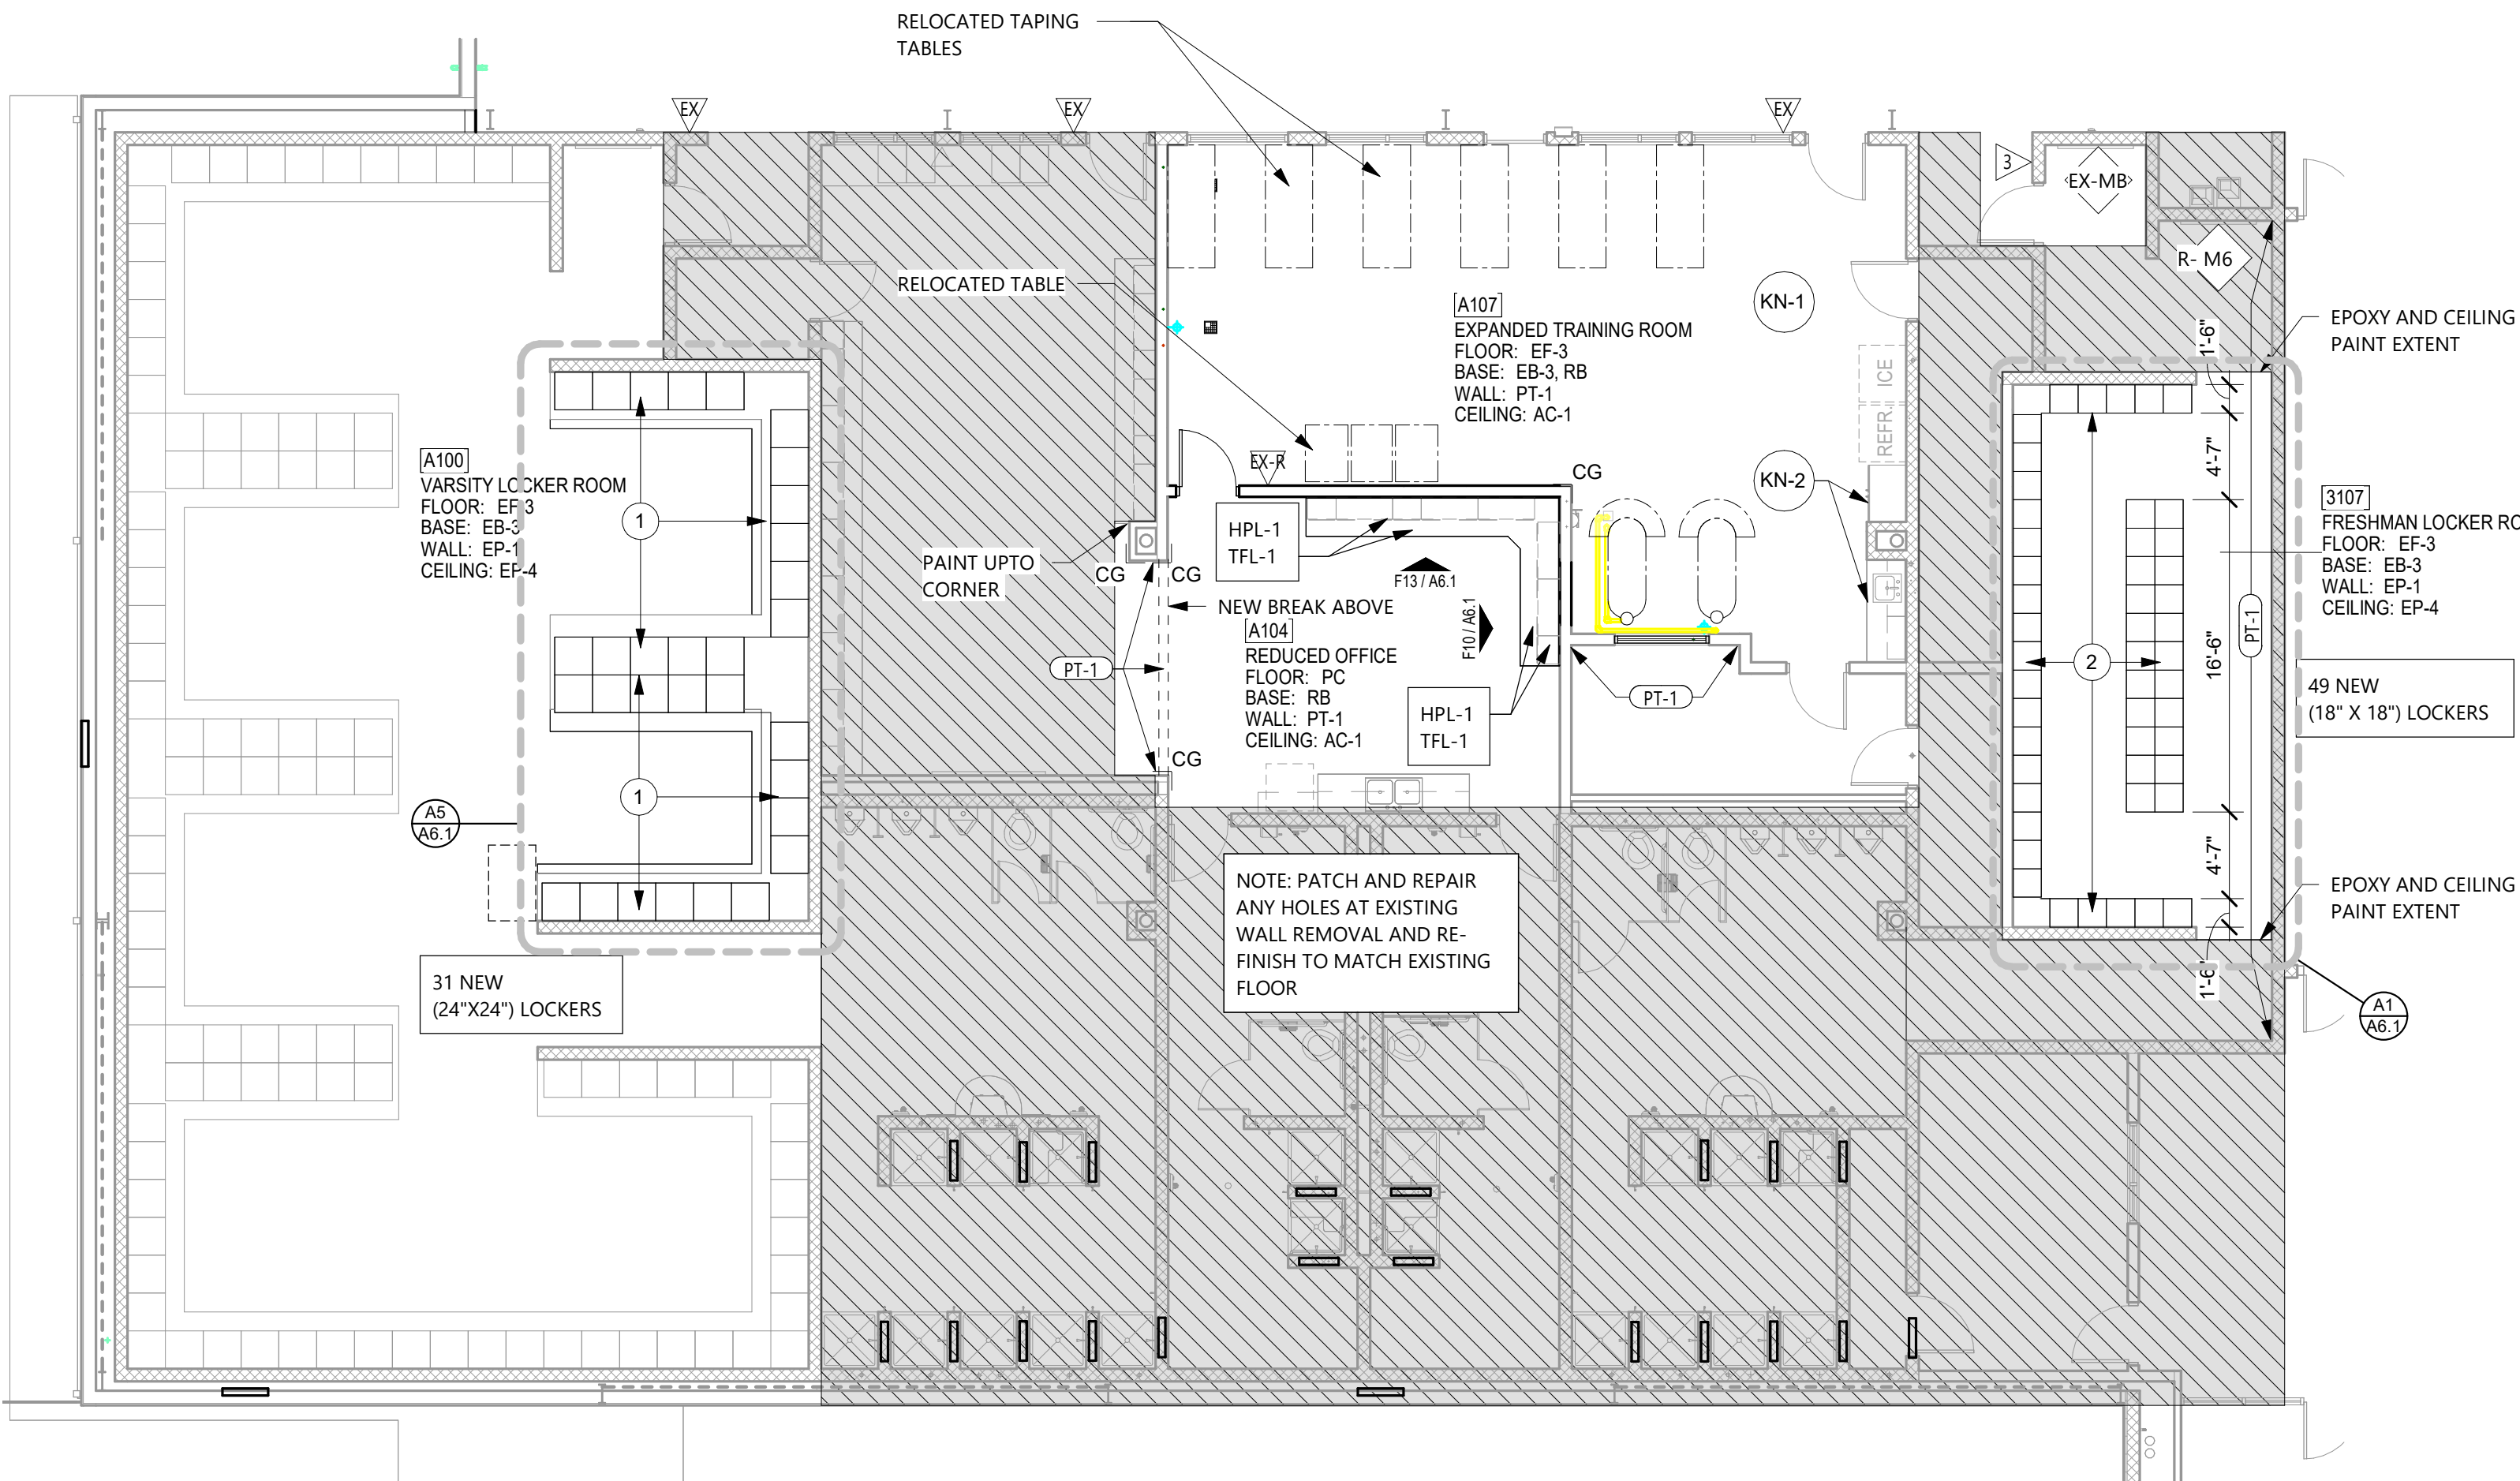

A1 Specialty Floor Plan- Area A
1/8" = 1'-0"



A9 Specialty Floor Plan- Area B
1/8" = 1'-0"
Ref: H2/ A2.3



A12 Specialty Floor Plan- Area C
1/8" = 1'-0"
Ref: H2/ A2.3



Hight Jackson ASSOCIATES
5201 W Village Parkway, Suite 301, Rogers, Arkansas 72781 (479) 464-4965 | www.hjarch.com



BENTONVILLE SCHOOL DISTRICT #6
BWHS - DEN Remodel
1355 GAMBLE ROAD, CENTERTON, ARKANSAS

DRAWN BY:
MS
CHECK BY:
TS
ISSUE DATE:
04/06/2026

PROJECT NO:
2421

REVISION DATES

SPECIALTY FLOOR PLANS
S H E E T
A2.2
COPYRIGHT 2026
THE EXCLUSIVE PROPERTY OF
HIGHT JACKSON ASSOCIATES P.A.
USE OR REPRODUCTION IS PROHIBITED
WITHOUT WRITTEN CONSENT

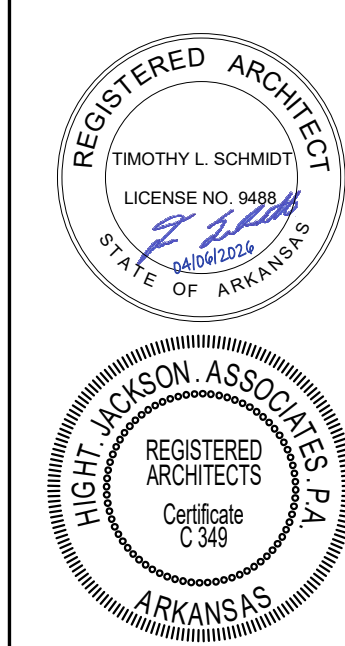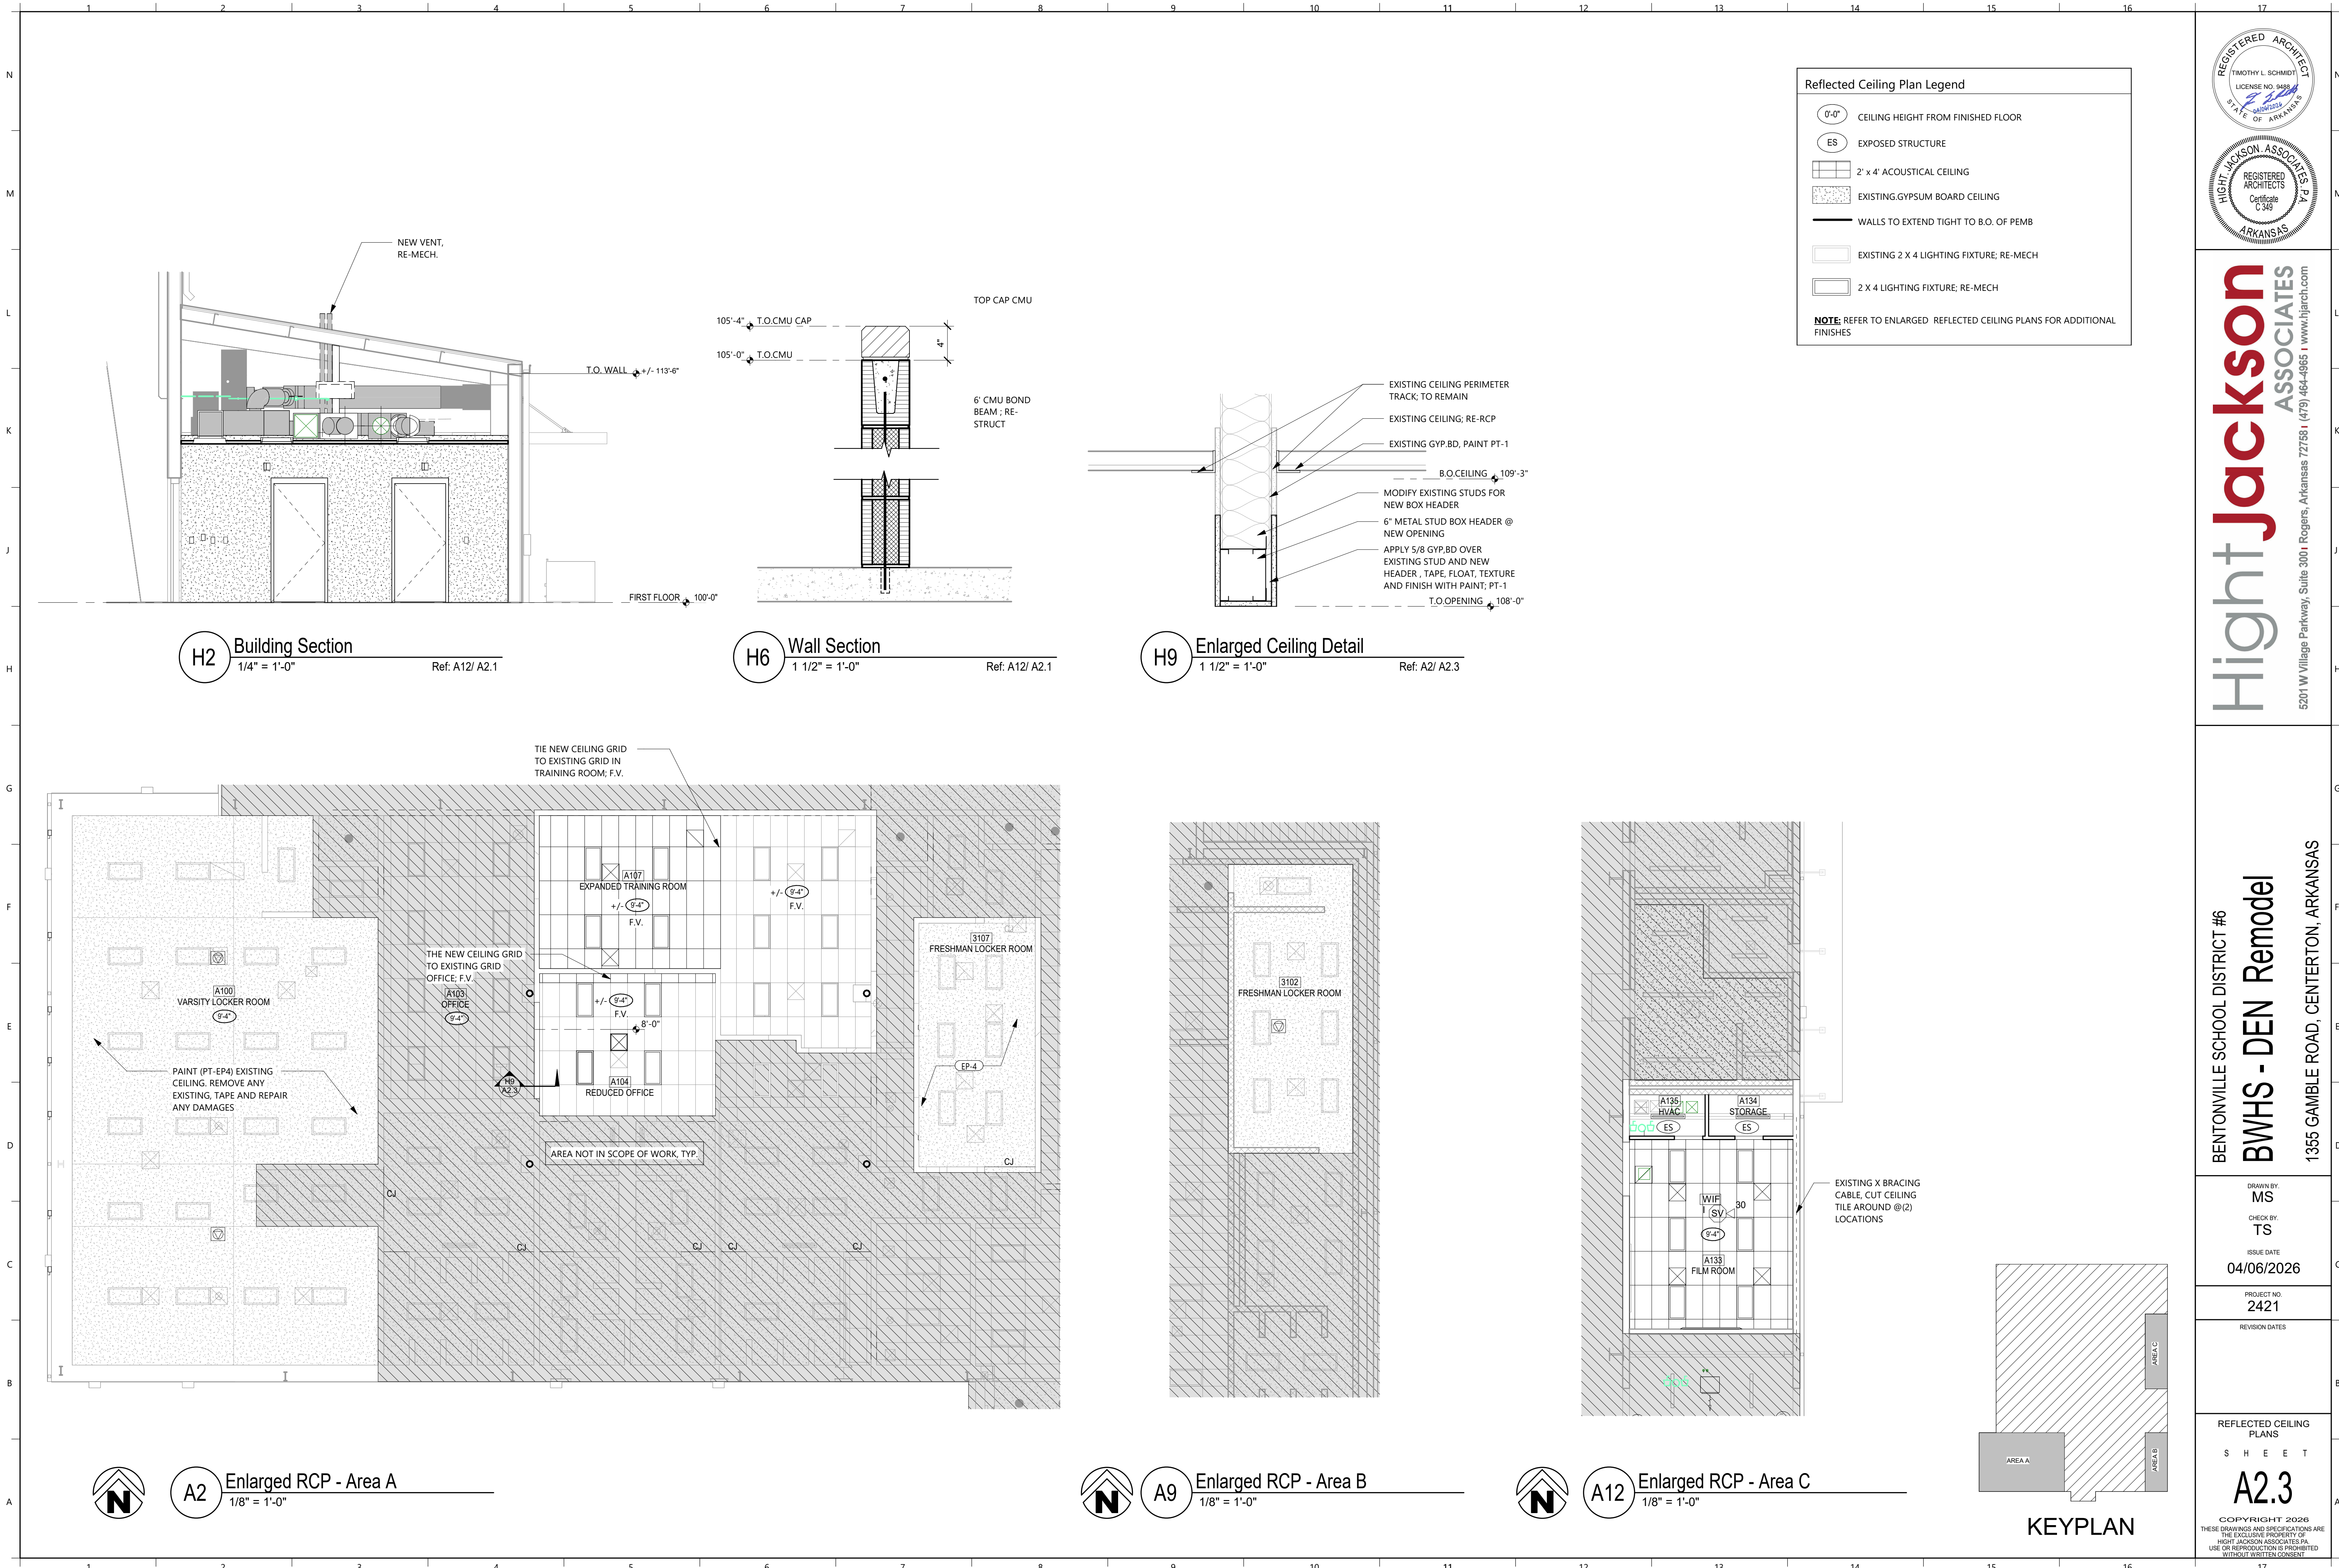


Hight Jackson ASSOCIATES
5201 W Village Parkway, Suite 300 | Rogers, Arkansas 72781 | (479) 464-4965 | www.hjarch.com

BENTONVILLE SCHOOL DISTRICT #6
BWHS - DEN Remodel
1355 GAMBLE ROAD, CENTER TON, ARKANSAS


DRAWN BY: MS
CHECK BY: TS
ISSUE DATE: 04/06/2026
PROJECT NO: 2421
REVISION DATES:
REFLECTED CEILING PLANS
SHEET
A2.3
COPYRIGHT 2026
THESE DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF HIGHT JACKSON ASSOCIATES P.A. USE OR REPRODUCTION IS PROHIBITED WITHOUT WRITTEN CONSENT

Door Frame Types

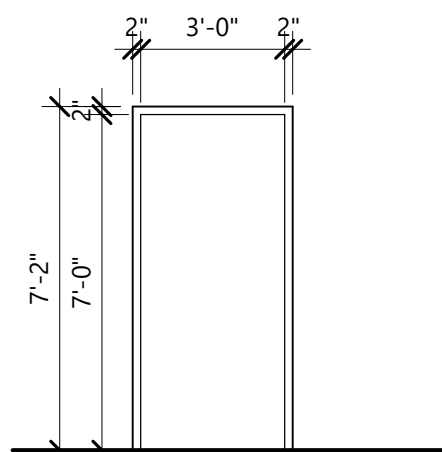


Frame Type 1
HOLLOW METAL FRAME PAINTED

Door Types

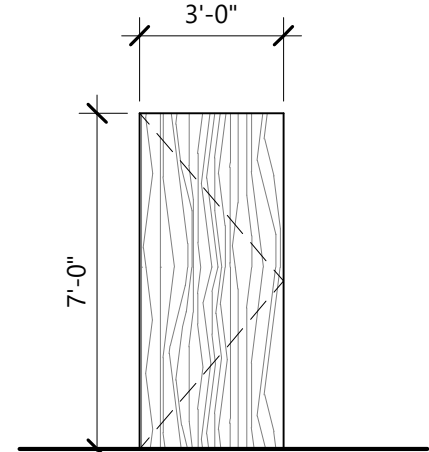

Door Type A
FLUSH WOOD DOOR, SOLID
CORE, STAINED
TO MATCH EXISTING

Window Frame Types

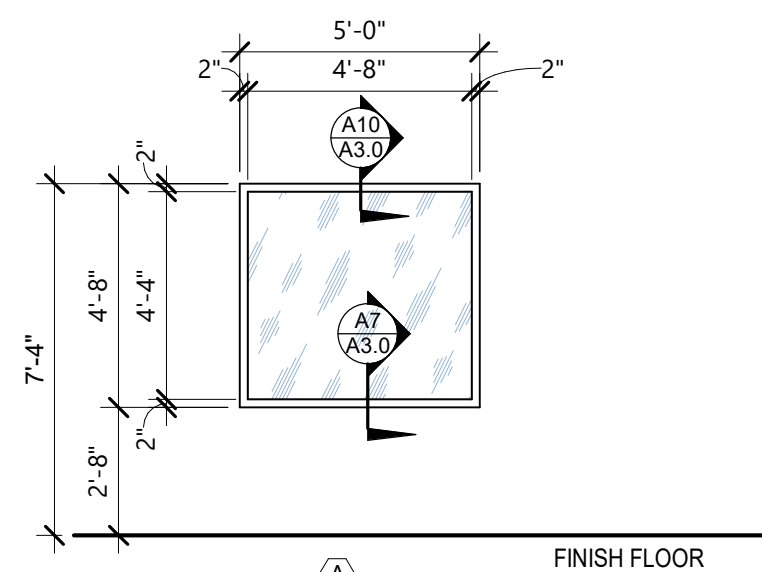

(A)
HOLLOW METAL FRAME
PAINTED WITH 1/4" CLEAR
GLASS


MARK	DETAILS			NOTES
	HEAD	JAMB	SILL	
A104	G7/A3.0	C7/A3.0		ADD ACCESS CONTROL TO HARDWARE SET
A127B				
A127C				ADD ACCESS CONTROL TO HARDWARE SET
A129A	G13/A3.0	C3/A3.0	A13/A3.0	
A131A	G13/A3.0	C13/A3.0	A13/A3.0	
A134	G10/A3.0	C10/A3.0		
A135	G10/A3.0	C10/A3.0		

Keyed General Notes

1. DOOR TO BE CONTROLLED BY ACCESS CONTROL SYSTEM. COORDINATE LOCATION AND INSTALLATION OF JUNCTION BOXES AND CONDUIT WITH THE ELECTRICIAN AND ACCESS CONTROL CONTRACTOR. CONDUIT MUST BE ROUTED FROM ACCESSIBLE POINT ABOVE CEILING TO FRAME JAMB AT WIRE TRANSFER DEVICE LOCATION. REFER TO SPECIFICATION SECTION 08 43 13 ALUMINUM STOREFRONT, DOORS, AND EXTERIOR FIXED UNITS AND SECTION 08 71 00 FINISH DOOR HARDWARE FOR ACCESS CONTROL HARDWARE TO BE PROVIDED AND INSTALLED. REFER TO SPECIFICATION SECTION 28 13 01 AND ELECTRICAL DRAWINGS FOR ACCESS CONTROL SYSTEM COMPONENTS, JUNCTION BOXES, AND CONDUIT. WHERE DOOR IS DOUBLE DOOR, RIGHT DOOR LEAF ONLY TO BE CONTROLLED BY ACCESS CONTROL SYSTEM.

Door General Notes


1. PROVIDE BLOCKING IN GYPSUM BOARD AND STUD WALLS TO ATTACH AND SUPPORT ALL WALL MOUNTED HARDWARE.
2. PROVIDE REINFORCING IN HOLLOW METAL AND FRAMES AS REQUIRED TO PROPERLY SECURE HARDWARE. RE--SPECS.
3. PROVIDE SILENCERS FOR ALL HOLLOW METAL DOOR FRAMES UNLESS WEATHER-STRIPPING IS PROVIDED.
4. ANCHOR RECEIVING END OF RECESSED FLUSH BOLT AND SURFACE MOUNTED BOLTS IN EPOXY CONCRETE AT CONCRETE FLOOR.
5. REFER TO DOOR TAGS AND 08 71 00 FOR HARDWARE SETS.
6. DOOR LEAVES ARE STANDARD 3'-0" WIDE, 7'-0" HIGH. REFER TO FLOOR PLAN DIMENSION AND NOTES ON DOOR SCHEDULE FOR EXCEPTIONS.
7. DETAILS DO NOT INDICATE DOOR SWING. REFER TO ARCHITECTURAL FLOOR PLANS FOR DOOR SWING.
8. CONTRACTOR IS RESPONSIBLE FOR VERIFICATION AND COORDINATION OF FRAME THROAT DEPTHS WITH WALL THICKNESS PRIOR TO ORDERING.
9. WHERE FLOOR MOUNTED STOPS AND OVERHEAD STOPS ARE USED ON SAME DOOR ALIGN STOPS SO THAT DOOR DOES NOT TWIST WHEN HELD AGAINST STOPS.
10. COORDINATE MOUNTING HEIGHTS OF LATCHES, EXIT DEVICES, AND OTHER HARDWARE ITEMS WITH DOOR LITE DIMENSIONS.
11. CONTINUOUS HINGES ONLY ON ALL EXTERIOR DOORS.
12. ALL DOORS UP TO 3' WIDE LEAFS TO HAVE 1 1/2 PAIR OF HINGES EACH LEAF, UNLESS NOTED OTHERWISE. (DOORS 3'-6" AND WIDER TO HAVE 2 PAIRS OF HINGES UNLESS NOTED OTHERWISE)
13. PROVIDE DRIP CAP AT EXTERIOR DOORS WITHOUT CANOPY COVER.
14. PROVIDE GALVANIZED HOLLOW METAL DOORS AT EXTERIOR LOCATIONS.
15. ALL CLOSERS TO HAVE PARALLEL ARMS, UNLESS NOTED OTHERWISE OR INSTALLATION REQUIRES ALTERNATE ARM TYPE.
16. PROVIDE FIRE GASKET AROUND PERIMETER OF ALL FIRE RATED DOORS IN ACCORDANCE WITH 2006 INTERNATIONAL BUILDING CODE.
17. REFER TO AND VERIFY LINTEL COND. WITH STRUCTURAL LINTEL PLAN.
18. ALL EXTERIOR HOLLOW METAL DOORS TO BE INSULATED.
19. REFER TO SPEC. SECTION 01 21 13 FOR HARDWARE ALLOWANCE.
20. UNLESS OTHERWISE NOTED, ALL INTERIOR DOORS TO HAVE 1 1/2 PAIR HINGES, EACH LEAF AS SPECIFIED.
21. ALL CLOSERS TO HAVE THROUGH-BOLT ATTACHMENT AT DOOR.
22. PROVIDE REQUIRED FIRE RATING FOR ALL DOORS AND FRAMES LOCATED IN FIRE WALLS.

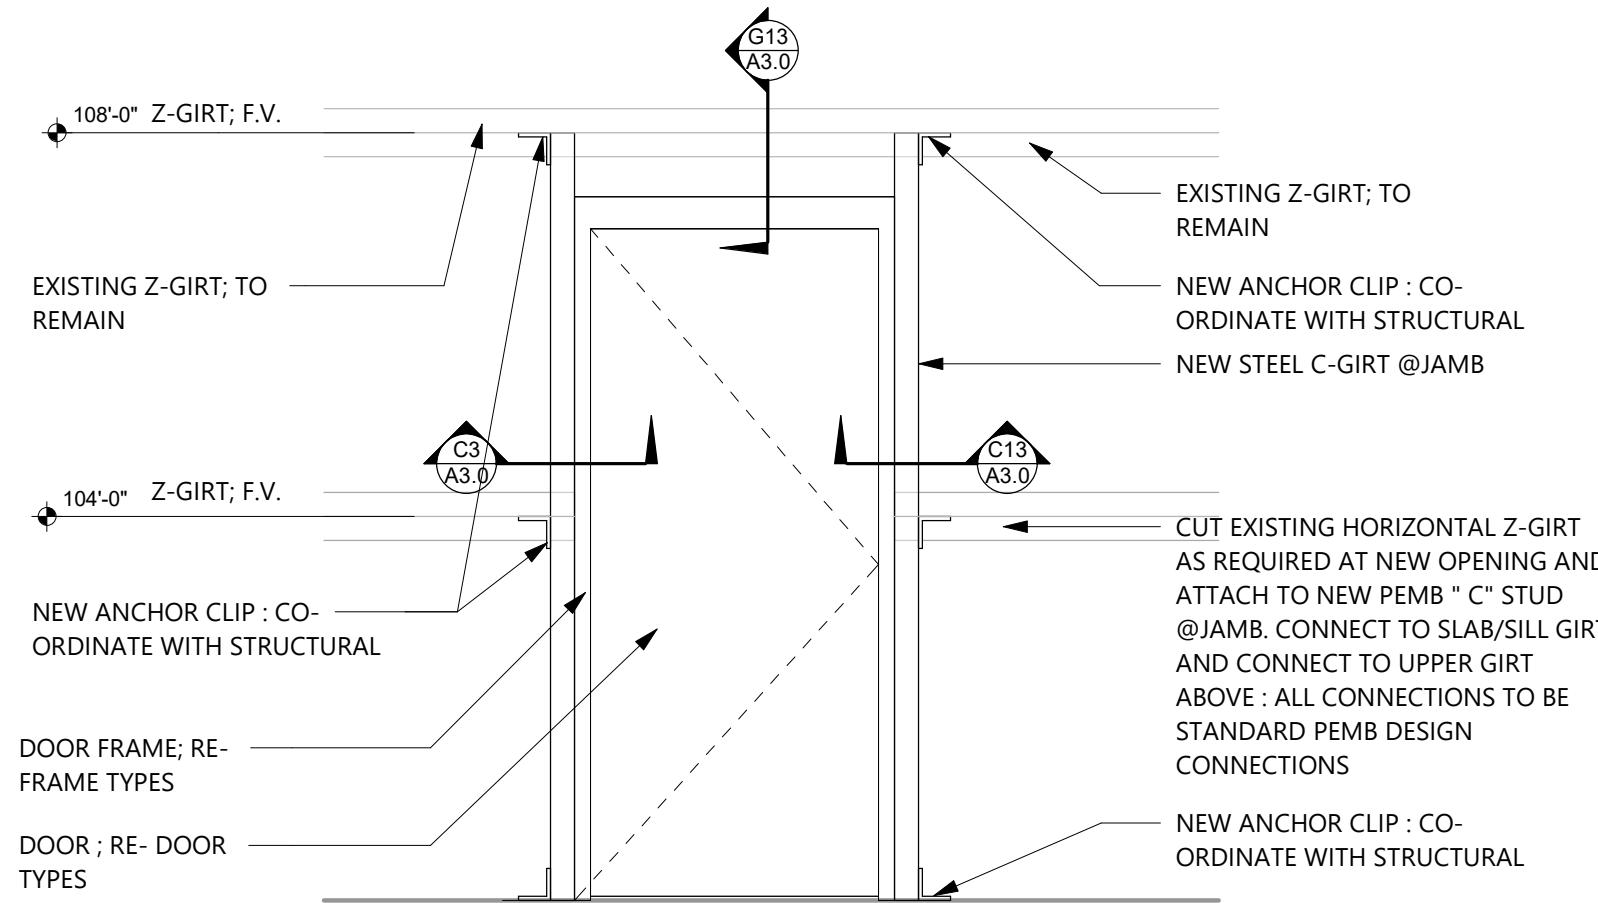

G3 Door Opening Elevation


1/2" = 1'-0"

Ref: A12/ A2.2

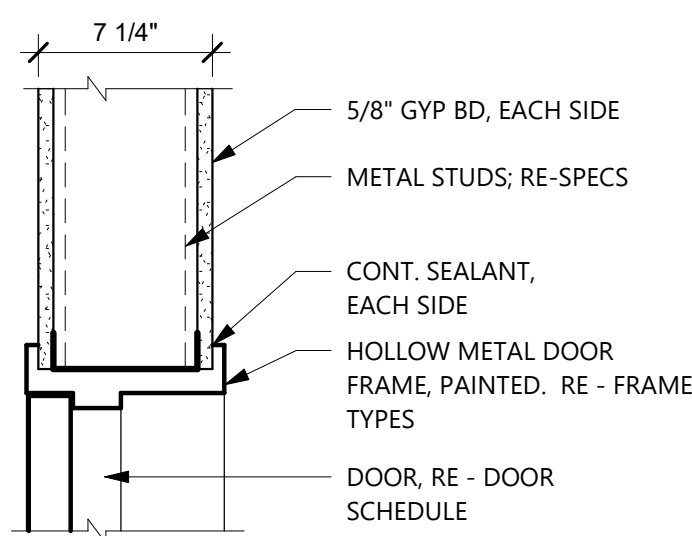


G7 Head Detail

1 1/2" = 1'-0"

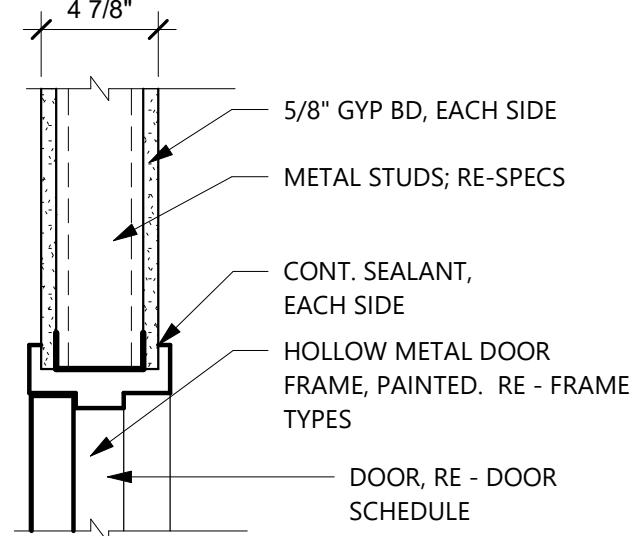

G10 Head Detail


1 1/2" = 1'-0"

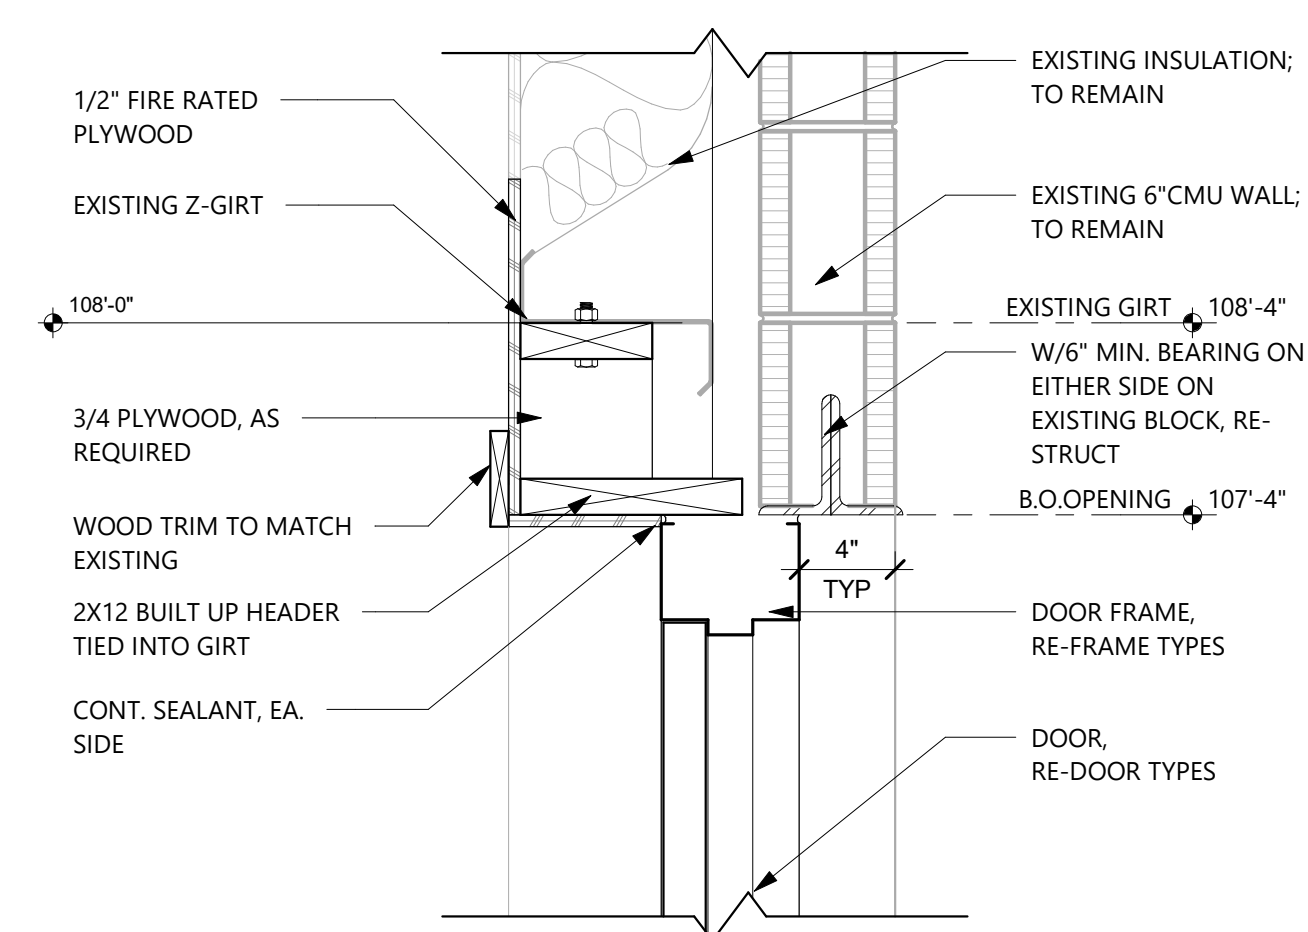

G13 Head Detail

1 1/2" = 1'-0"


Ref: G3/ A3.0

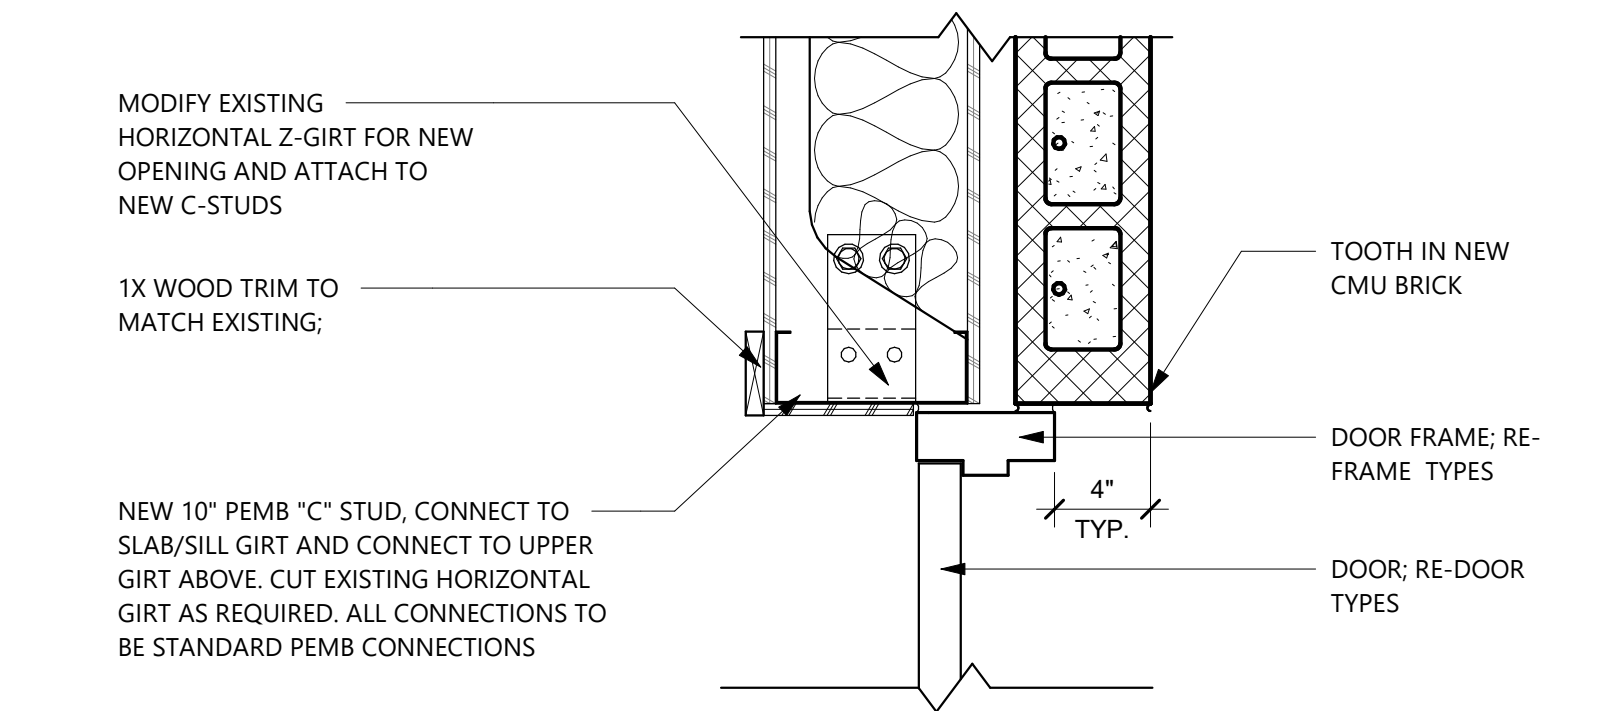

C3 Jamb Detail


1 1/2" = 1'-0"

Ref: A12/ A2.1

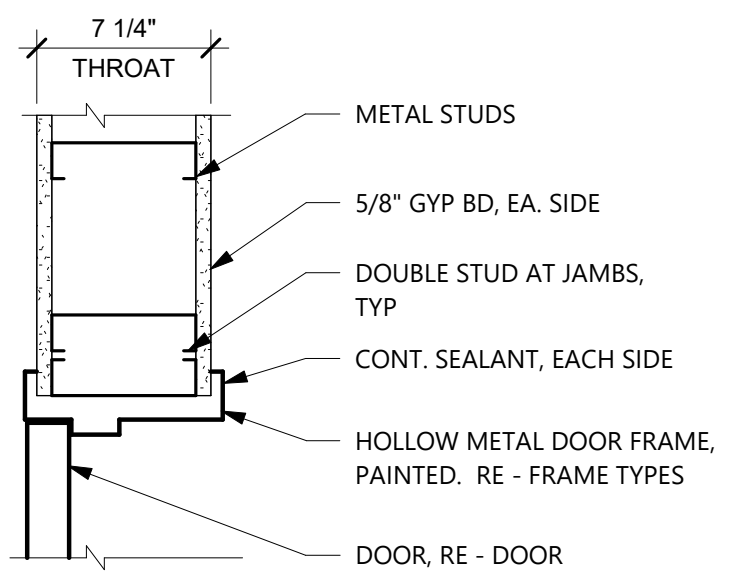


C7 Jamb Detail

1 1/2" = 1'-0"

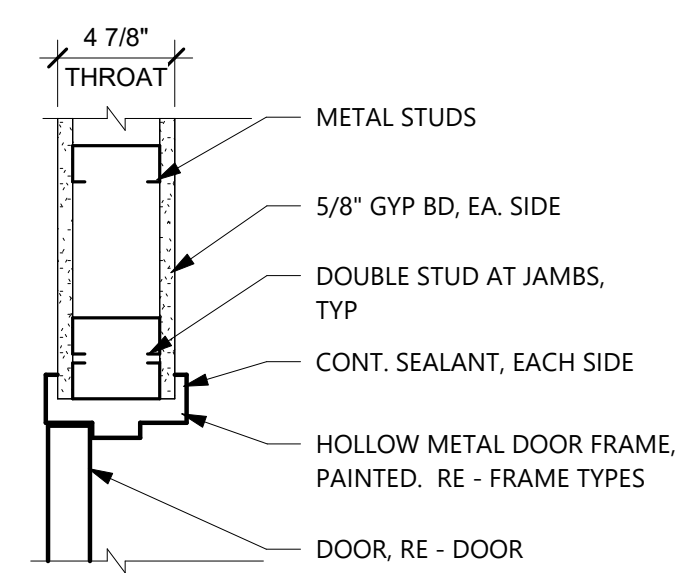

C10 Jamb Detail


1 1/2" = 1'-0"

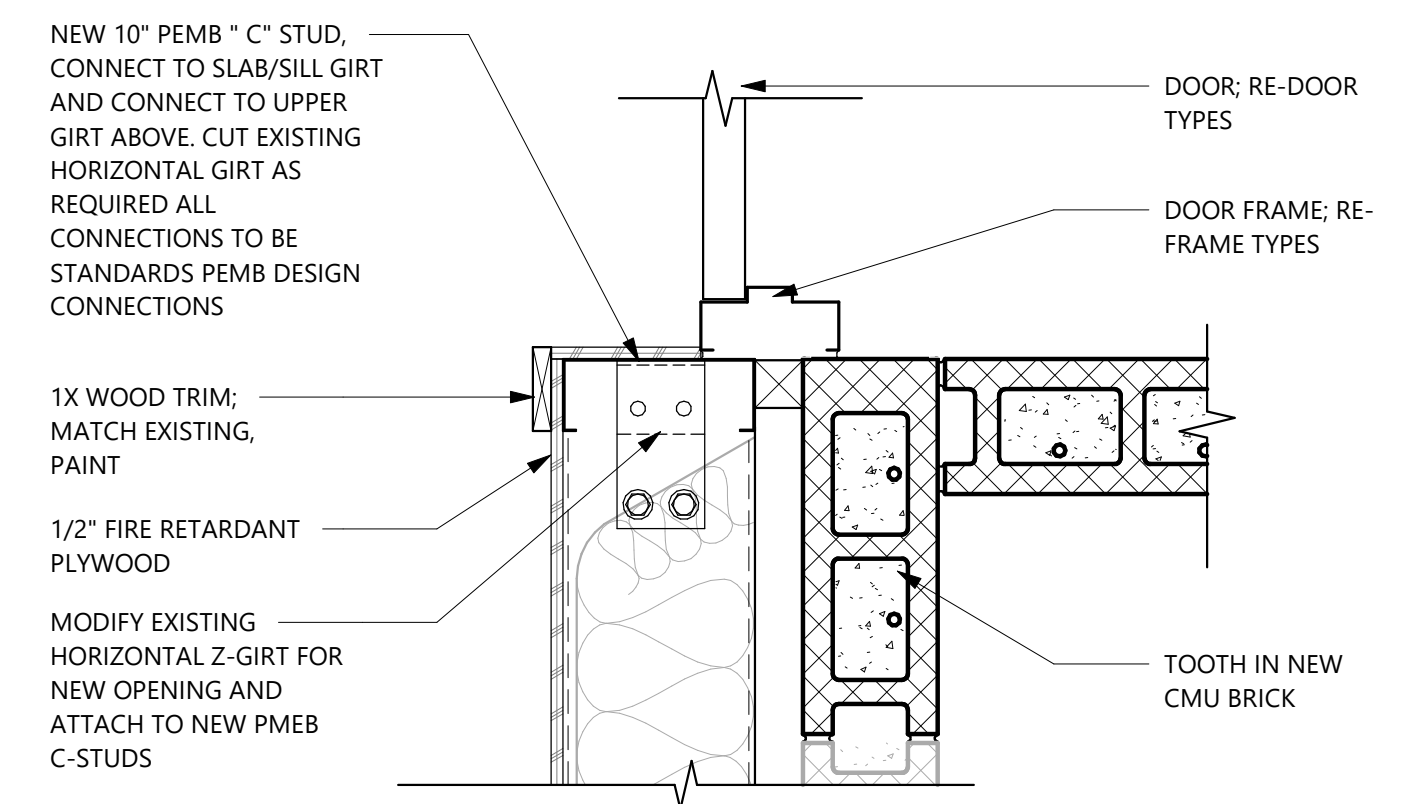

C13 Jamb Detail


1 1/2" = 1'-0"

Ref: A12/ A2.1

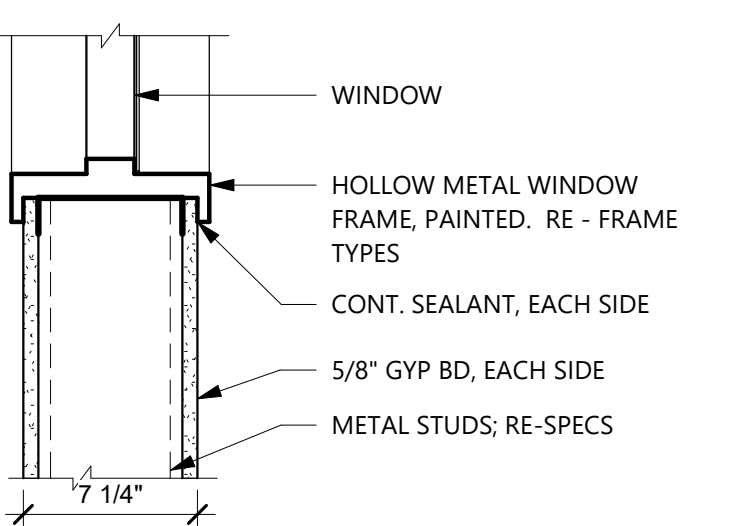


A7 Sill Detail

1 1/2" = 1'-0"

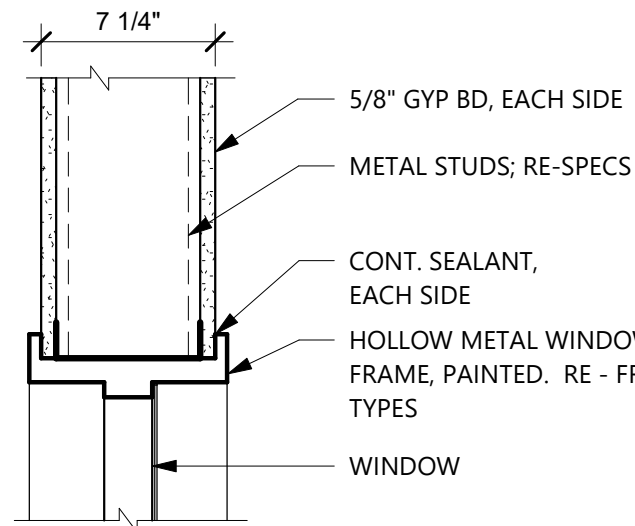

A10 Head Detail

1 1/2" = 1'-0"

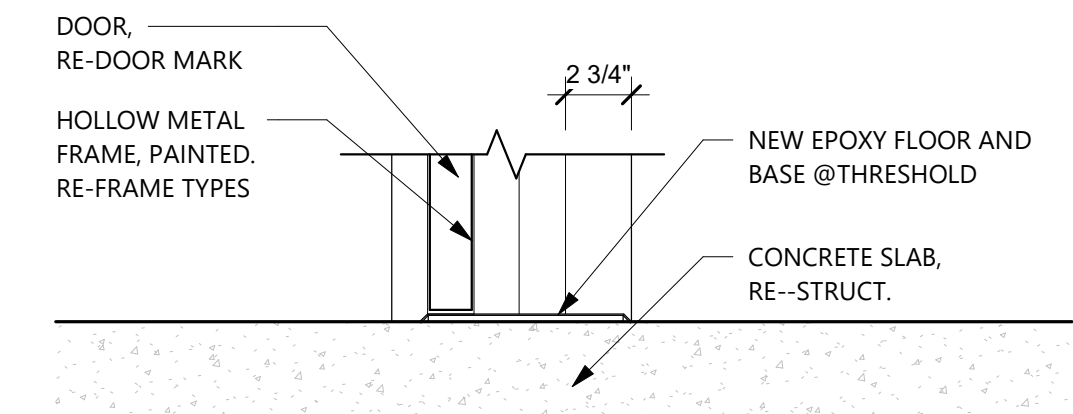

A13 Sill Detail

1 1/2" = 1'-0"



Hight Jackson
ASSOCIATES
5201 W Village Parkway, Suite 301, Rogers, Arkansas 72768 | (479) 464-4965 | www.hjarch.com

BENTONVILLE SCHOOL DISTRICT #6
BWHS - DEN Remodel
1355 GAMBLE ROAD, CENTER TON, ARKANSAS

DRAWN BY:
MS
CHECK BY:
TS

ISSUE DATE
04/06/2026


PROJECT NO.
2421

REVISION DATES


DOOR SCHEDULE / DOOR /
WINDOW / FRAME
ELEVATIONS / DETAILS
S H E E T

A3.0


COPYRIGHT 2026
THESE DRAWINGS AND SPECIFICATIONS ARE
THE EXCLUSIVE PROPERTY OF
HIGHT JACKSON ASSOCIATES P.A.
USE OR REPRODUCTION IS PROHIBITED
WITHOUT WRITTEN CONSENT

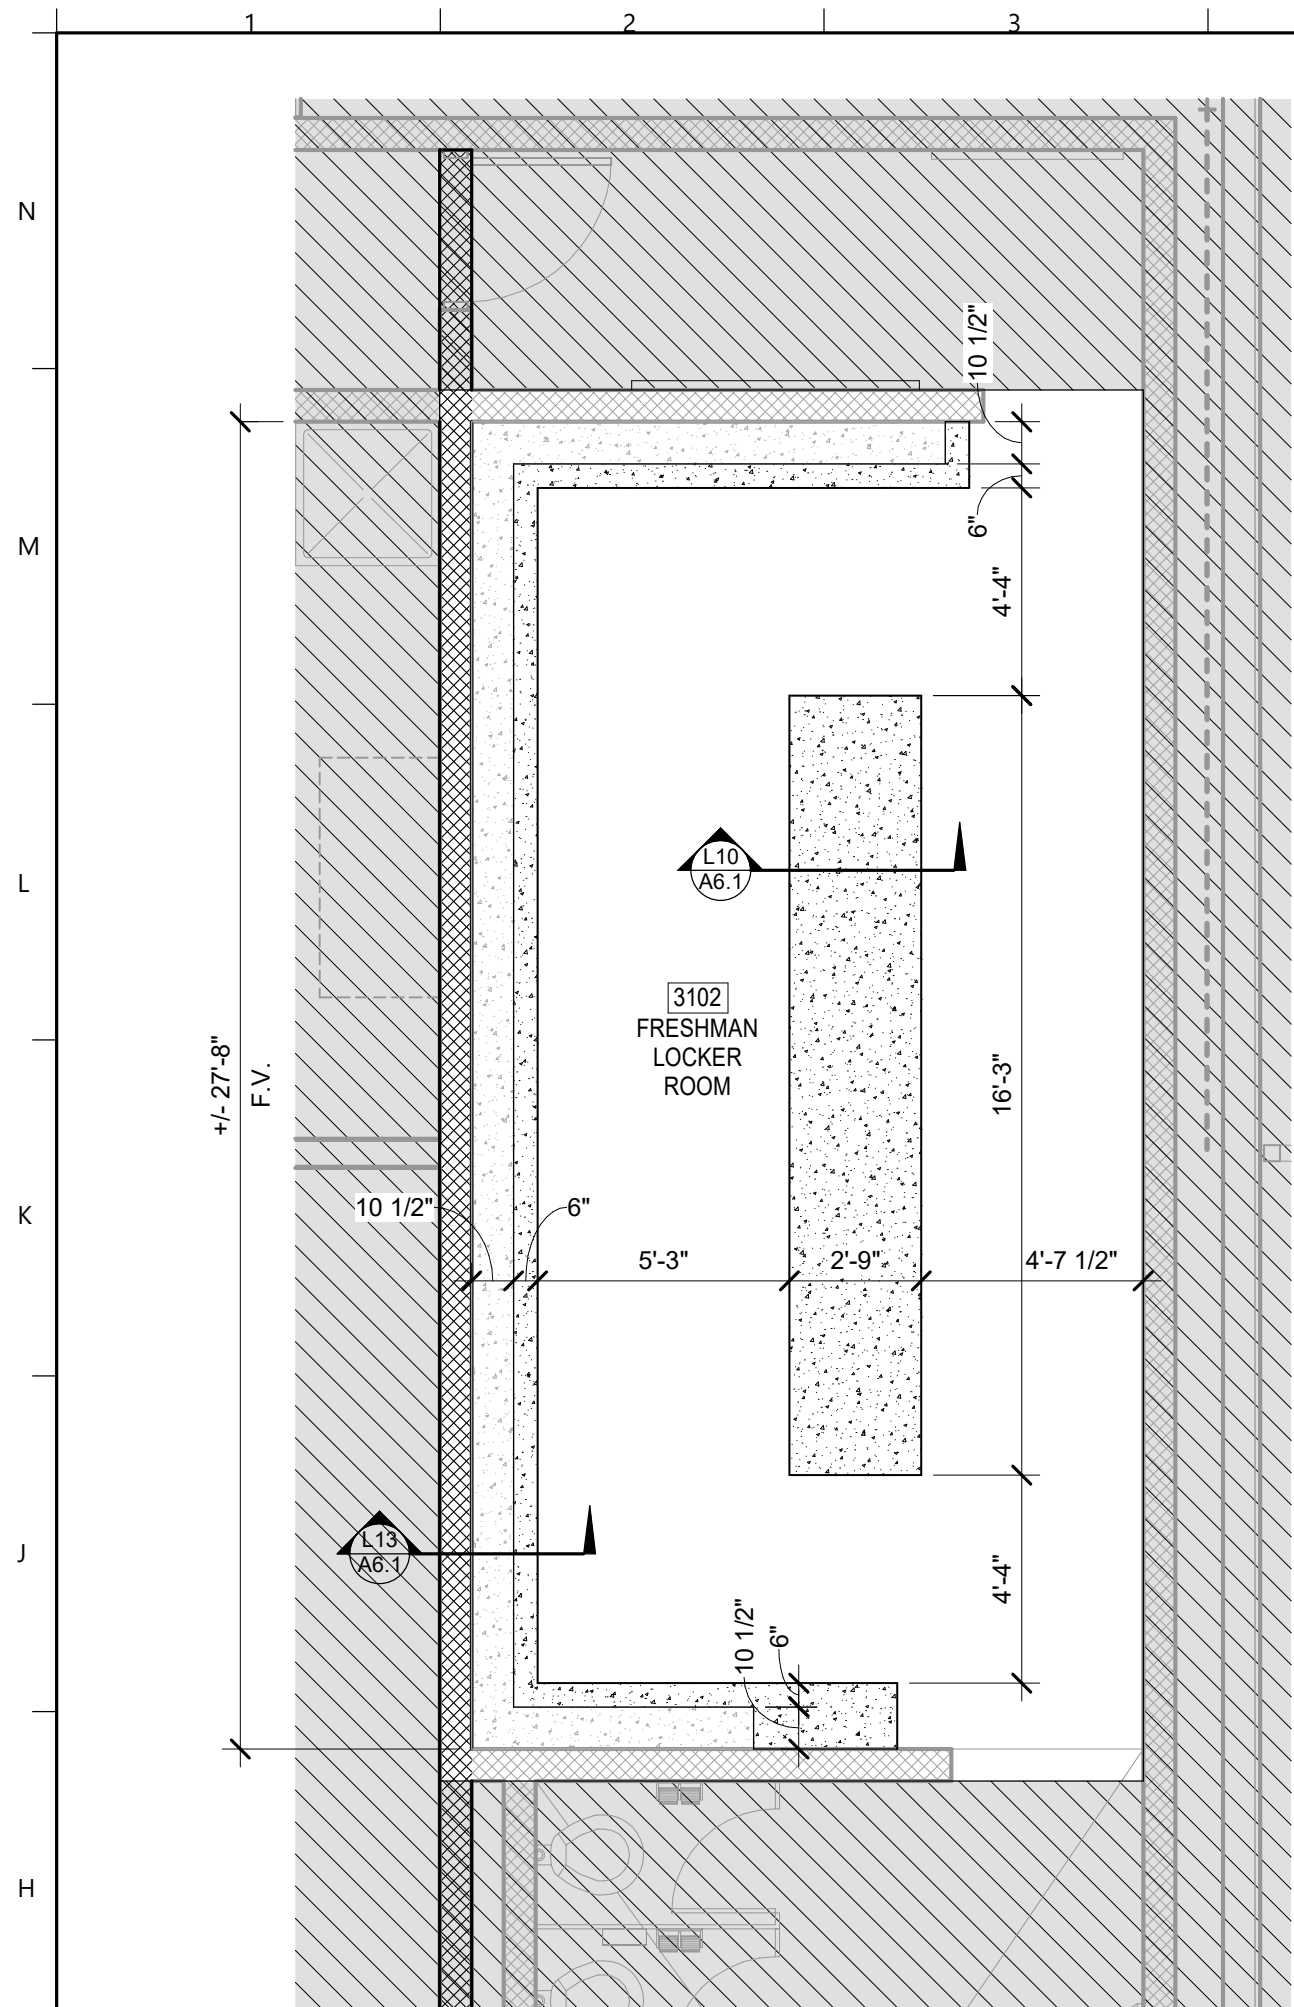


G1 Enlarged Floor Plan - Freshman Locker Room
1/4" = 1'-0" Ref: A9/ A2.1

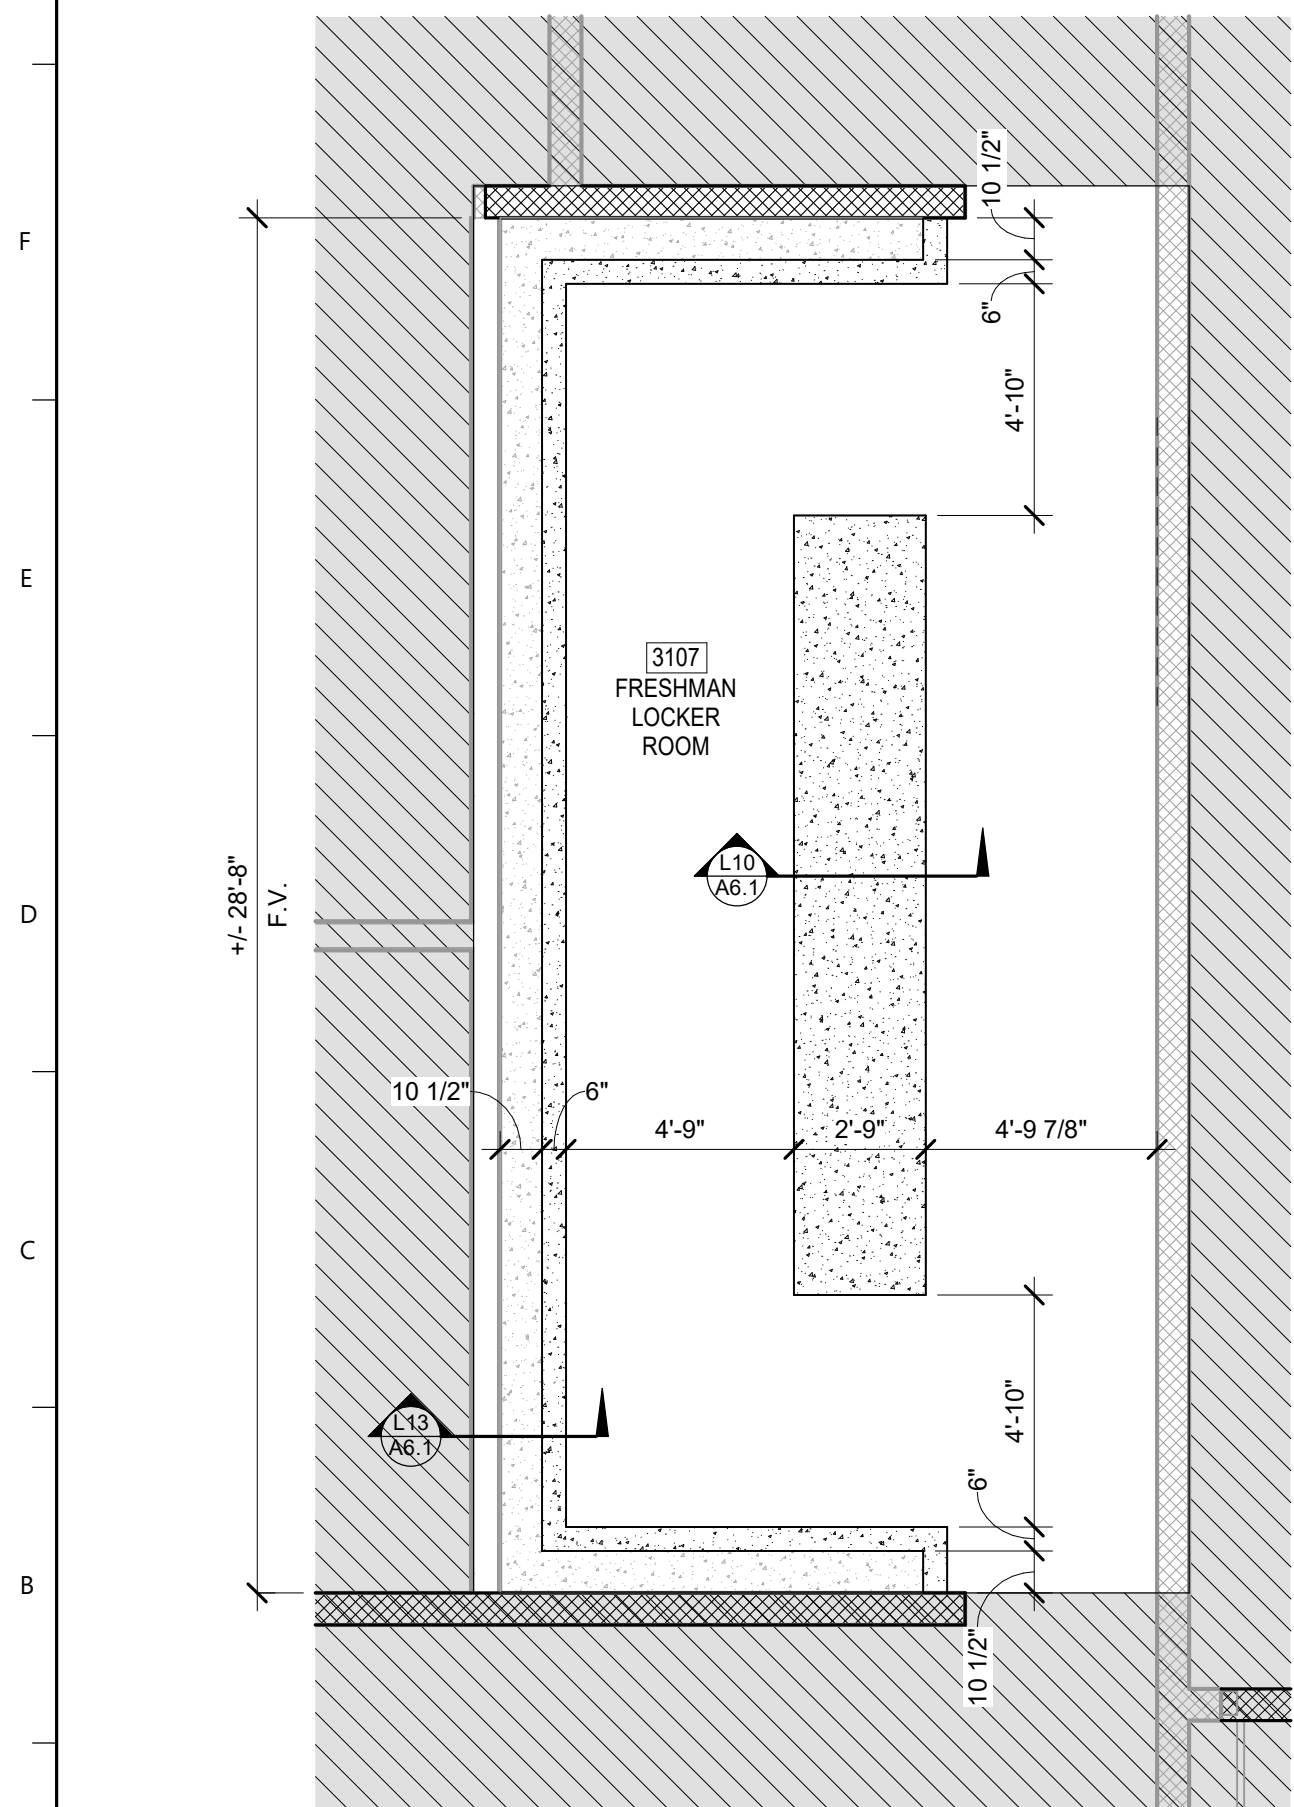

A1 Enlarged Floor Plan - Freshman Locker Room
1/4" = 1'-0" Ref: A2/ A2.1

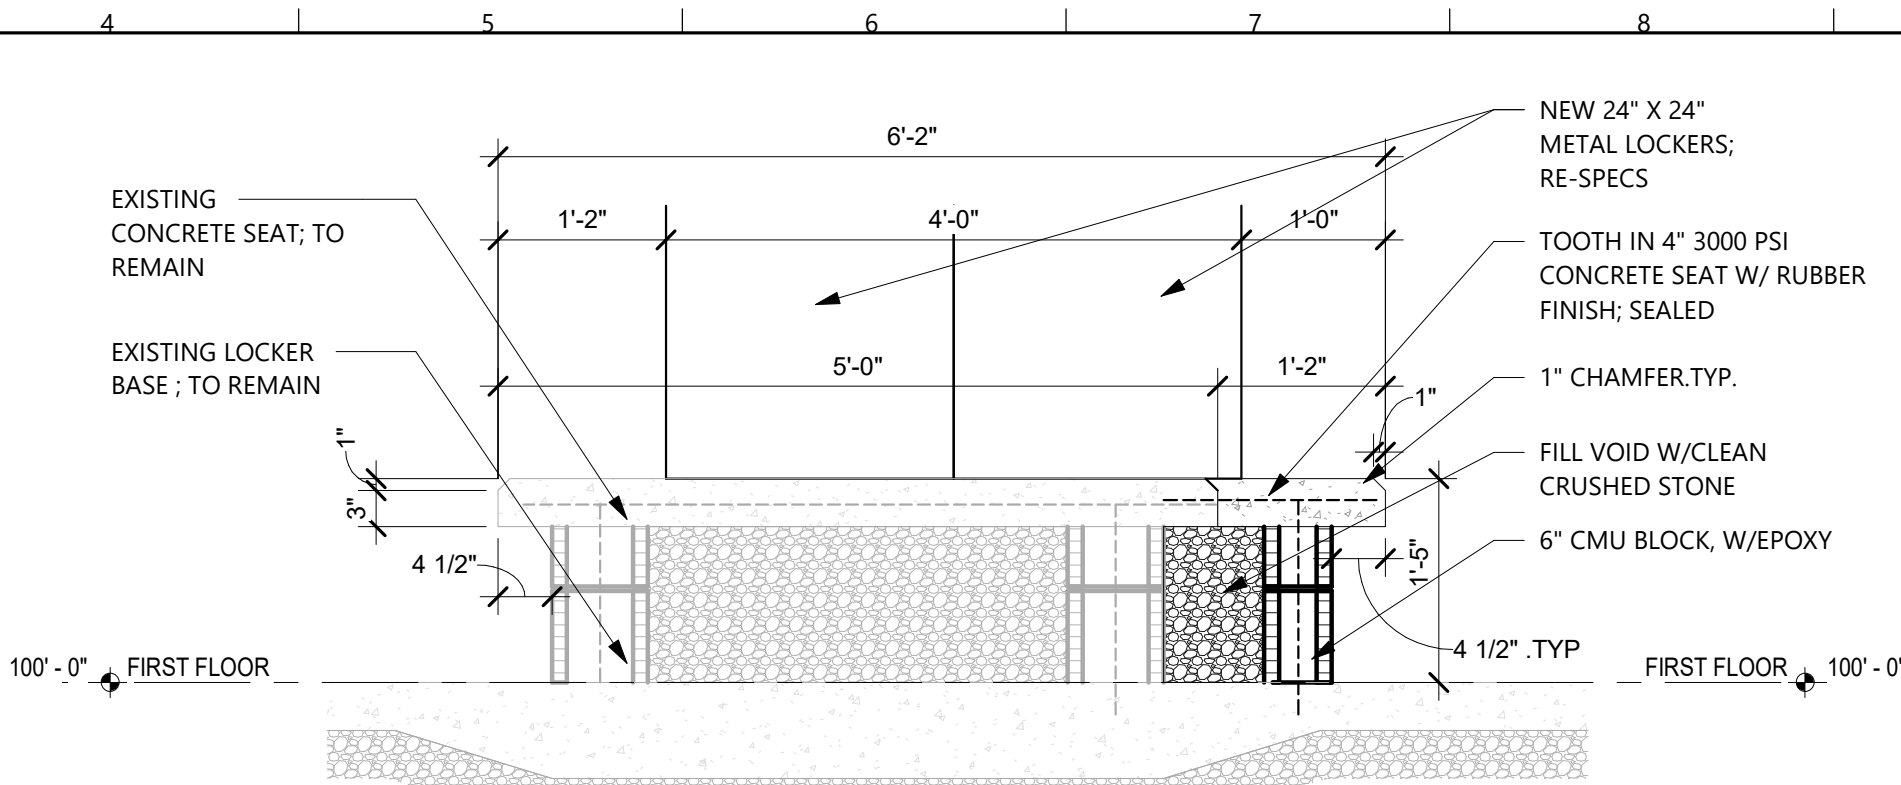


L5 Varsity Locker Base Detail
3/4" = 1'-0" Ref: A5/ A6.1

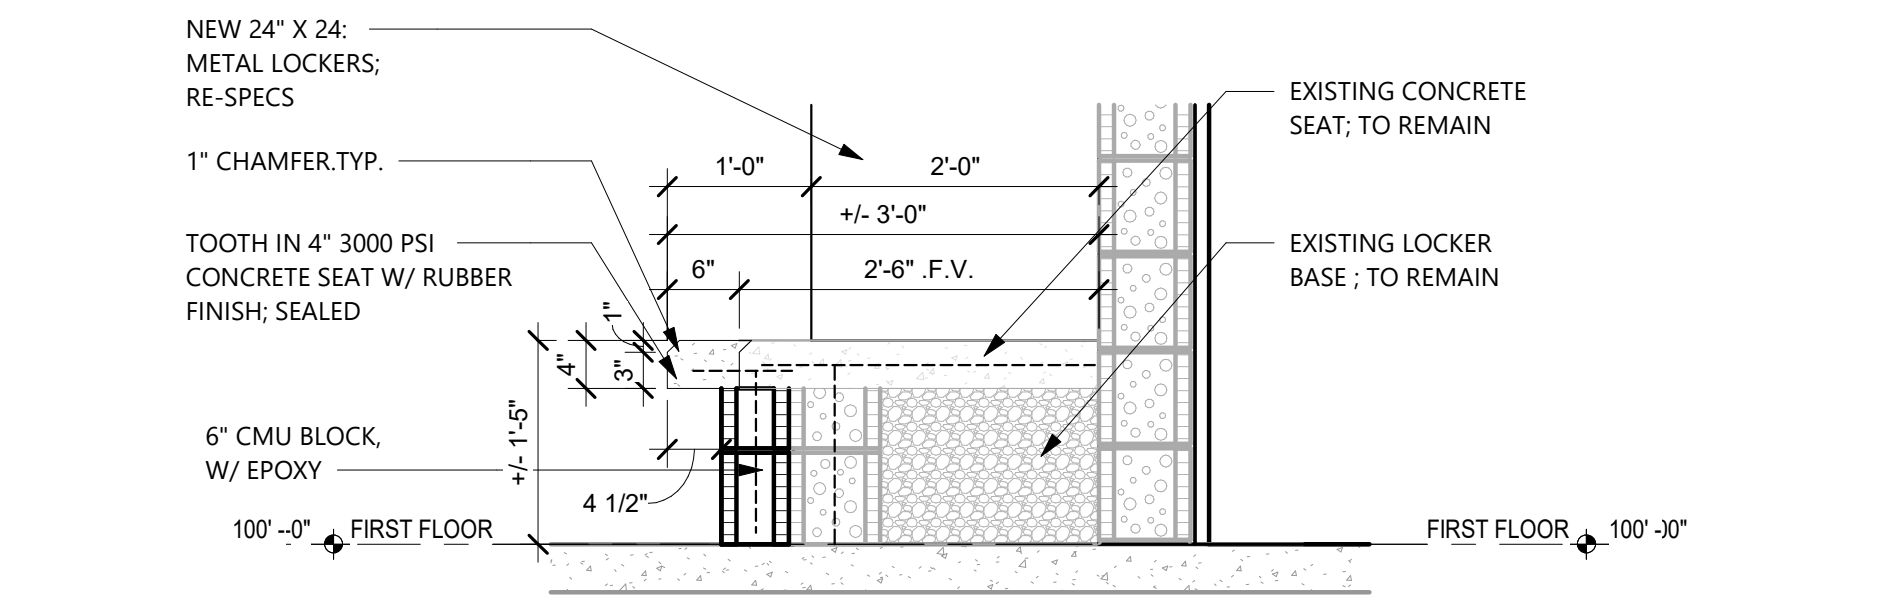


G5 Varsity Locker Base Detail
3/4" = 1'-0" Ref: A5/ A6.1


Locker Bases Legend	
	6" CMU LOCKER BASE WALL
	8" CMU EXISTING LOCKER BASE WALL; TO REMAIN
	CONCRETE SLAB
	EXISTING CONCRETE SLAB

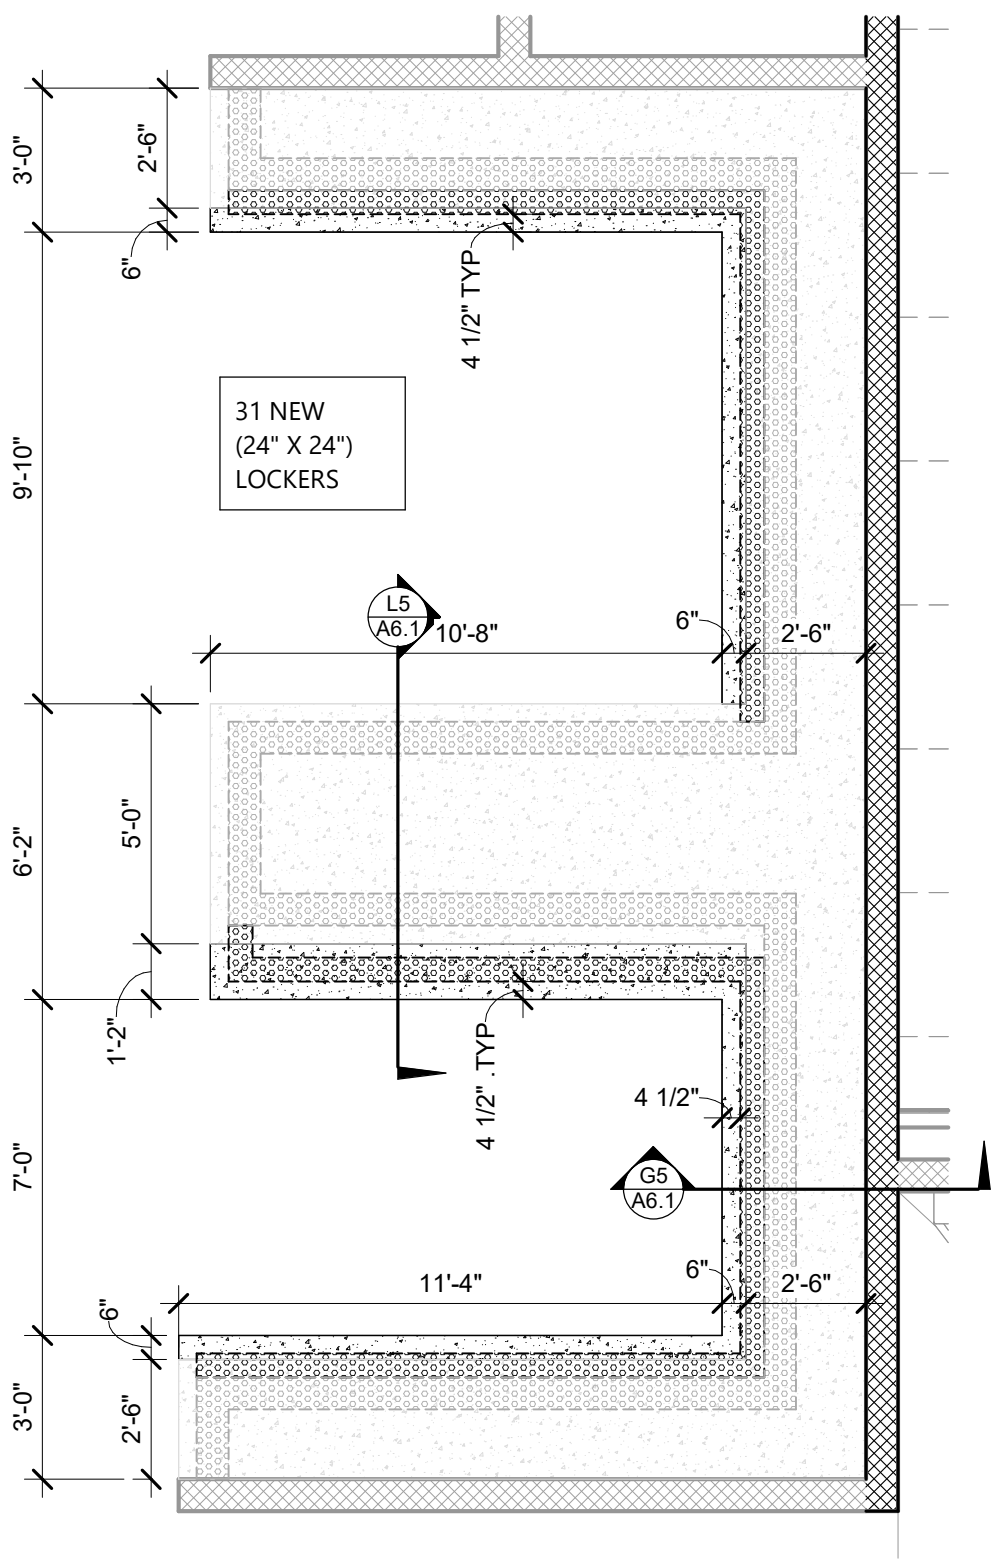


A5 Enlarged Floor Plan - Varsity Locker Room
1/4" = 1'-0"

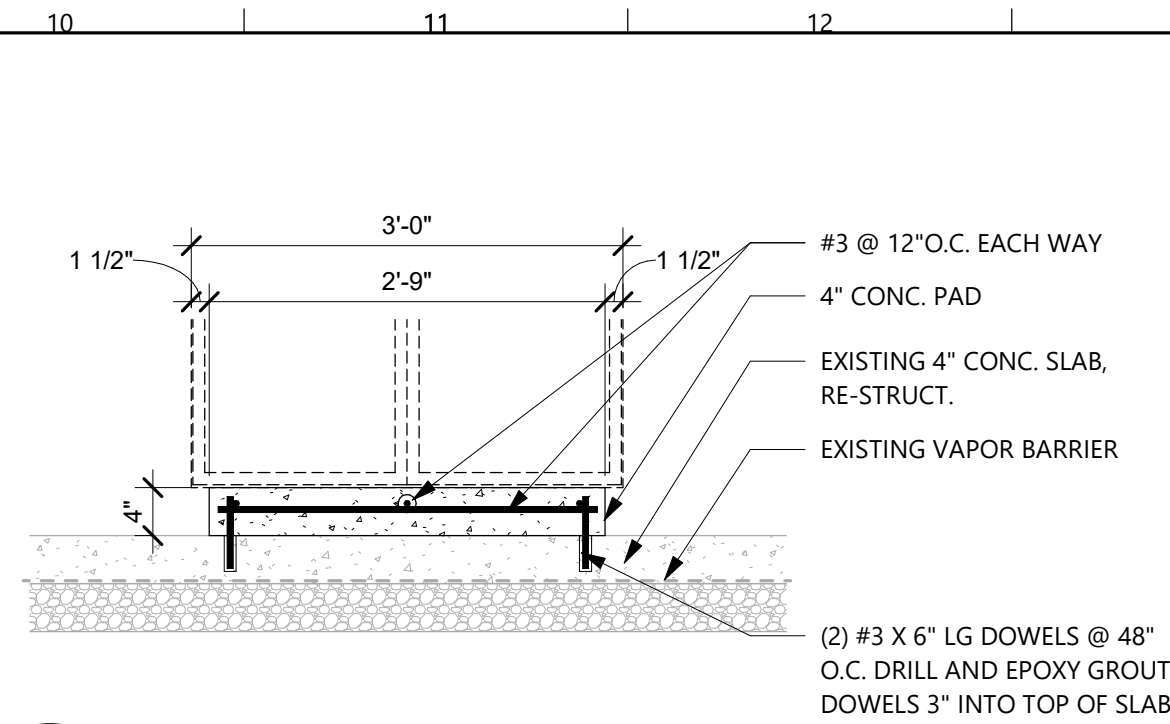


L10 Locker Slab Detail
3/4" = 1'-0" Ref: A1/ A6.1

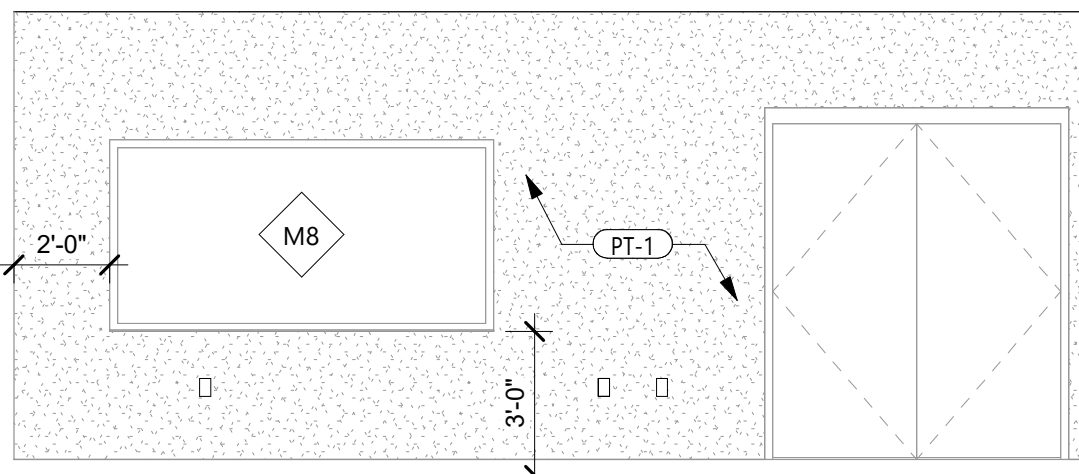


J10 Interior Elevation - Film Room
1/4" = 1'-0" Ref: A12/ A2.2

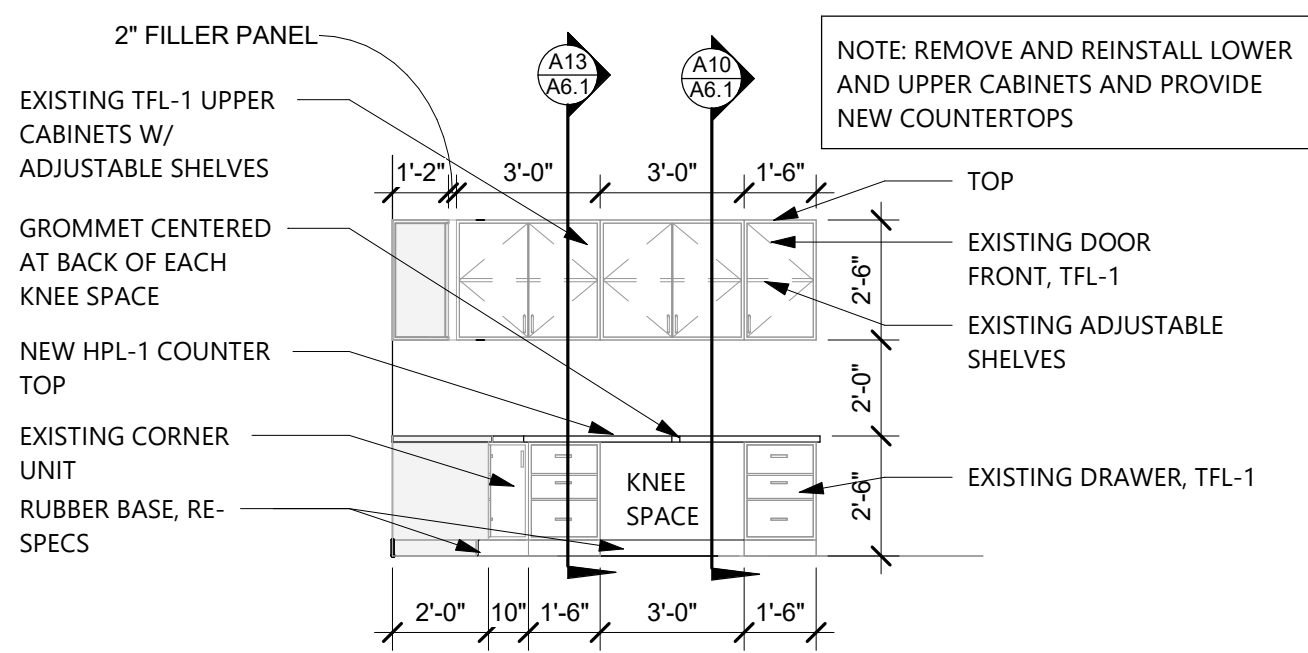


F10 Millwork Elevation
1/4" = 1'-0" Ref: A1/ A2.2

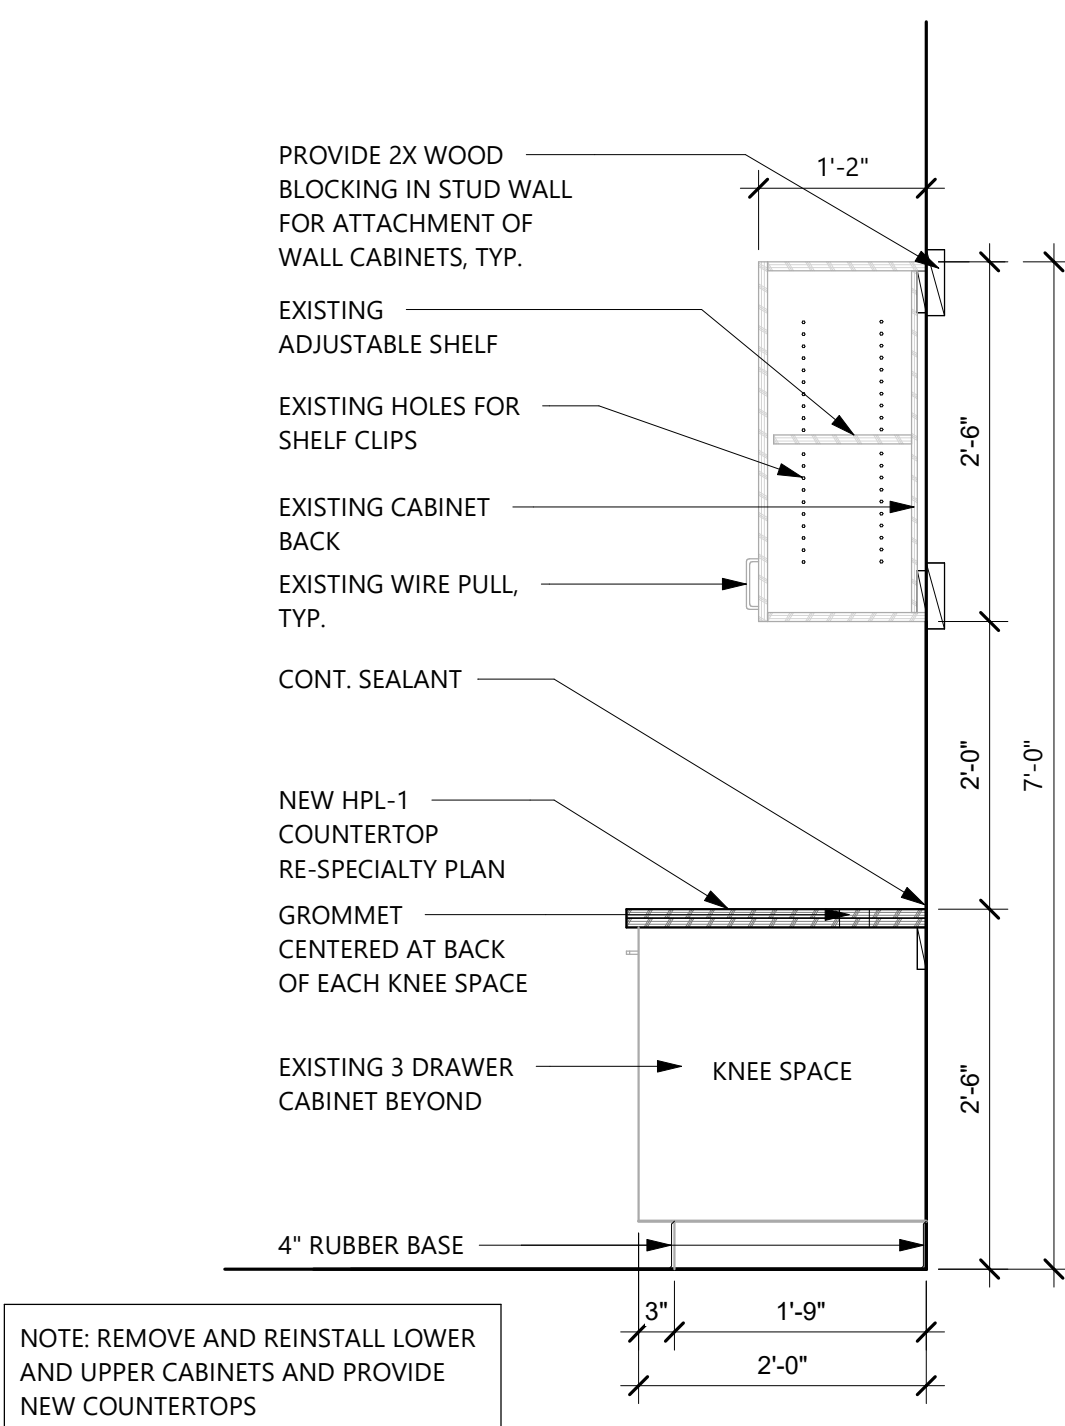


A10 Millwork Section
3/4" = 1'-0" Ref: F10/ A6.1

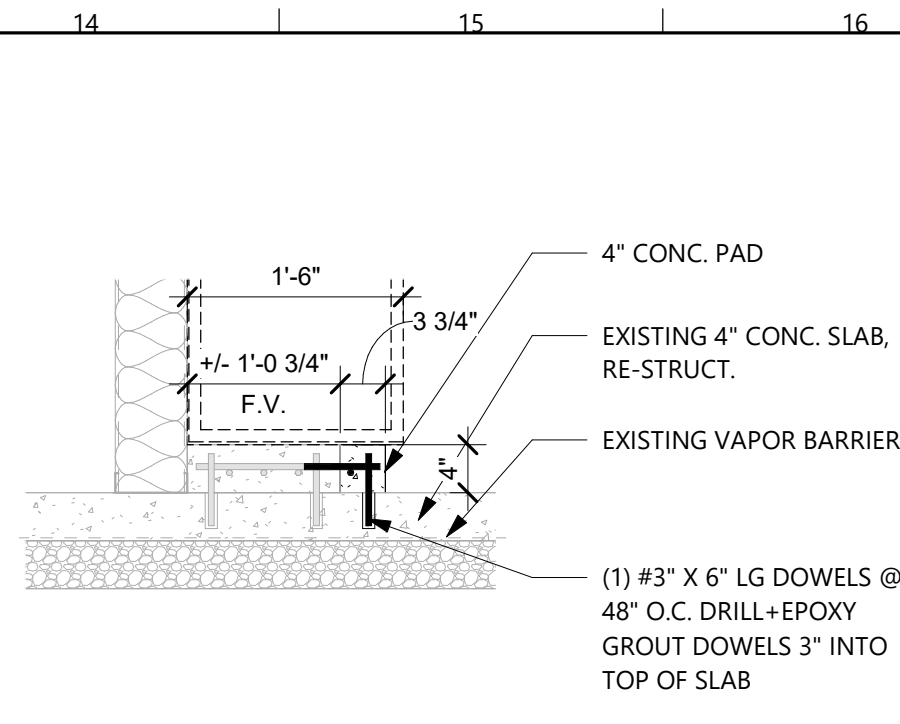


L13 Locker Slab Detail
3/4" = 1'-0" Ref: A1/ A6.1

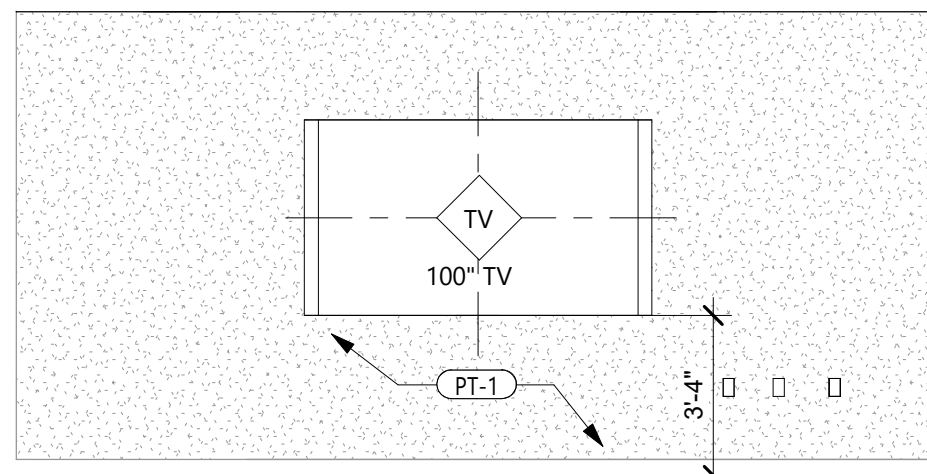

J13 Interior Elevation - Film Room
1/4" = 1'-0" Ref: A12/ A2.2

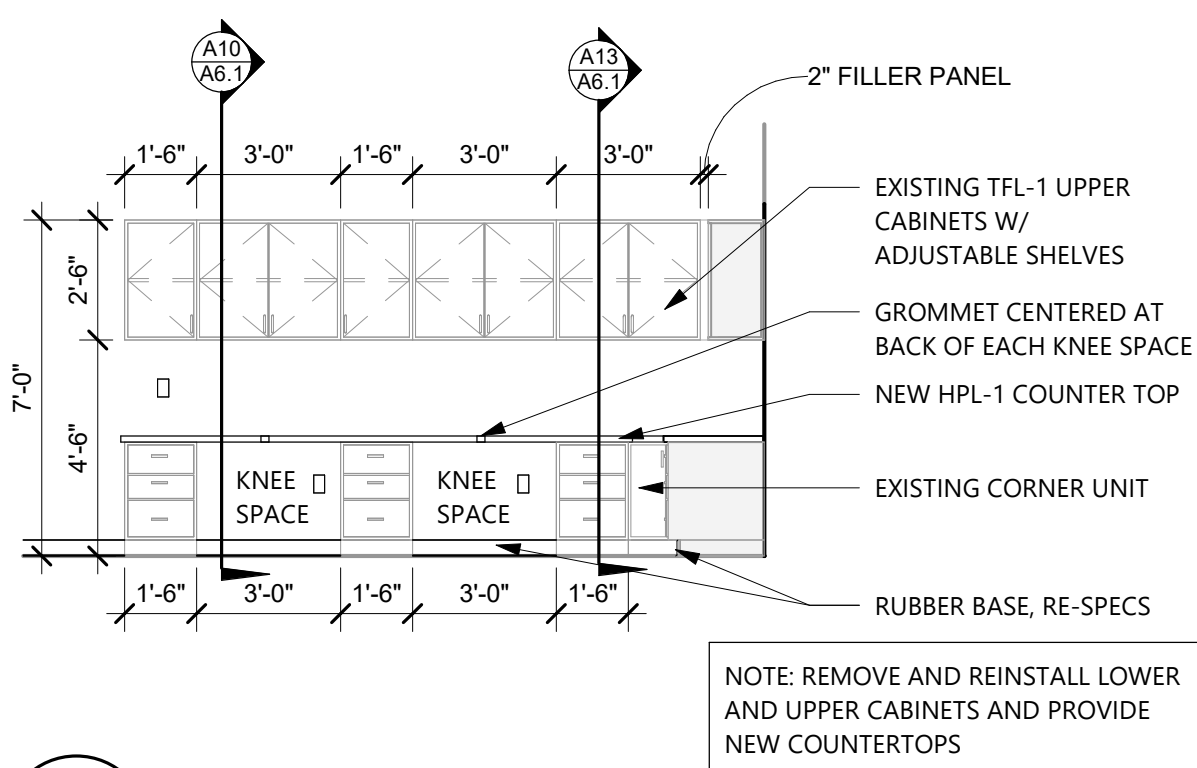

F13 Millwork Elevation
1/4" = 1'-0" Ref: A1/ A2.2

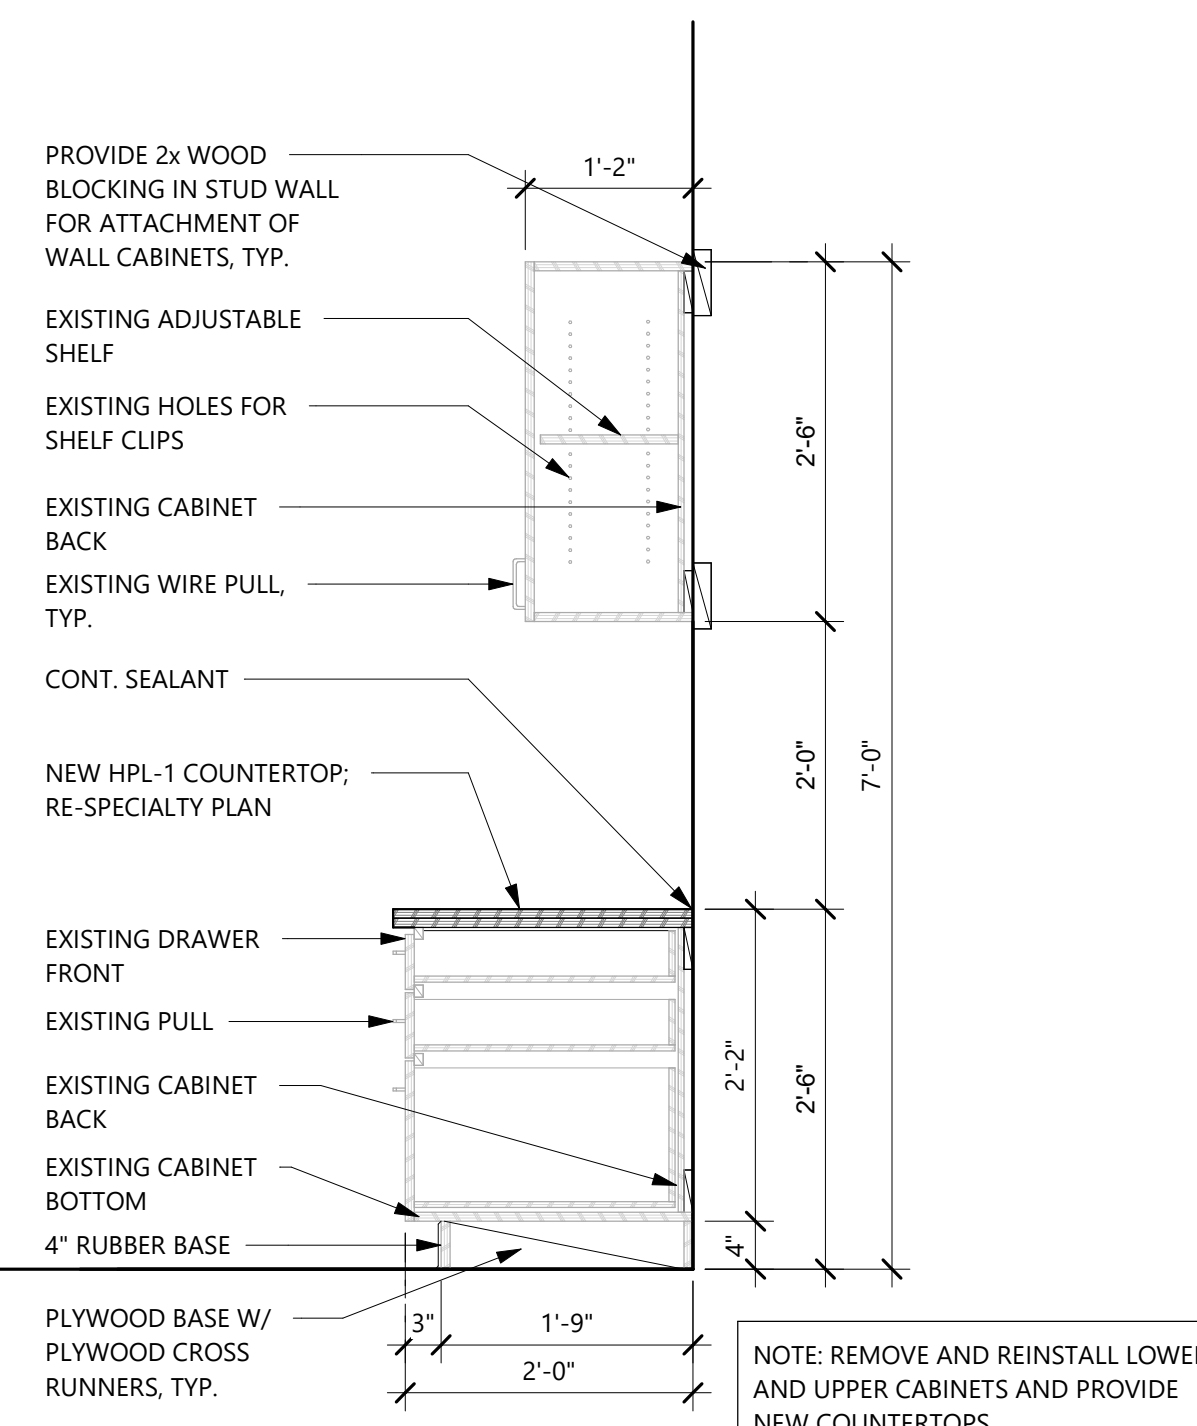

A13 Millwork Section
3/4" = 1'-0" Ref: F10/ A6.1

REGISTERED ARCHITECT
TIMOTHY L. SCHMIDT
LICENSE NO. 9480
STATE OF ARKANSAS

REGISTERED ARCHITECTS
HIGHT JACKSON ASSOCIATES P.A.
OFFICE
C-348
ARKANSAS

Hight Jackson
ASSOCIATES

5201 W Village Parkway, Suite 300 | Rogers, Arkansas 72768 | (479) 464-4965 | www.hjarch.com

BENTONVILLE SCHOOL DISTRICT #6
BWHS - DEN Remodel
1355 GAMBLE ROAD, CENTERTON, ARKANSAS

DRAWN BY:
MS
CHECK BY:
TS
ISSUE DATE:
04/06/2026
PROJECT NO:
2421
REVISION DATES:

MILLWORK ELEVATIONS /
DETAILS/ SLAB DETAILS
S H E E T
A6.1
COPYRIGHT 2026
THESE DRAWINGS AND SPECIFICATIONS ARE
THE EXCLUSIVE PROPERTY OF
HIGHT JACKSON ASSOCIATES P.A.
USE OR REPRODUCTION IS PROHIBITED
WITHOUT WRITTEN CONSENT