

GENERAL NOTES:


- COORDINATE ALL DUCTWORK AND PIPING PENETRATIONS THROUGH BUILDING WALLS AND ROOF WITH THE BUILDING MANUFACTURER. ALL PENETRATIONS SHALL BE IN ACCORDANCE TO MANUFACTURER'S RECOMMENDATIONS.
- ALL EXPOSED SUPPLY DUCTWORK SHALL BE DOUBLE-WALL.

KEYNOTES:

- PROVIDE WITH RETURN AIR TEMP SENSOR IN DUCTWORK.
- DUCT TO BE CENTERED AT 27'-0" AFF.
- DUCT TO BE CENTERED AT 25'-10" AFF.
- DUCT TO BE CENTERED 19'-7" AFF.
- DUCT TO BE CENTERED AT 18'-8" AFF.
- LOCATE FAN AS HIGH AS POSSIBLE. REFER TO MANUFACTURER'S REQUIRED CLEARANCES TO DETERMINE DROP LENGTH.
- PROVIDE EMBOSSED ALUMINUM JACKETING TO PROTECT INSULATION FOR EXTERIOR SHEET METAL DUCTWORK. PRO-R DUCTWORK MAY BE USED IN LIEU OF SHEET METAL DUCTWORK WITH EXTERIOR INSULATION AND JACKETING.
- ROUTE CONDENSATE FROM ROOFTOP UNIT TO GRADE WITH AIR GAP.

PRIGM
ENGINEERING

310 W. DICKSON ST., SUITE 210
FAYETTEVILLE, AR 72701
479.877.3188 | WWW.PRIGM.COM
#25078

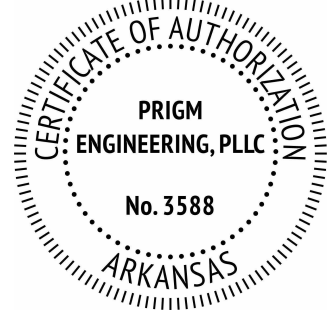

05/08/2026


DEMx
ARCHITECTURE
104 N EAST AVENUE
FAYETTEVILLE, ARKANSAS 72701 | 479.966.4871

© 2025 DEMx ARCHITECTURE

MECHANICAL
ENLARGED PLANS

M3.1

BID SET
05/08/2026 25078

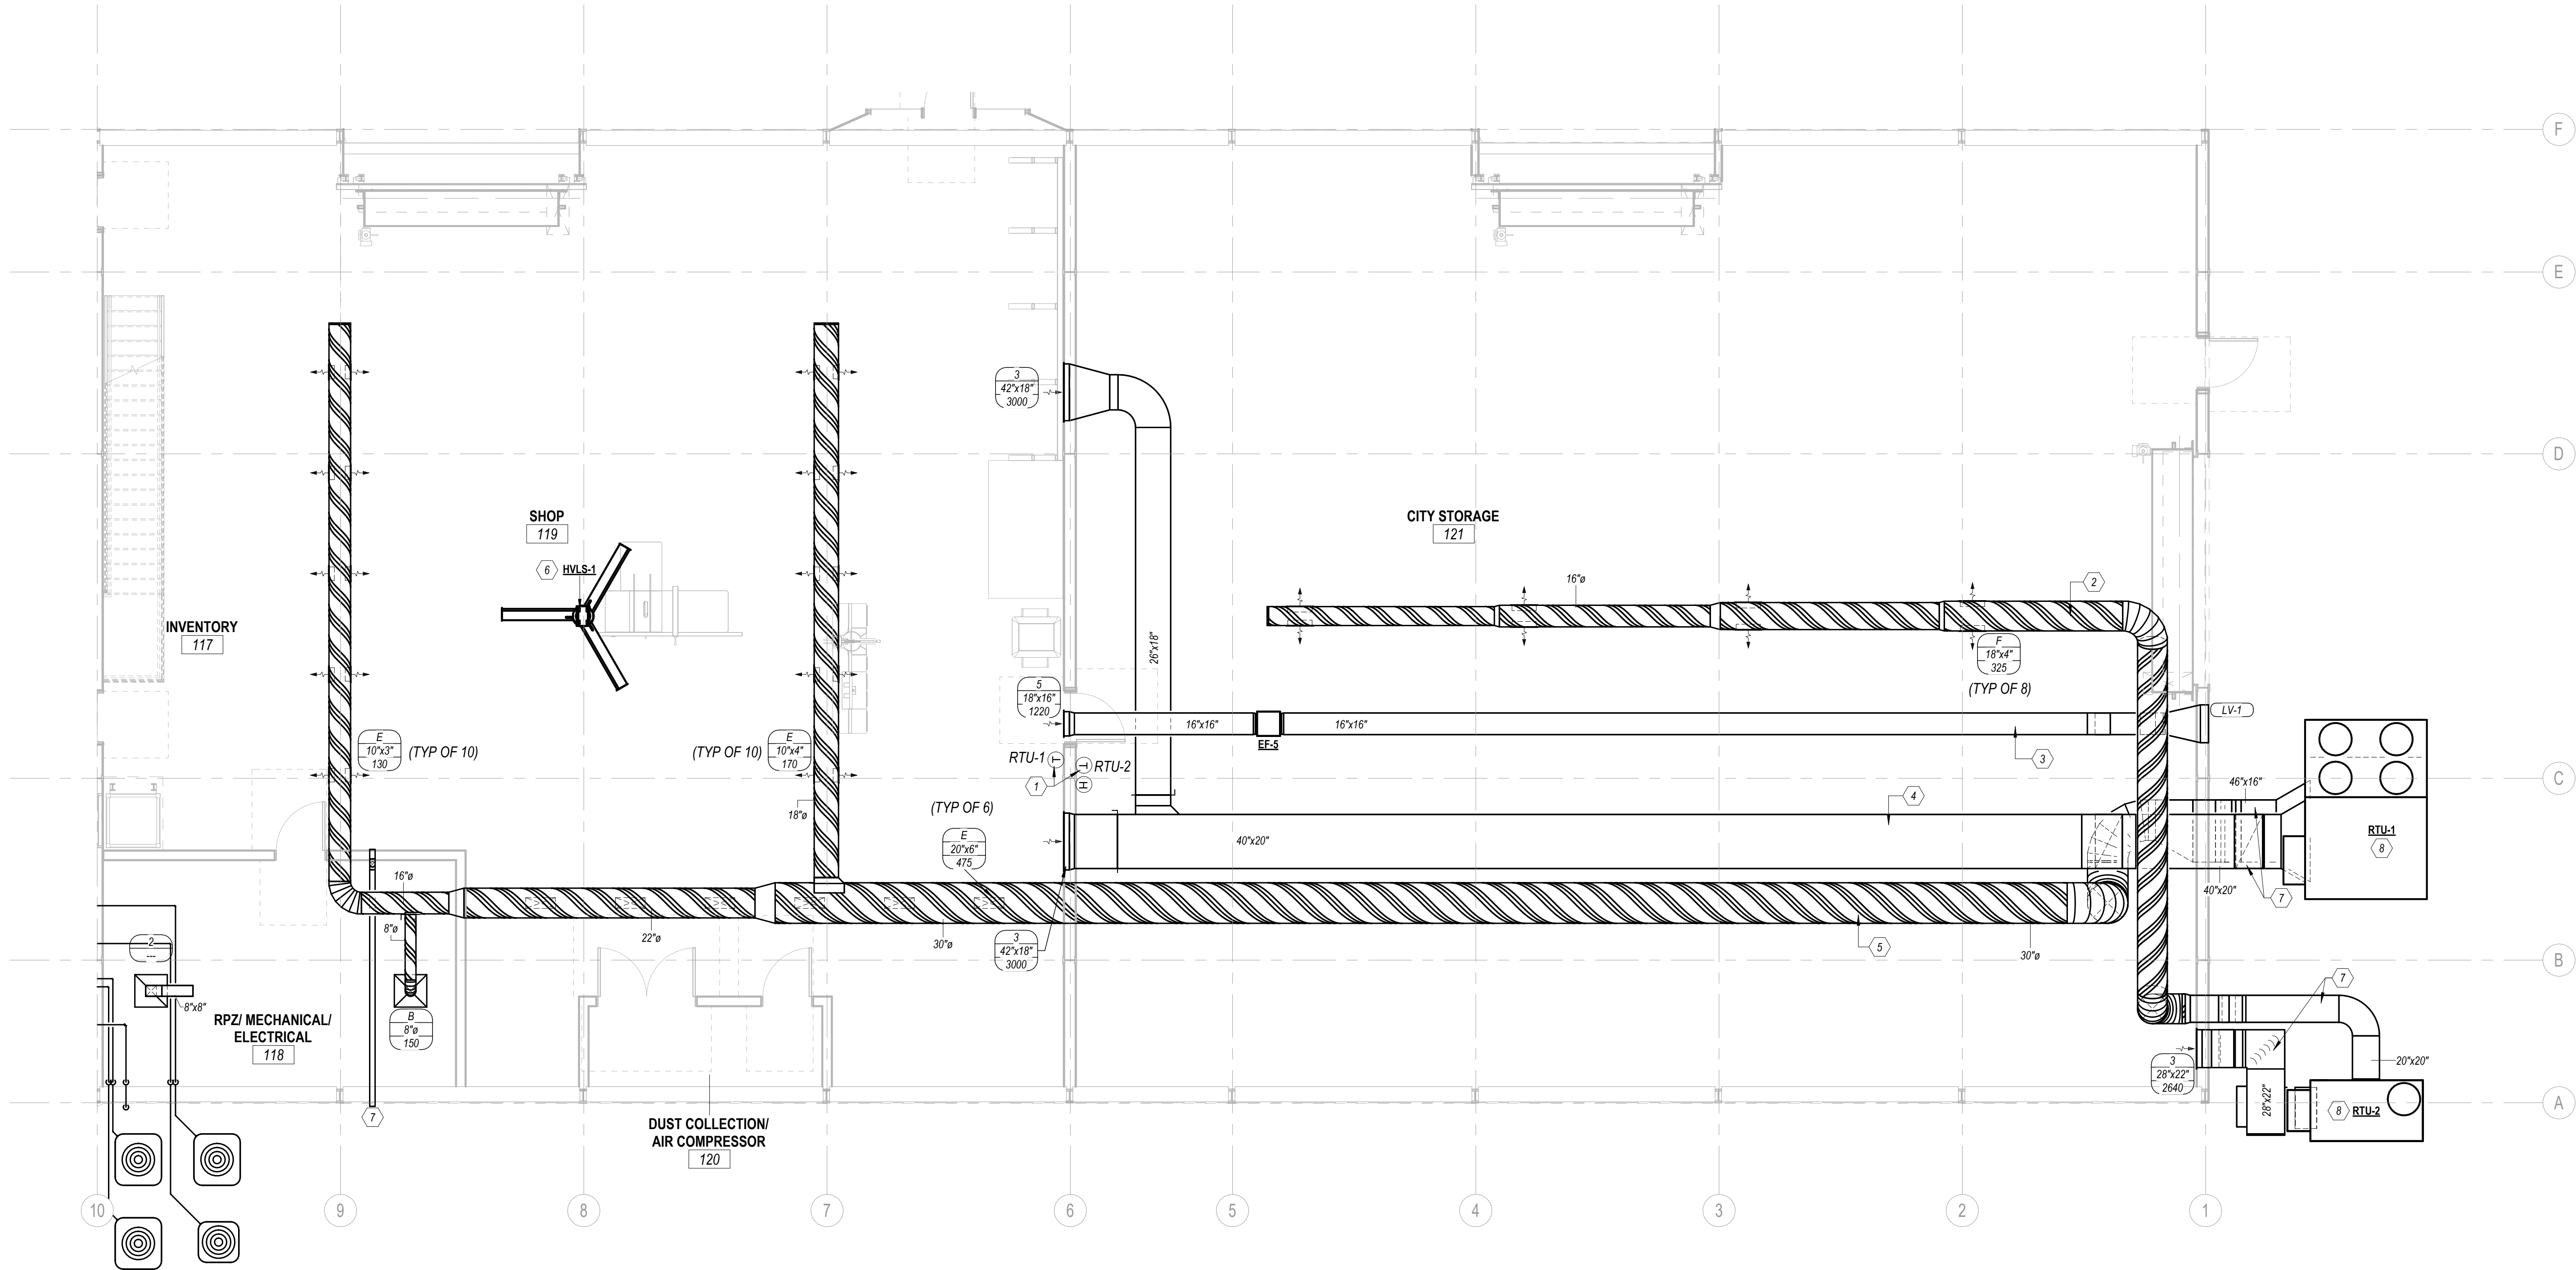

1 MECHANICAL ENLARGED SHOP PLAN

3/16" = 1'-0"

