

DISCONNECT SCHEDULE						
TAG	DESCRIPTION	POLES	VOLTAGE	NEMA TYPE	MOUNTING	FUSE SIZE
DS1	30A DISCONNECT	2	208 V	3R	SURFACE	N/A
DS2	30A DISCONNECT	3	208 V	3R	SURFACE	N/A
DS3	30A DISCONNECT	2	208 V	1	SURFACE	N/A
DS4	60A DISCONNECT	3	208 V	1	SURFACE	N/A
DS5	60A DISCONNECT	2	208 V	1	SURFACE	N/A

MECHANICAL AND PLUMBING
GENERAL COORDINATION NOTES

- PROVIDE 1" CONDUITS WITH PULL STRINGS AND JUNCTION BOXES AS REQUIRED FROM HVAC UNITS TO CORRESPONDING INDOOR UNITS AND/OR THERMOSTATS
- COORDINATE LOCATIONS OF FIELD INSTALLED DISCONNECTS AND RECEPTACLES FOR MECHANICAL AND PLUMBING EQUIPMENT WITH RESPECTIVE CONTRACTORS
- COORDINATE CONNECTIONS TO MECHANICAL AND PLUMBING EQUIPMENT WITH RESPECTIVE CONTRACTORS
- COORDINATE REQUIREMENTS OF MOTORIZED DAMPERS WITH MECHANICAL AND CONTROLS CONTRACTORS

- # KEYNOTES:
- 1

UNIT IS PROVIDE WITH FACTORY DISCONNECT AND POWERED CONVENIENCE RECEPTACLE
- 2

UNIT IS PROVIDE WITH FACTORY DISCONNECT
- 3

CIRCUIT AND SWITCH EXHAUST FAN WITH ROOM LIGHT FIXTURES
- 4

INTERLOCK WITH FU-4 TO OPERATE WHEN IN OCCUPIED MODE.
- 5

MAKE CONNECTIONS FOR HVLS PER MANUFACTURER'S INSTRUCTIONS. COORDINATE WITH FIRE ALARM CONTRACTOR TO PROVIDE CONTROLS TO SHUT DOWN FAN UPON RECEIVING A WATER FLOW SIGNAL FROM THE FIRE ALARM SYSTEM.
- 6

PROVIDE RECEPTACLE IN HVAC MEZZANINE SPACE FOR MAINTENANCE REQUIREMENTS
- 7

PROVIDE POWER TO MOTORIZED DAMPER. DAMPER TO BE INTERLOCKED SO IT IS OPEN WHEN ANY FU IS THE OCCUPIED MODE AND CLOSED OTHERWISE.


PRIGM
ENGINEERING

310 W. DICKSON ST., SUITE 210
FAYETTEVILLE, AR 72701
479.877.3188 | WWW.PRIGM.COM
#25078

CERTIFICATE OF AUTHORIZATION
PRIGM
ENGINEERING, PLLC
No. 3588
ARKANSAS

STATE OF
ARKANSAS
REGISTERED
PROFESSIONAL
ENGINEER
DANIEL E. MILES
No. 14710
05/08/2026

DEMEX
ARCHITECTURE
104 N EAST AVENUE
FAYETTEVILLE, ARKANSAS 72701 | 479.986.4871

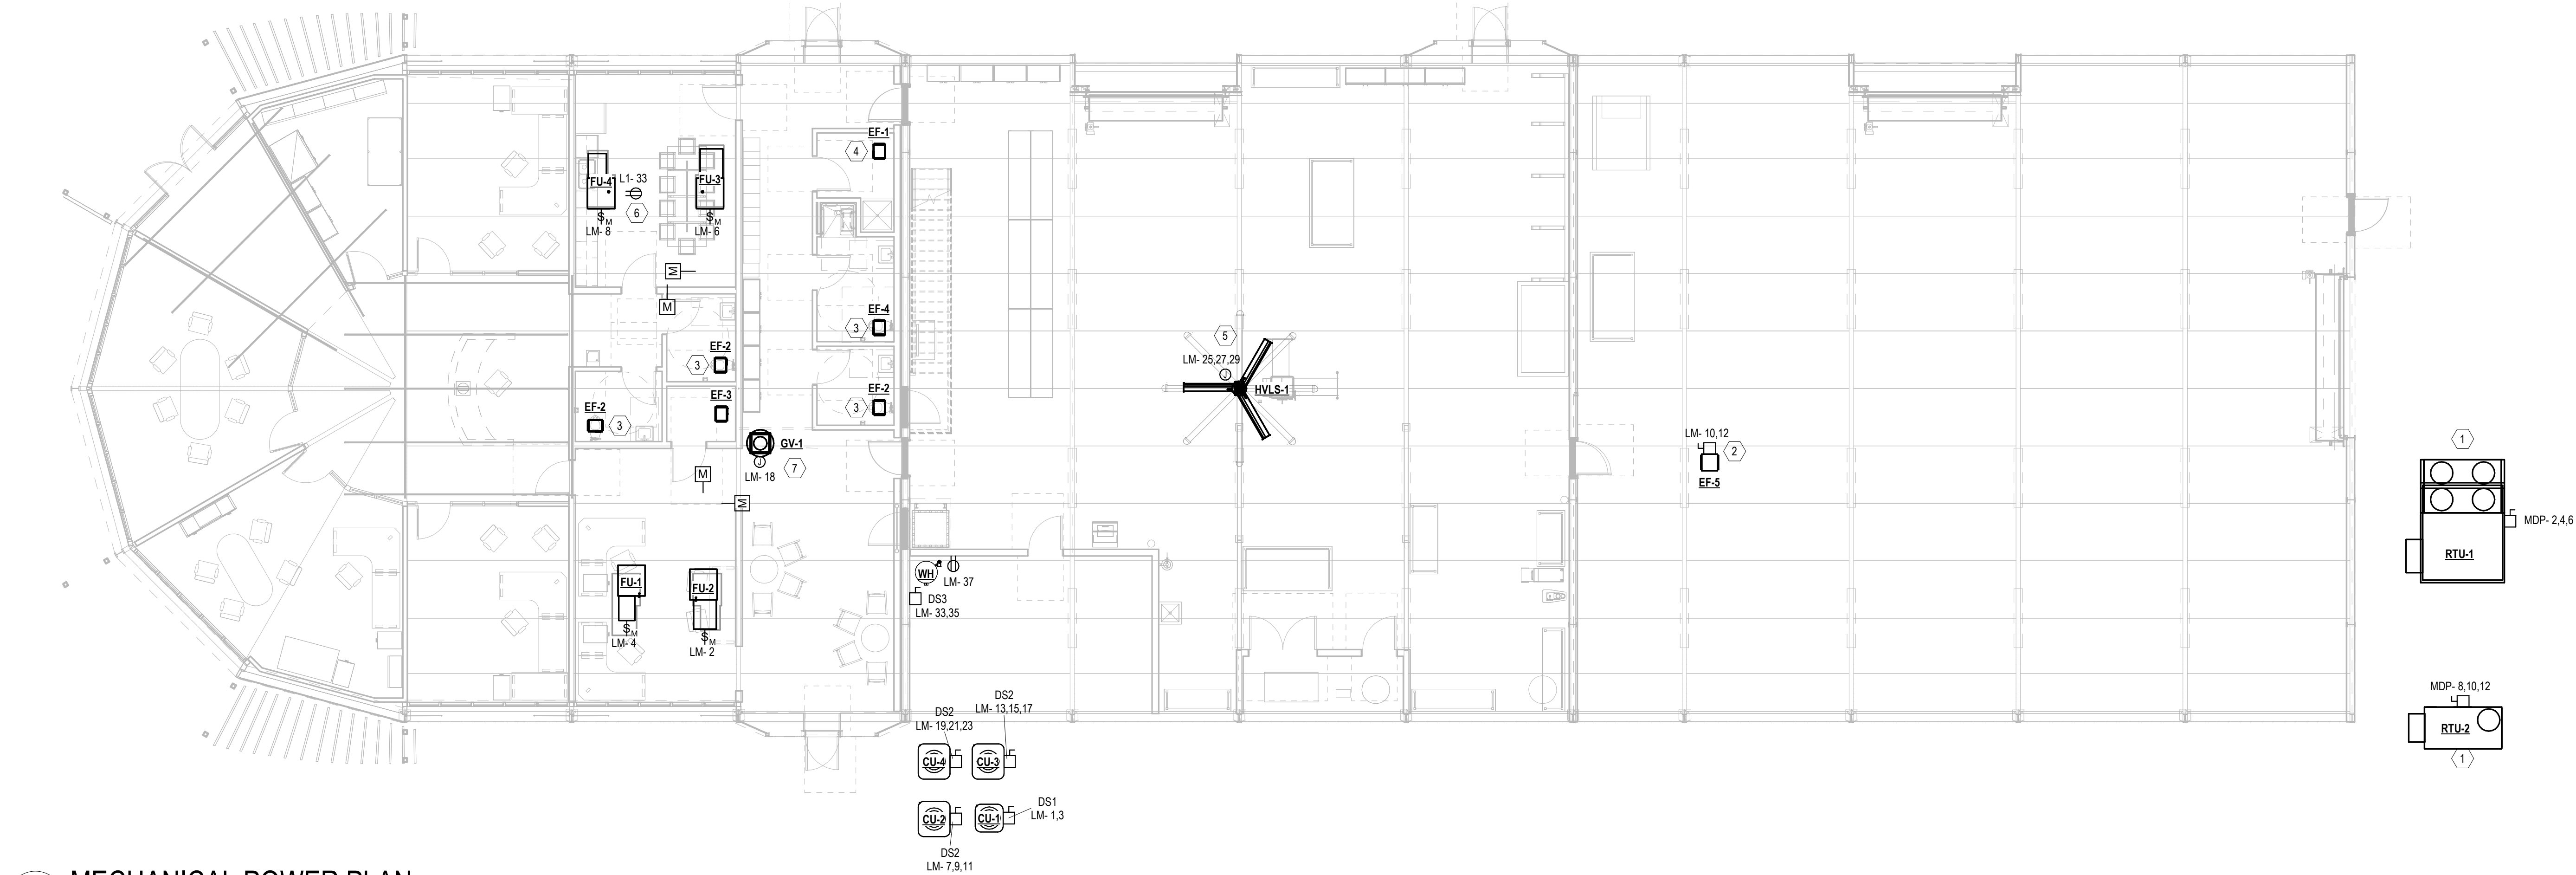

1 MECHANICAL POWER PLAN
1/8" = 1'-0"