

SHEET KEYNOTES

- 02.12 ICRA BARRIER TO BE INSTALLED PRIOR TO START OF CONSTRUCTION PERIOD WORK ACTIVITIES. BARRIER TO BE REMOVED UPON COMPLETING CONSTRUCTION PERIOD WORK ACTIVITIES. BARRIER INCLUDES PAINTED TEMPORARY WALLS, DOOR, AND LOCKING HARDWARE. COORDINATE KEYING WITH VA-COR.
- 02.23 PROTECT WALL MOUNTED DEVICES DURING CONSTRUCTION.
- 02.24 CUT WALL PROTECTION AND WALL BASE FOR NEW WALL.
- 02.25 DEMO EXISTING CRASH RAILS AND CORNER GUARD. PATCH AND PAINT WALLS TO REMAIN, EXPOSED TO VIEW.
- 02.26 REMOVE AND RELOCATE EXIT SIGN.
- 02.28 REMOVE EXISTING CEILING TILES TO INSTALL NEW FURRING WALLS.


PARTITION LEGEND

- EXISTING PARTITION / BARRIER - WALL TO REMAIN
- EXISTING PARTITION / BARRIER - WALL TO BE REMOVED
- NEW PARTITION / BARRIER - WALL



PARTITION GRAPHICS

- NO RATING
- SMOKE RESISTIVE PARTITION - NON RATED
- 1 HOUR FIRE BARRIER
- 1 HOUR FIRE/SMOKE BARRIER
- 2 HOUR FIRE BARRIER
- 2 HOUR FIRE/ SMOKE BARRIER

KEY PLAN

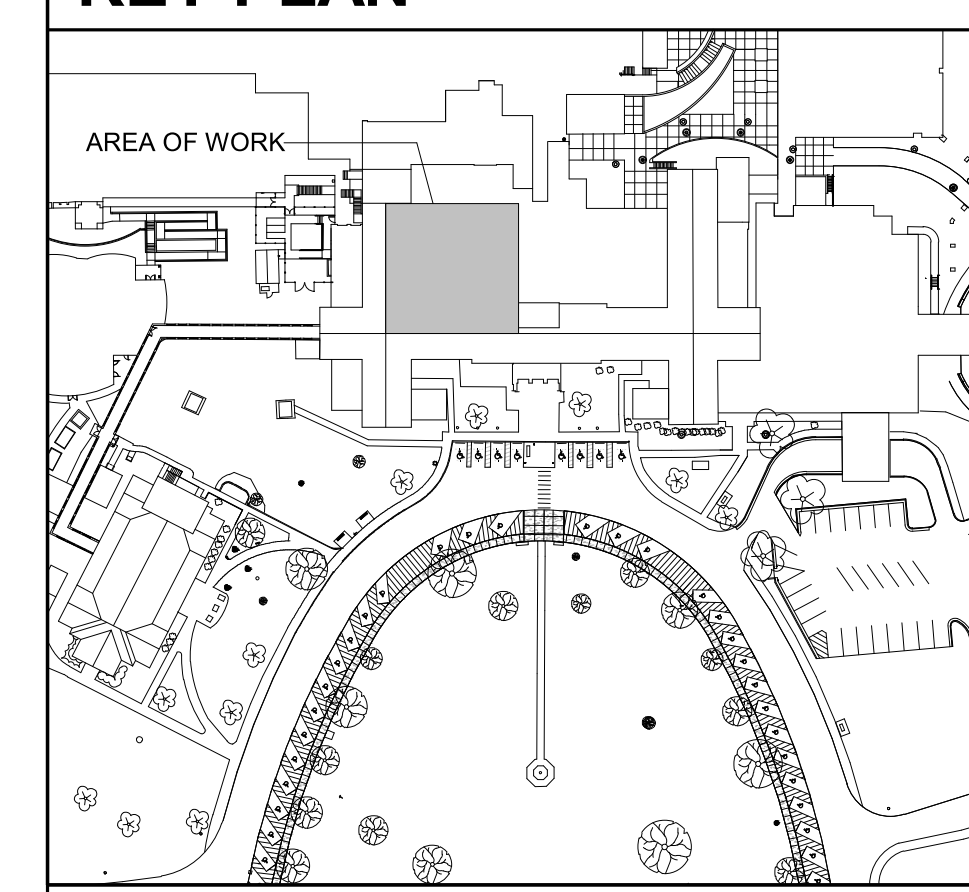

NORTH LEGEND

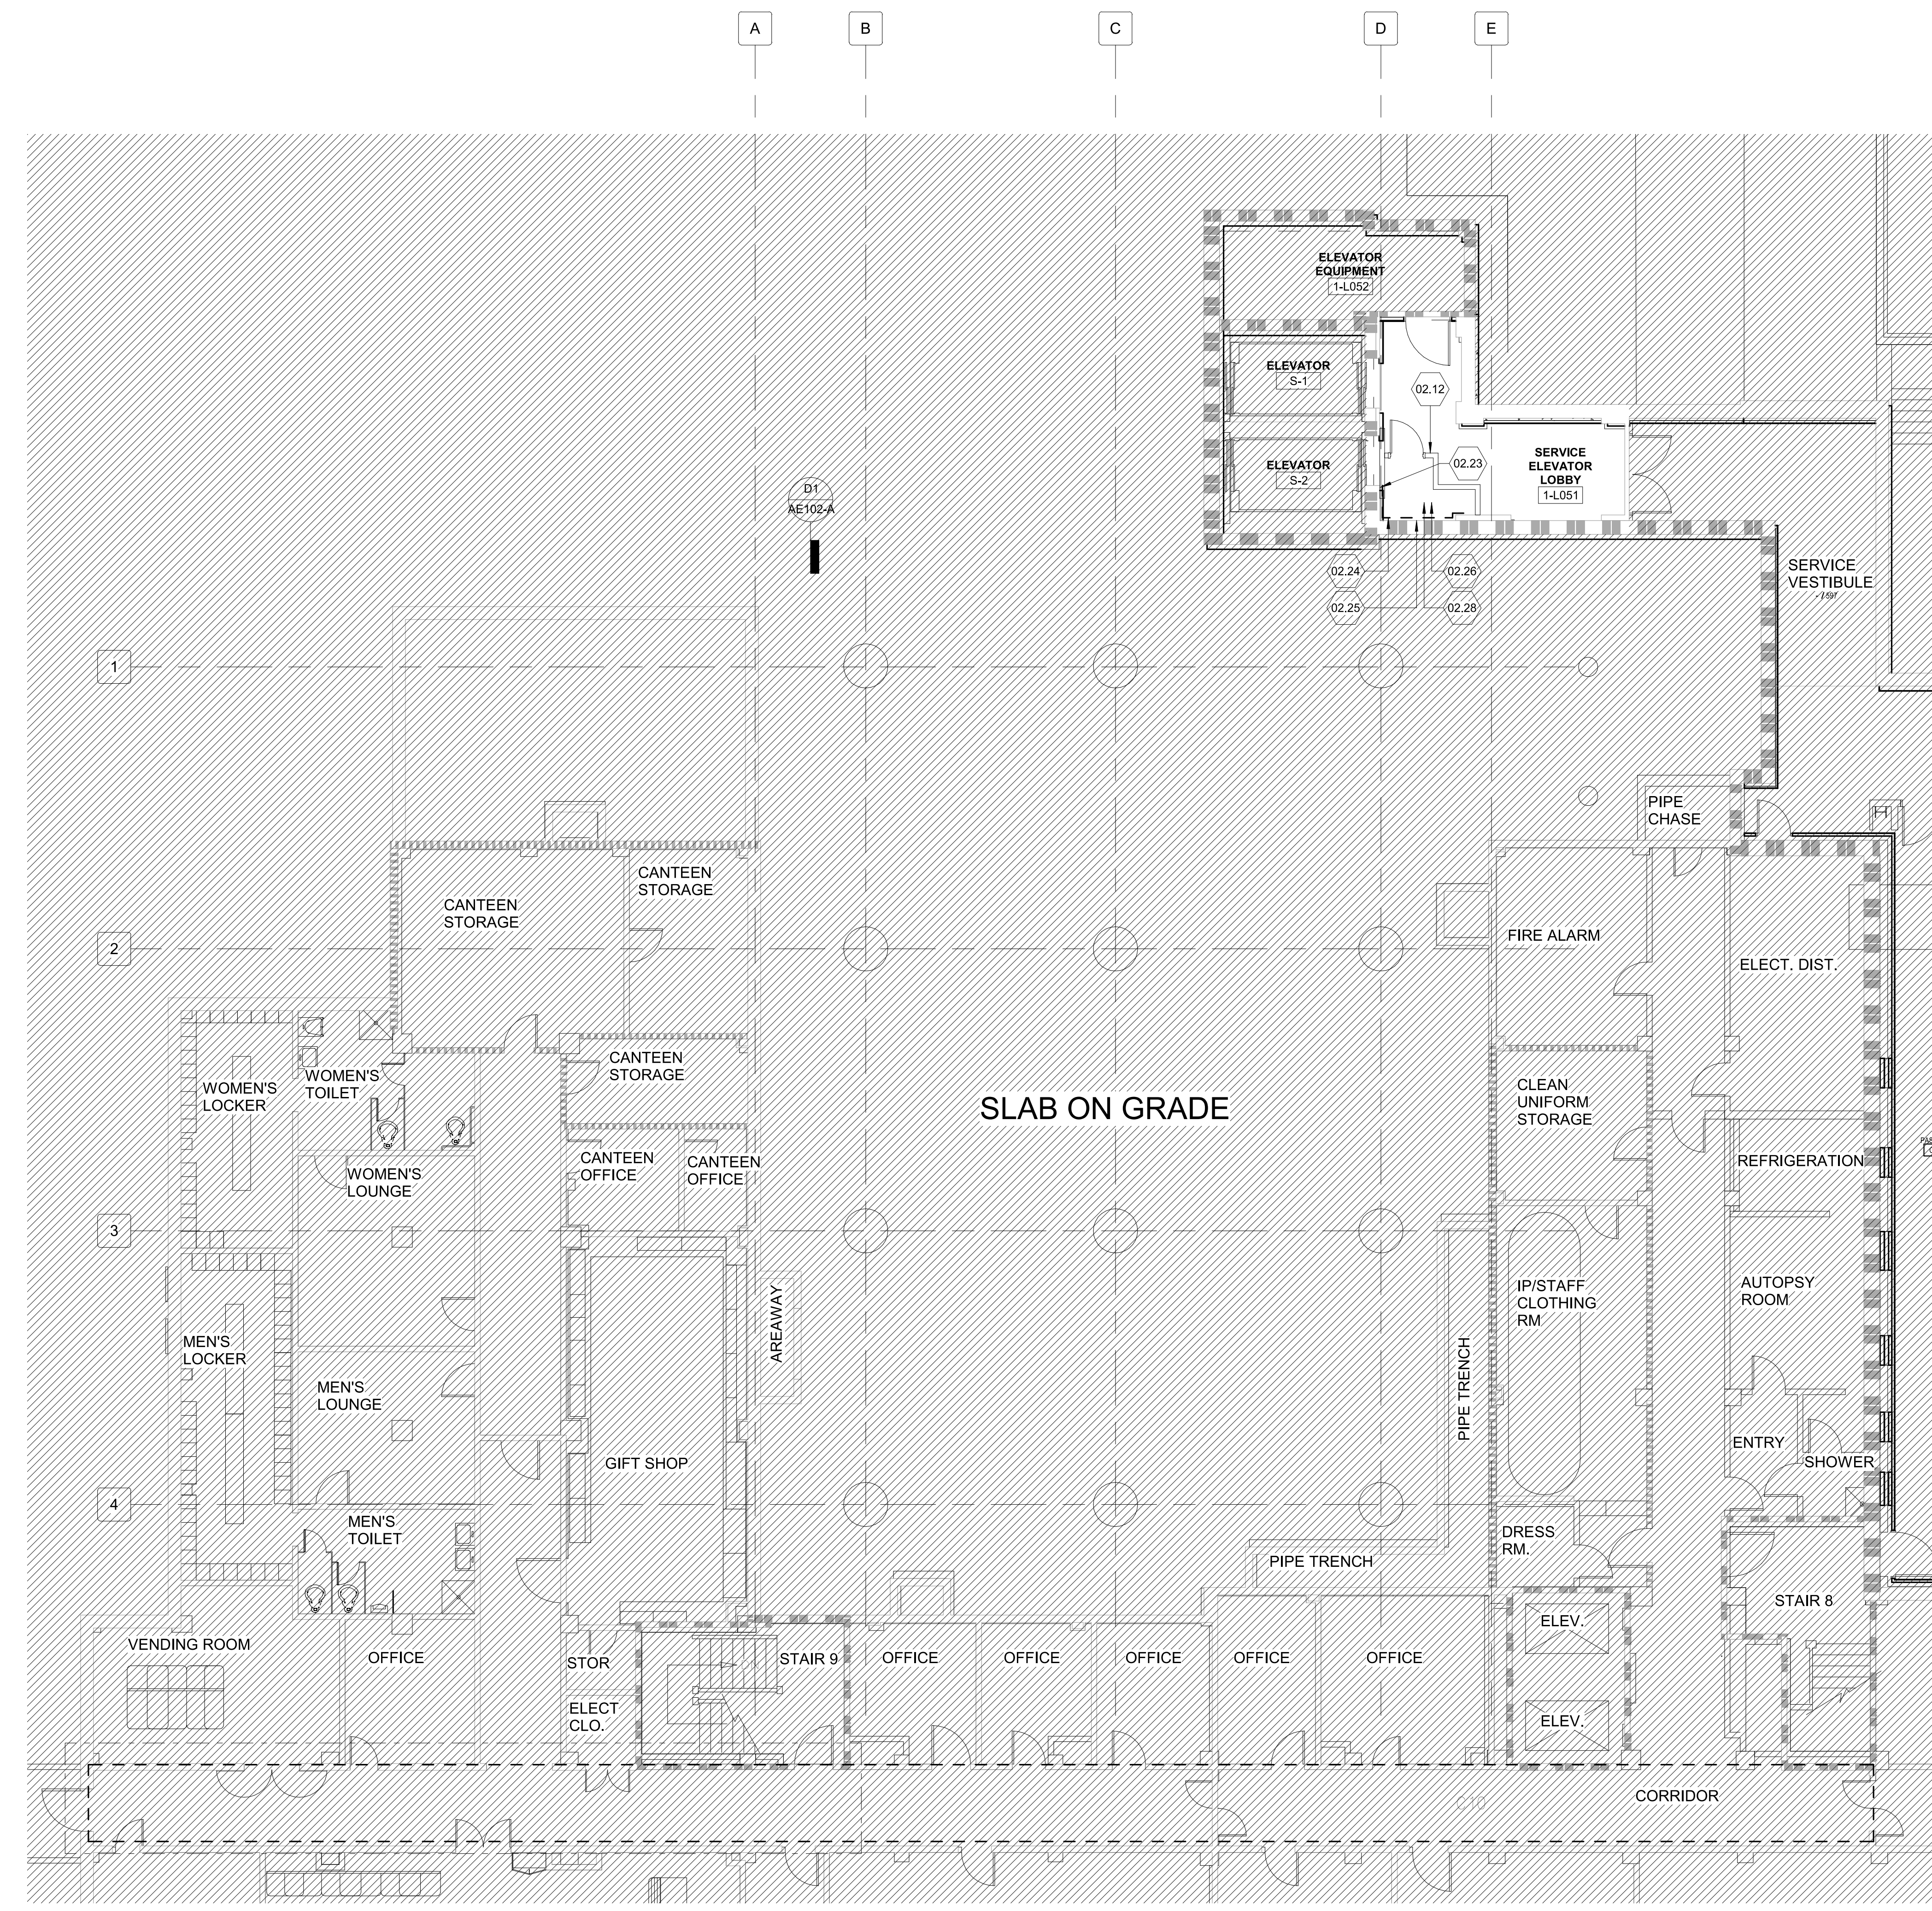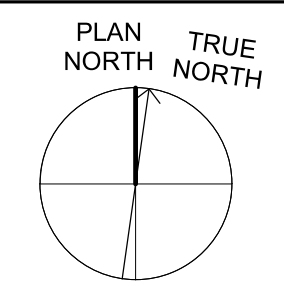

F5 BASEMENT FLOOR - DEMOLITION PLAN
1/8" = 1'-0"

0 4' 8' 16'