

GENERAL NOTES

1. REFER TO SHEET MH001-A FOR LEGENDS, STANDARDS, AND ABBREVIATIONS.


SHEET KEYNOTES

1. DEMOLISH DUCTWORK AND ASSOCIATED TERMINAL UNITS, DIFFUSERS, GRILLES, AND ACCESSORIES BACK TO MAIN AND CAP DUCTS.
2. REMOVE 3" CHWIR PIPING IN THIS LOCATION AND OFFSET BELOW FLOOR TO NEW LOCATION SHOWN.
3. EXISTING 14"x8" EXHAUST DUCT UP TO EF-3.
4. REMOVE CEILING CASSETTE AND ASSOCIATED CONDENSING UNIT AND TURN OVER TO THE VA.
5. CUT EXISTING DUCT SO THAT THE INTAKE SCREEN/GRILLE CAN BE REATTACHED.
6. EXISTING 24"x12" SUPPLY DUCT DOWN FROM 1-AHU-10.
7. EXISTING 24"x12" RETURN DUCT UP TO 1-AHU-10.
8. EXISTING 30"x26" SUPPLY DUCT DOWN FROM 1-AHU-2.
9. EXISTING 26"x26" EXHAUST DUCT UP TO 1-EF-5.
10. ALL WORK IN CORRIDOR L108 MUST BE PERFORMED AFTER HOURS. CORRIDOR MUST BE PATIENT ACCESSIBLE DURING FACILITY OPERATION HOURS. SEE SHEET #E114A FOR MORE INFORMATION.
11. PERFORM THIS WORK AFTER HOURS, FOR NO MORE THAN FOUR CONSECUTIVE DAYS.


PARTITION GRAPHICS

- NO RATING
- SMOKE RESISTIVE PARTITION - NON RATED
- 1 HOUR FIRE BARRIER
- 1 HOUR FIRE/SMOKE BARRIER
- 2 HOUR FIRE BARRIER
- 2 HOUR FIRE/ SMOKE BARRIER

KEY PLAN

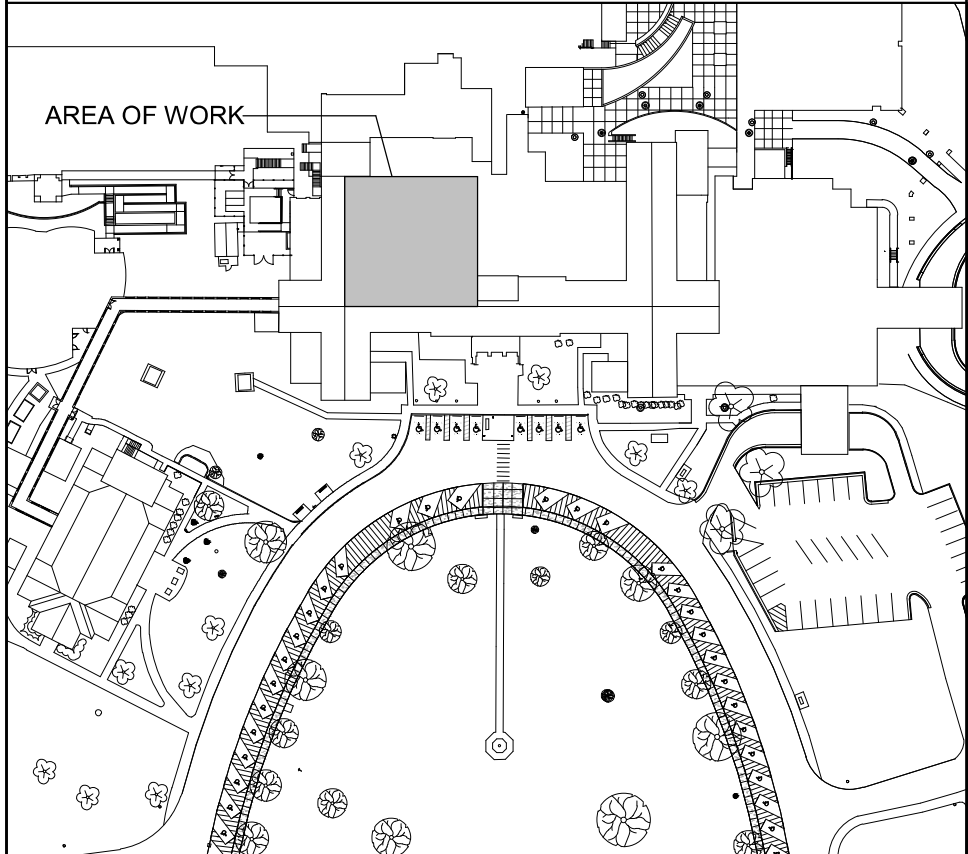


NORTH LEGEND

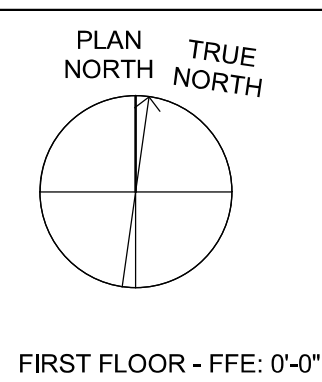

F4 FIRST FLOOR MECHANICAL DEMOLITION PLAN

1/8" = 1'-0"

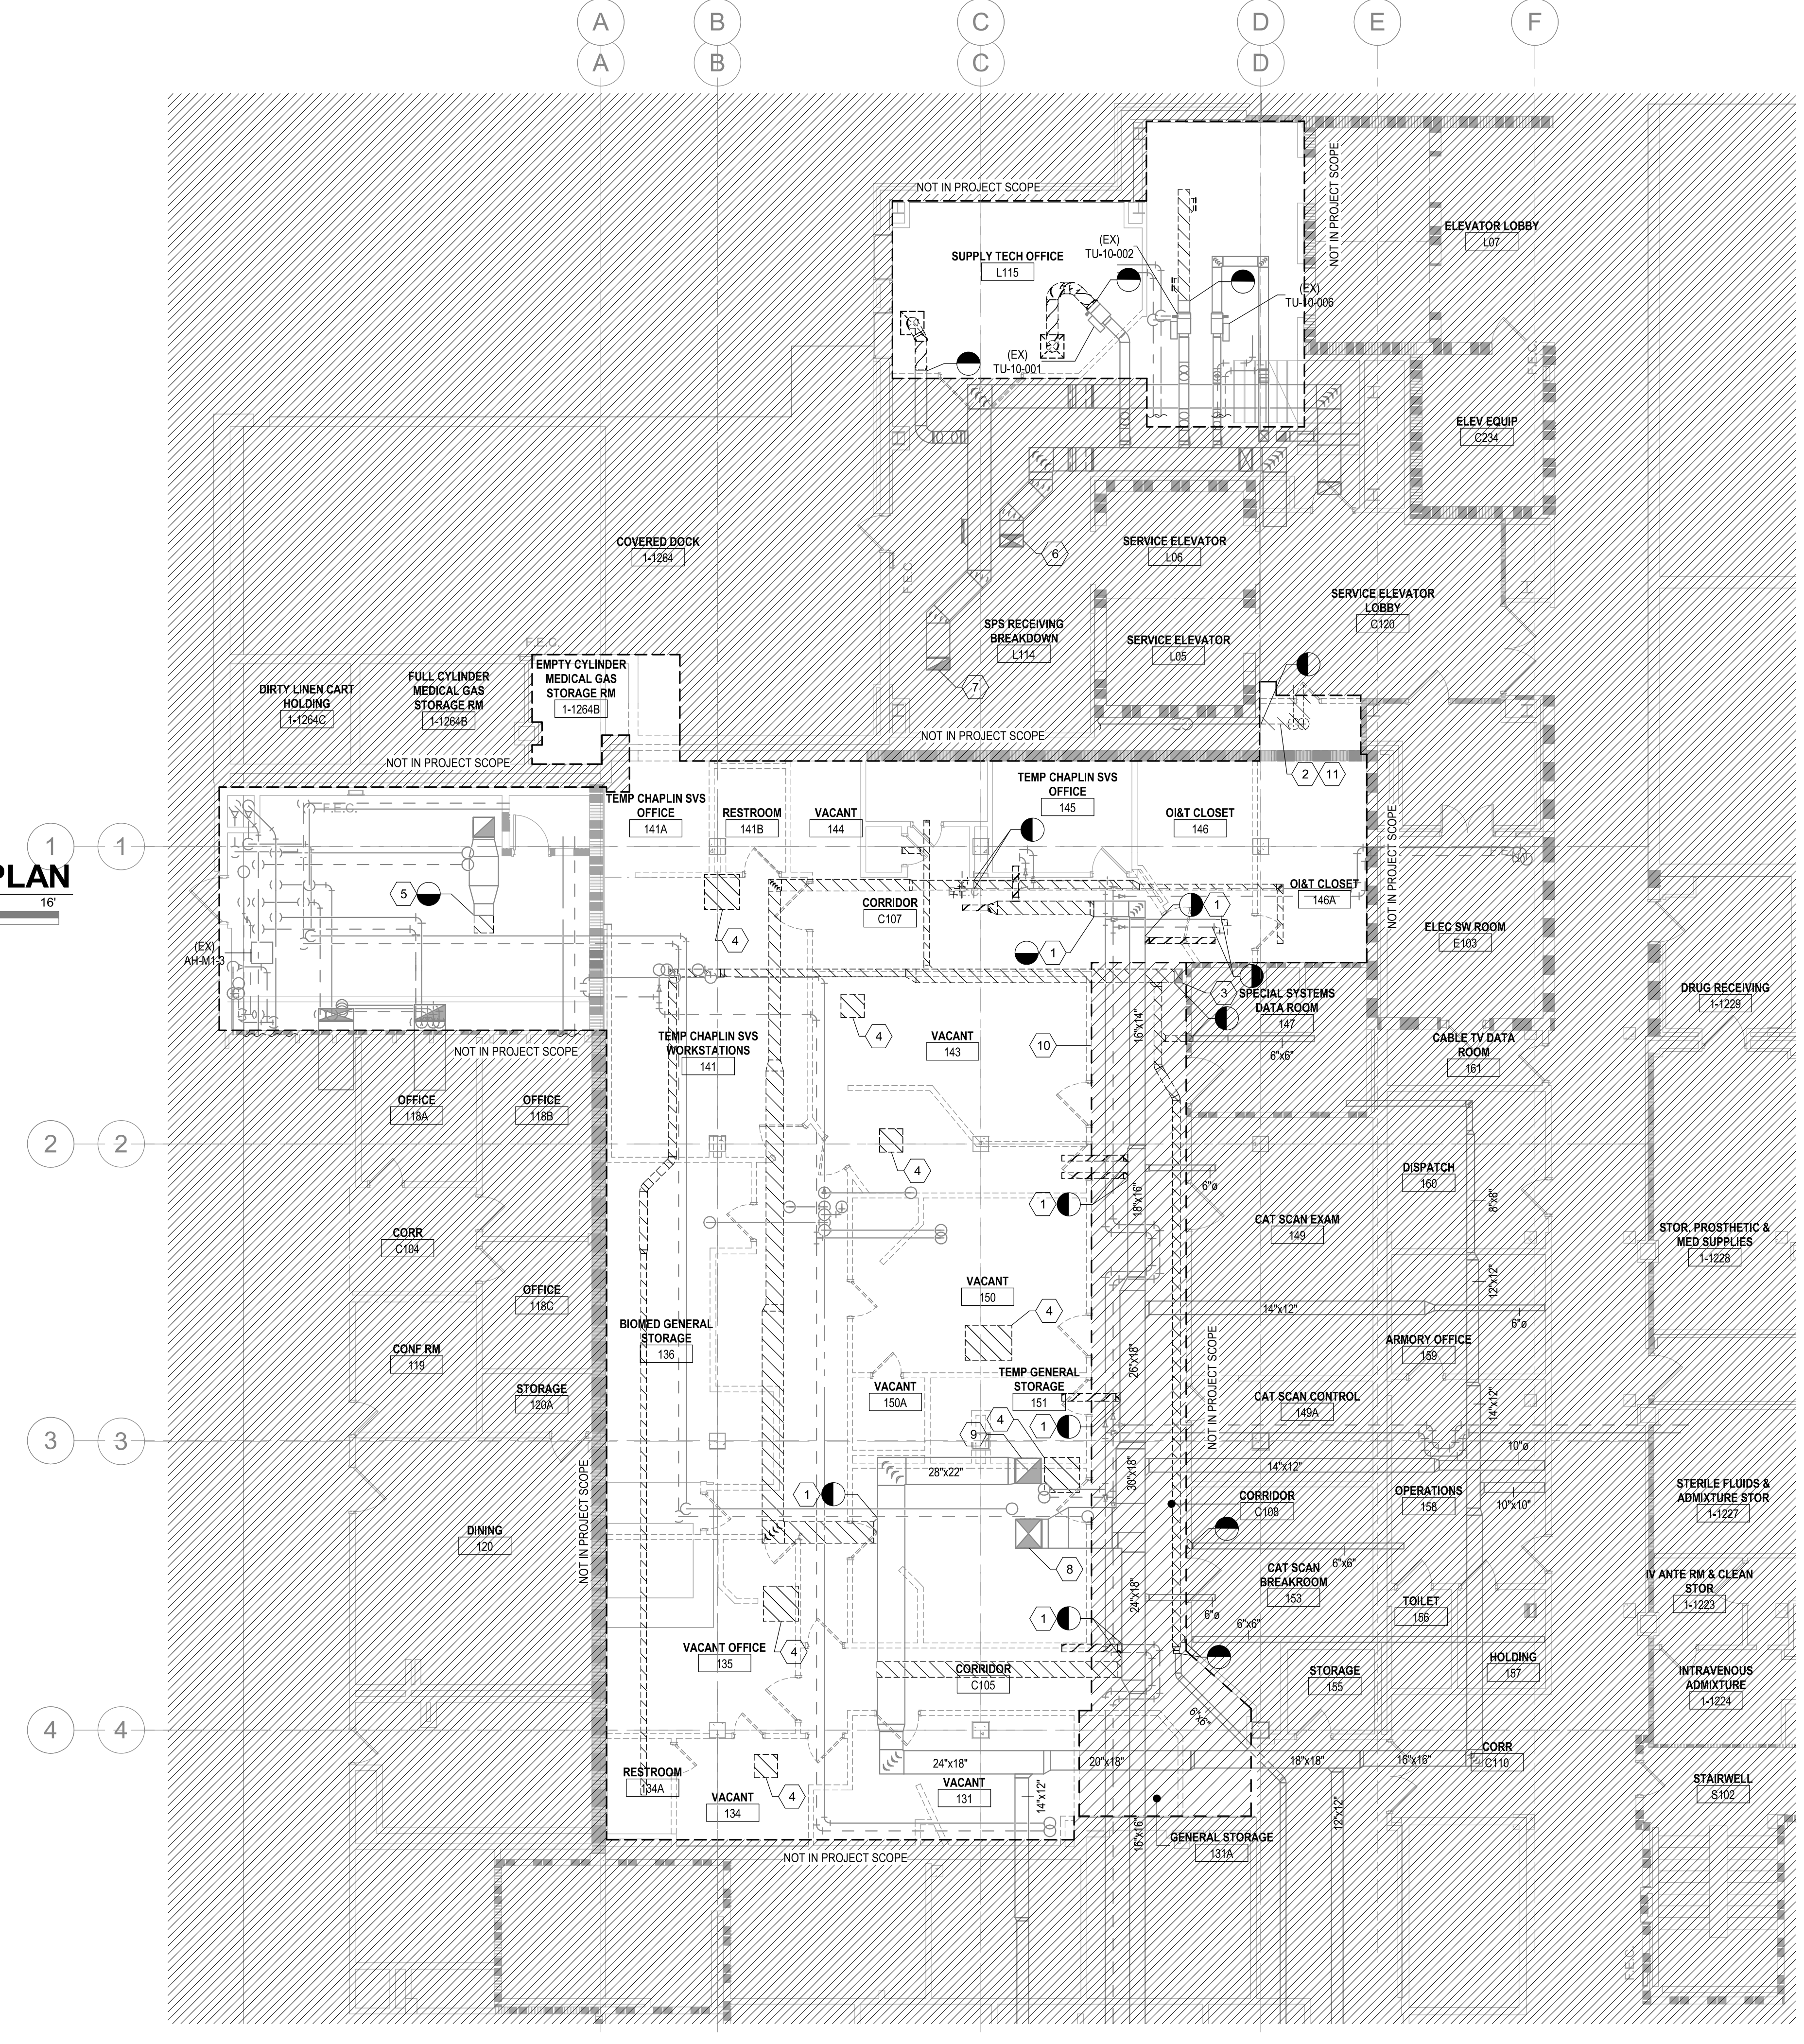

C2 BASEMENT ELEVATOR LOBBY MECHANICAL DEMOLITION PLAN

1/8" = 1'-0"

