

KEYNOTES


- 02.03 PROTECT EXISTING WALL, GLAZING, AND DOOR TO REMAIN
- 02.05 REMOVE TOILET ACCESSORIES FROM WALLS
- 02.06 REMOVE TOILET PARTITIONS
- 02.08 REMOVE EXISTING EXTERIOR DOOR, FRAME, AND HARDWARE
- 02.13 REMOVE STONE SHOWER ENCLOSURE AND TILE BASE
- 02.15 REMOVE EXISTING EXTERIOR HOLLOW METAL DOOR, HOLLOW METAL FRAME, HARDWARE, WOOD BLOCKING AND WOOD TRIM; EXISTING TRANSOM AND WOOD DOOR FRAME TO REMAIN. NOTIFY CONTRACTING OFFICER ONCE TRIM IS REMOVED TO CONFIRM HIDDEN CONDITIONS PRIOR TO PROCUREMENT OF NEW DOOR AND FRAME.
- 02.18 REMOVE EXISTING WINDOW.
- 02.19 REMOVE CEILING ONLY. PLASTER WALLS TO REMAIN.

DEMOLITION PLAN LEGEND



- EXISTING WALLS TO REMAIN
- REMOVE EXISTING BLOCK OR CLAY TILE MASONRY & PLASTER WALLS INCLUDING FINISHES AND CASEWORK
- REMOVE EXISTING CONSTRUCTION - REFER TO KEYNOTES
- REMOVE EXISTING DOOR AND FRAME
- REMOVE EXISTING PLASTER WALLS AND CEILING
- REMOVE EXISTING TILE FLOORS & SETTING MATERIALS DOWN TO SUBSTRATE (PORCELAIN/GLAZED TILE UON)
- CONCRETE**
- CT-2 APPROXIMATE AREA OF CONC. FLOOR SLAB TO BE REMOVED FOR UTILITY WORK, COORDINATE WITH MEP SCOPE

DEMOLITION PLAN GENERAL NOTES

1. EXISTING FLOOR TO CEILING PARTITIONS INDICATED TO BE DEMOLISHED INCLUDES DOORS/Frames AND FINISHES/CASEWORK ATTACHED TO SUCH WALLS.
2. REMOVE ALL DEBRIS FROM FLOORS, THROUGHOUT BUILDING.
3. ALL AREAS OR ELEMENTS NOT DESIGNATED TO BE DEMOLISHED ARE EXISTING TO REMAIN AND SHALL BE PROTECTED FROM DAMAGE DURING ADJACENT DEMOLITION WORK.
4. ALL EXISTING EXTERIOR WINDOWS ARE TO REMAIN, UON. PROTECT FROM DAMAGE DURING ADJACENT WORK.
5. ALL EXISTING CEILINGS AND LAYLIGHTS THROUGHOUT UPPER FLOOR ARE TO REMAIN. PROTECT FROM DAMAGE DURING ADJACENT WORK.
6. HAZARDOUS MATERIALS ARE PRESENT IN/ON SELECT EXISTING MATERIALS - REFER TO HAZARDOUS MATERIAL SPECIFICATIONS FOR LOCATIONS. REFER TO SPECIFICATIONS FOR ABATEMENT, REMOVAL AND DISPOSAL.
7. ELEVATOR IS NOT OPERATIONAL. CONTRACTOR IS NOT TO OCCUPY, OPERATE, OR PLACE ANY MATERIALS IN THE ELEVATOR CAB OR HOISTWAY.

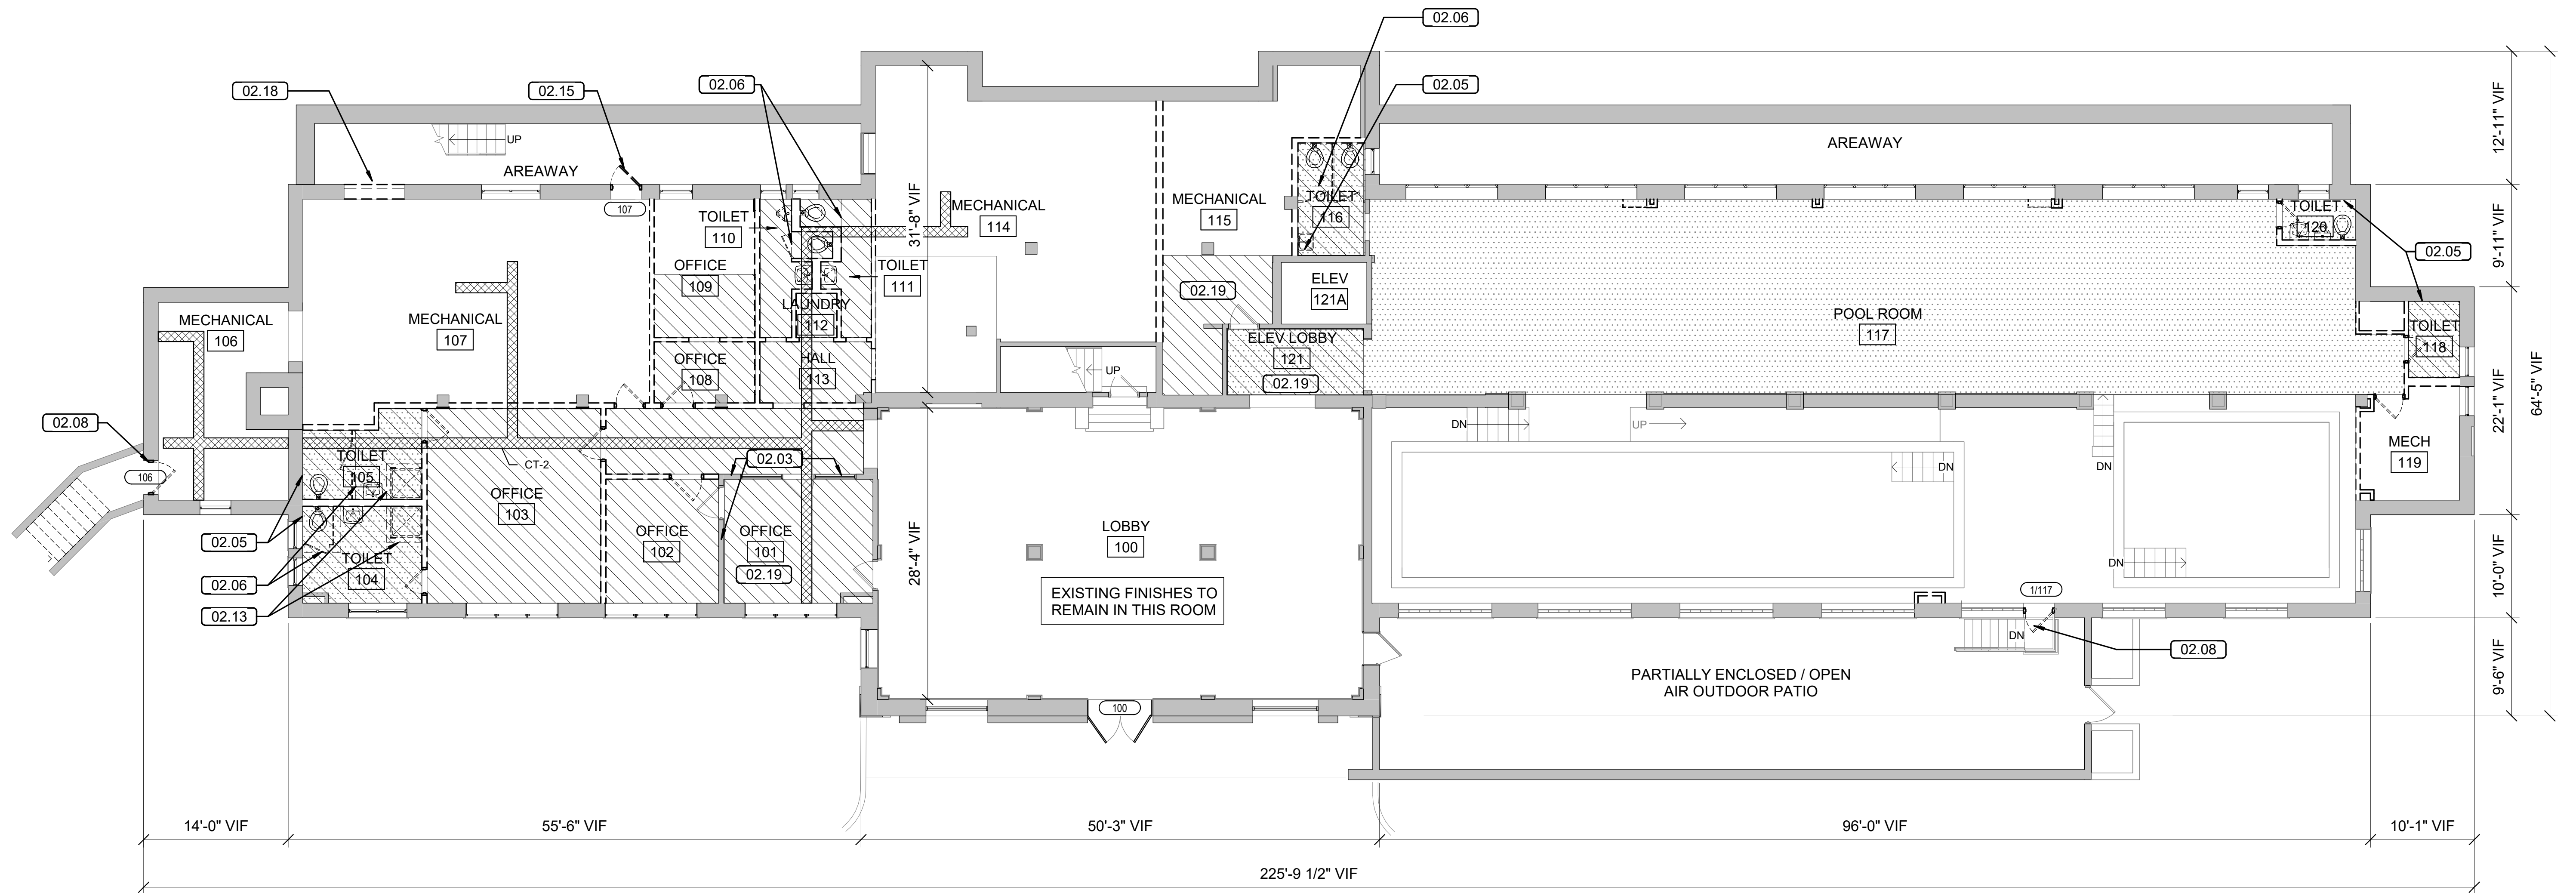

1 LOWER LEVEL DEMOLITION PLAN
AX1.1 1/8" = 1'-0"



| | | | | |
|---|---------------|---------------|---------------------------|--------------|
| A/E FIRMS | DESIGNED: | SUB SHEET NO. | TITLE OF SHEET | DRAWING NO. |
| ARCH: QUINN EVANS 219 1/2 N. MAIN STREET ANN ARBOR, MI T: 734.663.5888 | GK | 02 AX1.1 | LIBBEY BATHHOUSE | 128 |
| | CADD: | | LOWER LEVEL DEMOLITION | 182951 |
| | GK | | PLAN | PMIS/PKG NO. |
| | TECH. REVIEW: | | REHABILITATE BATHHOUSES | 318915 |
| | KG | | HOT SPRINGS NATIONAL PARK | SHEET |
| | DATE: | | | 203 OF 286 |
| | 10.27.2023 | | | |