



Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.
P.O. Box 16620
LittleRock, AR 72231
Phone 501-834-3320
Fax 501-834-5416

Date: 8/21/2025

Return Request: 9/4/2025

Project: Hot Springs National Park – Rehabilitate Bathhouses – Buckstaff Bathhouse

Supplier: Comfort Systems USA (Arkansas), Inc.

Manufacturer: Nibco

Submittal: General-Duty Valves for HVAC Piping

Submittal Number: 230523.001

Spec Section: 230523, 2.4 through 2.11

Drawing # and Installation Location: M3-1 through M3-4, and M4-1

ARCHITECT

Kenneth Hahn Architects, Inc.
1343 S. 75th Street
Omaha, Nebraska 68124
(402)391-2111

GENERAL CONTRACTOR

Tepa, LLC
2345 Grand Blvd, Suite 700
Kansas City, Missouri 64108
(816)708-1110

ENGINEER

Alvine Engineering
1201 Cass Street
Omaha, Nebraska 68102
(402)346-7007

MECHANICAL SUBCONTRACTOR

Comfort Systems USA (Arkansas), Inc.
9924 Landers Road
North Little Rock, Arkansas 72117
(501)834-3320

Comments:

CSUSA PROJECT NO.

25-7065

joe@comfortar.com

9924 Landers Road
No. LittleRock, AR 72117



Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.

P.O. Box 16620

LittleRock, AR 72231

Phone 501-834-3320

Fax 501-834-5416

Spec Section 230523, 2.4, A.

Bronze Globe Valves

Class 150 Bronze Globe Valves

Union Bonnet • Integral Seat • Renewable Seat Disc

150 PSI/10.3 bar saturated steam to 366°F/185°C
300 PSI/20.7 bar non-shock cold working pressure

CONFORMS TO MSS SP-80

MATERIAL LIST


PART	SPECIFICATION
1. Handwheel Nut	300 Series Stainless Steel
2. Identification Plate	Aluminum
3. Handwheel	Malleable Iron ASTM A 47
4. Stem	Silicon Bronze ASTM B 371 Alloy C69400/C69430
5. Packing Gland	Bronze ASTM B 62 Brass ASTM B16 C36000
6. Packing Nut	Bronze ASTM B 62 or ASTM B124 Alloy C37700 or Brass ASTM B16 C36000
7. Packing	Aramid Fibers with Graphite
8. Bonnet	Bronze ASTM B 62
9. Union Nut	Bronze ASTM B 62
10. Body	Bronze ASTM B 62
11. Disc Holder	Bronze ASTM B 62
12. Disc	Steam (PTFE) (Y)
13. Disc Nut	Bronze ASTM B 62/ASTM B 98 Alloy C65100 w/SS Washer




T-235-Y
Threaded



S-235-Y
Solder

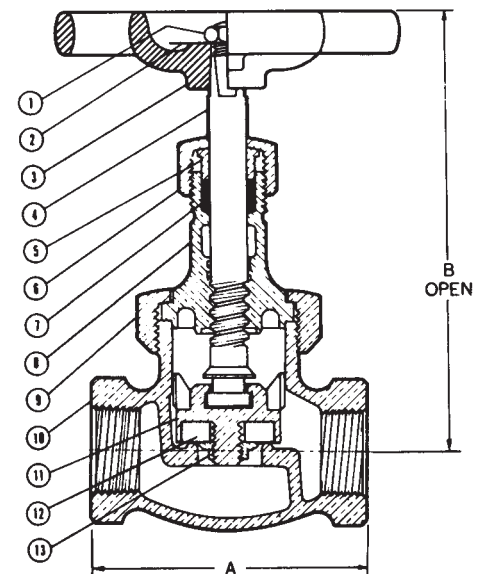

T-235-Y
NPT x NPT



S-235-Y
C x C

DIMENSIONS—WEIGHTS—QUANTITIES

Size	Dimensions											Master Ctn. Qty.	
	In.	mm.	A	B	C								
† 1/8	6	2.31	59	3.88	99	2.00	51	1.21	0.55	1.06	0.48	50	50
† 1/4	8	2.31	59	3.88	99	1.88	48	1.19	0.54	1.05	0.48	50	50
† 3/8	10	2.38	60	3.88	99	1.75	45	1.17	0.53	1.03	0.47	50	50
1/2	15	2.69	68	4.63	118	1.88	48	1.60	0.73	1.38	0.62	40	50
3/4	20	3.19	81	5.38	137	2.31	59	2.34	1.06	2.21	1.00	20	20
1	25	3.75	95	6.00	153	2.88	73	3.56	1.61	3.35	1.52	10	20
1 1/4	32	4.25	108	6.56	167	3.13	79	5.76	2.61	4.93	2.23	10	10
1 1/2	40	4.75	121	7.38	187	3.75	95	7.59	3.44	7.17	3.25	6	10
2	50	5.75	146	8.31	211	4.50	114	12.56	5.70	11.02	5.00	4	4
2 1/2	65	6.63	168	10.19	259	5.38	137	17.44	7.91	17.16	7.79	2	2
3	80	7.75	197	11.13	283	6.50	165	23.87	10.83	22.82	10.35	2	2

† No packing gland, packing only in these sizes.

FREEZING WEATHER PRECAUTION: Subsequent to testing a piping system, valves should be left in an open position to allow complete drainage.

♦ For detailed Operating Pressure, refer to Pressure Temperature Chart on page 116.


WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Visit our website for the most current information.



Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.

P.O. Box 16620

LittleRock, AR 72231

Phone 501-834-3320

Fax 501-834-5416

Spec Section 230523, 2.5, A.

Iron Globe Valves

Class 125 Iron Body Globe Valves

Bolted Bonnet • Renewable Seat and Disc* • Bronze Mounted

200 PSI/13.8 bar non-shock cold working pressure to -20°F to 150°F/-29°C to 66°C*
Maximum working temperature 450°F/232°C at 125 PSI/8.6 bar
125 PSI/8.6 bar saturated steam to 353°F/178°C

CONFORMS TO MSS SP-85

MATERIAL LIST

PART	SPECIFICATION
1. Handwheel Nut	Steel ASTM A307
2. Identification Plate	Aluminum
3. Handwheel	Cast Iron ASTM A126 Class B
4. Yoke Bushing	Brass ASTM B584 Alloy C84400
5. Bonnet	Cast Iron ASTM A126 Class B
6. Stem	Copper Alloy ASTM B16 Alloy C36000
7. Gland Follower Nut	Copper Alloy ASTM F467 Alloy C27000
8. Gland Follower	Cast Iron ASTM A126 Class B or Ductile Iron ASTM A536
9. Packing Gland	Zinc Plated Powdered Iron ASTM B783 or Copper Alloy ASTM B16
10. Gland Follower Stud	Steel ASTM A307
11. Packing	Aramid Fibers / Graphite
12. ¹ Body Bolt	Steel ASTM A307/SAE J429
13. Body Gasket	Graphite/SST
14. ¹ Body Nut	Steel ASTM A563
15. Swivel Nut	Copper Alloy ASTM B584 Alloy C84400
16. ² Disc Cage	Cast Iron ASTM A126 Class B
17. ³ Disc	Copper Alloy ASTM B584 Alloy C84400 (B)
**18. ⁴ Disc Plate	Cast Iron ASTM A126 Class B
**19. Disc Nut	Copper Alloy
20. Seat Ring	Copper Alloy ASTM B584 Alloy C84400
21. Body	Cast Iron ASTM A126 Class B

¹ 2" and 10" have hex head steel capscrew.

² 2" thru 5" are Cast Copper Alloy ASTM B584 Alloy C84400

³ For (B) Disc, 2" thru 6" have Bronze ASTM B584 Alloy C84400 Disc.

⁴ 8" thru 10" have Iron Disc with Copper Alloy Disc Face Rings and Brass Pilots.

⁵ 2" thru 4" are Cast Copper Alloy ASTM B584 Alloy C84400.

⁶ 2" thru 8" have Aramid Fibers/Graphite packings. 10" has wire reinforced carbon yarn/resilient core with graphite and zinc finish.

**For PTFE Seat Valves Only.

NOTE: NIBCO may substitute Ductile Iron ASTM A395 (60-40-18) for ASTM A126 Class B Cast Iron for the Body, Bonnet, Wedge, or Disc. NIBCO may substitute Ductile Iron ASTM A395 (60-40-18) or ASTM A536 (65-45-12) for all other ASTM A126 Class B Cast Iron components.


DIMENSIONS—WEIGHTS—QUANTITIES

Size		Dimensions										Weight	
		A	B	C	D	E							
In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	Kg.
2	50	8.00	203	10.19	259	7	178	6.00	152	.63	16	32	15
2½	65	8.50	216	11.81	300	8	203	7.00	178	.69	17	49	22
3	80	9.50	241	12.50	318	8	203	7.50	191	.75	19	65	30
4	100	11.50	292	15.81	402	10	254	9.00	229	.94	24	98	44
5	125	13.00	330	16.50	419	10	254	10.00	254	.94	24	140	63
6	150	14.00	356	18.88	479	12	305	11.00	279	1.00	25	182	83
8	200	19.50	495	21.13	537	16	406	13.50	343	1.13	29	361	164
10	250	24.50	622	25.19	640	18	457	16.00	406	1.19	30	586	266

*With proper machining facilities.



F-718-B
Flanged

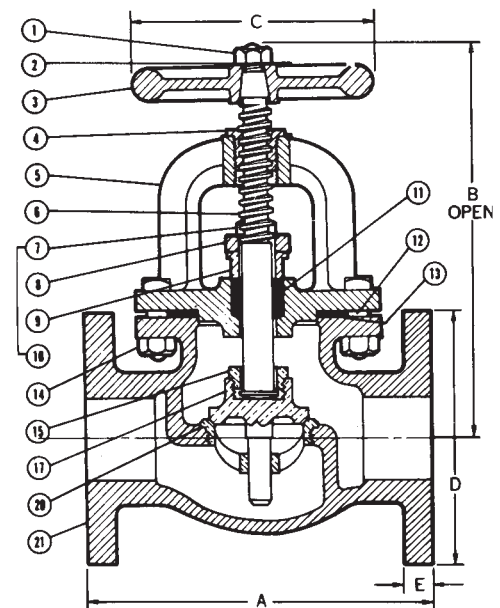

F-718-B
Flg x Flg

FREEZING WEATHER PRECAUTION: Subsequent to testing a piping system, valves should be left in an open position to allow complete drainage.

♦ For detailed Operating Pressure, refer to Pressure Temperature Chart on page 116.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Visit our website for the most current information.



Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.

P.O. Box 16620

LittleRock, AR 72231

Phone 501-834-3320

Fax 501-834-5416

Spec Section 230523, 2.7, A.

Bronze Ball Valves

Bronze Ball Valves

Two-Piece Body • Full Port • Stainless Trim • Blowout-Proof Stem • Vented Ball

600 PSI/41.4 bar non-shock cold working pressure
150 PSI/10.3 bar saturated steam*

CONFORMS TO MSS SP-110

MATERIAL LIST

PART	SPECIFICATION
1. Handle Nut	Stainless Steel 300 Series
2. Handle	Zinc Plated Steel Clear Chromate Plastisol Coated
3. Threaded Pack Gland	Brass ASTM B 16 Alloy C36000
4. Packing	PTFE
5. Stem	Stainless Steel ASTM A 276 Type 316
6. Thrust Washer	Reinforced PTFE
7. Ball (Vented)	Stainless Steel ASTM A 276 Type 316 or ASTM A 351 Type CF8M
8. Seat Ring (2)	Reinforced PTFE
9. Body	Bronze ASTM B 584 Alloy C84400
10. Body End Piece	Bronze ASTM B 584 Alloy C84400



¼" size only has a 304 stainless steel grounding washer.



T-585-70-66
Threaded



~~**S-585-70-66**~~
~~Solder~~

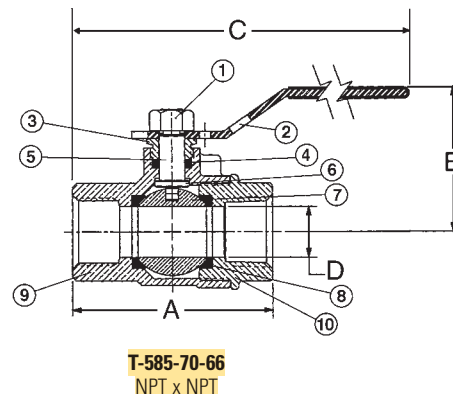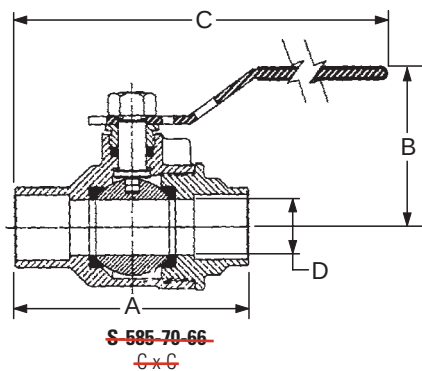

DIMENSIONS—WEIGHTS—QUANTITIES

Dimensions

<u>T-585-70-66</u>				<u>~~S-585-70-66~~</u>				<u>T-585-70-66</u>				<u>~~S-585-70-66~~</u>							
Size		A		A		B		C		C		D		<u>T-585-70-66</u>		<u>~~S-585-70-66~~</u>		Master Ctn.	Qty
In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	Kg.	Lbs.	Kg.		
¼	8	2.00	51	1.75	44	1.75	44	5.00	127	4.75	121	.38	10	.45	.21	.42	.19	100	
⅜	10	2.00	51	1.84	47	1.75	44	5.00	127	4.81	122	.38	10	.45	.21	.42	.19	100	
½	15	2.44	62	2.56	65	1.88	48	5.19	132	5.25	133	.50	13	.64	.29	.60	.27	100	
¾	20	2.94	75	3.25	82	2.25	57	6.25	159	6.25	159	.75	19	1.33	.60	1.27	.58	50	
1	25	3.34	85	3.75	95	2.38	60	6.44	164	6.63	168	1.00	25	1.79	.81	1.72	.78	40	
1¼	32	4.19	106	5.06	128	3.00	76	6.75	171	7.19	183	1.25	32	3.34	1.52	3.40	1.55	20	
1½	40	4.72	120	5.99	151	3.16	80	9.06	230	9.69	246	1.50	38	4.84	2.20	5.18	2.35	10	
2	50	5.16	131	6.72	170	3.50	89	9.25	235	10.06	256	2.00	51	7.41	3.37	7.83	3.56	8	

Note: solder end is designed to be soft-soldered into lines using solders with the melting point not exceeding 500°F. Higher temperature solders will damage the seat material. See installation sheet packaged with valves.

*For detailed operating pressure, refer to pressure temperature chart on page 41.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

**LEAD FREE*
OPTION
AVAILABLE**

**OXYGEN
SERVICE
OPTION
AVAILABLE**

Visit our website for the most current information.

*Weighted average lead content ≤ 0.25%



Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.

P.O. Box 16620

LittleRock, AR 72231

Phone 501-834-3320

Fax 501-834-5416

Spec Section 230523, 2.8, A.

Iron Single-Flange Butterfly Valves

200 PSI Butterfly Valves

Cast Iron Body • Extended Neck • Cartridge Seat Liner* • Lug Style

Sizes 2" through 12"

Install between Std. ASME Class 125/150 flanges†.
Bi-directional dead end service rating without a downstream flange required: 2"-6" 200 PSI, 8" 150 PSI, 10"-12" 100 PSI.

THIRD PARTY CERTIFIED BY QAI TO MEET MSS SP-67 STANDARD

MATERIAL LIST

PART	SPECIFICATION
1. Body	Cast Iron, Epoxy coated ASTM A126 CL.B
2. Body Bushing	Bronze ASTM B584 Grade C83600
3. Liner	EPDM Rubber w/Phenolic Backing Buna-N Rubber Nitrile w/Phenolic Backing
4. Stem	Stainless Steel ASTM A582 Type 416
5. Disc	Alum. Brz. ASTM B148 Alloy C95400 Ductile Iron ASTM A536 Grade 65-45-12 (plated)
6. Taper Pin (2 pin 6" - 12")	Stainless Steel ASTM A582 Type 416
7. Name Plate	Aluminum
8. Shaft Bushing	Bronze ASTM B584 Grade C83600
9. Stem Seal	Buna-N Rubber Nitrile
10. Retainer Plate	ASTM A570 GR33 Galvanized
11. Bolts M6	ASTM A570 GR33 Galvanized

DIMENSIONS — WEIGHTS

Size	A	Min.	B	C	G	H	I			
In. mm.	Dia.	Pipe I.D.	Dia.	Dia.	D	E	F	Body	Seat	Dia.
2 50	2.08	1.38	3.00	3.94	6.34	1.26	10.75	1.655	1.81	0.496
2 1/2 65	2.54	1.95	3.50	4.72	6.89	1.26	11.65	1.759	1.93	0.496
3 80	3.10	2.66	4.09	5.00	7.13	1.26	12.12	1.780	1.93	0.496
4 100	4.10	3.67	5.32	6.14	7.87	1.26	13.62	2.050	2.18	0.621
5 125	4.85	4.48	6.26	7.48	8.39	1.26	14.65	2.140	2.31	0.745
6 150	6.12	5.84	7.42	8.35	8.90	1.26	15.62	2.195	2.33	0.745
8 200	7.97	7.85	9.38	10.55	10.24	1.77	18.88	2.385	2.52	0.870
10 250	9.86	9.76	11.51	12.79	11.50	1.77	21.26	2.584	2.83	1.120
12 300	11.87	11.72	13.55	15.87	13.27	1.77	24.57	3.029	3.19	1.244

Size	J	K	L	M	R	Q	T	Lug Weight		
In. mm.	Dia.	B.C. Dia.	Dia.	Dia.	Dia.	P	Flats	Lbs.	Kg.	
2 50	3.00	1.97	0.28	0.75	4.75	4	5/8-11UNC	.350	8.6	3.9
2 1/2 65	3.03	1.97	0.28	0.75	5.50	4	5/8-11UNC	.350	10.8	4.9
3 80	3.03	1.97	0.28	0.75	6.00	4	5/8-11UNC	.350	11.4	5.2
4 100	3.62	2.76	0.39	0.75	7.50	8	5/8-11UNC	.437	18.9	8.6
5 125	3.62	2.76	0.39	0.88	8.50	8	3/4-10UNC	.500	22.8	10.4
6 150	3.62	2.76	0.39	0.88	9.50	8	3/4-10UNC	.500	27.1	12.3
8 200	4.50	4.02	0.47	0.88	11.75	8	3/4-10UNC	.625	41.2	18.7
10 250	4.50	4.02	0.47	1.00	14.25	12	7/8-9UNC	.812	56.3	25.9
12 300	5.50	4.02	0.47	1.00	17.00	12	7/8-9UNC	.875	90.3	41.0

* Note: refer to NIBCO O & M manual for specified installation instructions for optimal performance of cartridge seat valves

† Note: lug style valves- extra care should be used when installing with raised face flanges. Over-tightening can result in broken lugs.

N-200235

Lug Style
EPDM Liner
Aluminum Bronze Disc

N-200236


Lug Style
EPDM Liner
Ductile Iron Disc

N-200245

Lug Style
Buna Liner
Aluminum Bronze Disc

N-200246

Lug Style
Buna Liner
Ductile Iron Disc

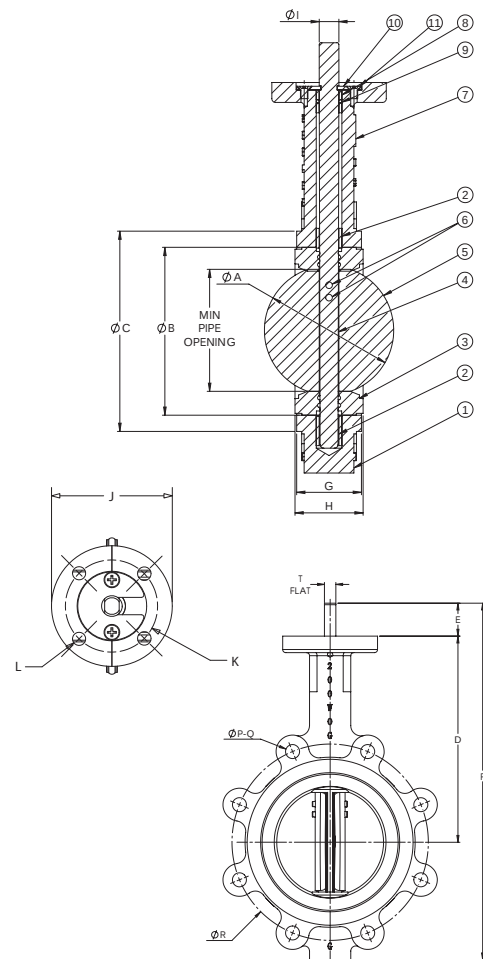

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

NOT RECOMMENDED
FOR STEAM SERVICE

Visit our website for the most current information.



Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.

P.O. Box 16620

LittleRock, AR 72231

Phone 501-834-3320

Fax 501-834-5416

Spec Section 230523, 2.10, A.

Bronze Swing Check Valves

Class 125 Bronze Check Valves

Horizontal Swing • Regrinding Type • Y-Pattern • Renewable Seat and Disc

125 PSI/8.6 Bar Saturated Steam to 353°F/178°C

200 PSI/13.8 Bar Non-Shock Cold Working Pressure

CONFORMS TO MSS SP-80

MATERIAL LIST

PART	SPECIFICATION
1. Bonnet	Bronze ASTM B 62 C83600
2. Body	Bronze ASTM B 62 C83600
3. Hinge Pin	ASTM A276 S30400 or S31600
4. Disc Hanger	Bronze ASTM B 62 C83600 or MPIF SS-316NI-25
5. Hanger Nut	Bronze ASTM B 16 C36000
6. Disc Holder	Bronze ASTM B 62 C83600
7. Seat Disc	Petroleum or Water (Buna-N) (W) Steam (PTFE) (Y) Bronze ASTM (B) FKM (V) B 62 C83600
8. Seat Disc Nut	Bronze ASTM B 16 C36000 or B 96 C65100
9. Hinge Pin Plug	Bronze ASTM B 140 Alloy C31400 or B 16 C36000 (not shown)
10. Seat Disc Washer*	ASTM F594 S30400 or S31600


*Sizes 1", 1 1/4", 1 1/2" and 2" only.




T-413
Threaded




S-413
Solder

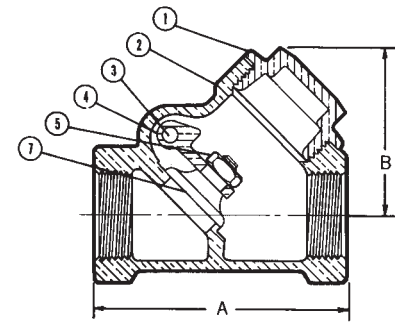

T-413-B
NPT x NPT

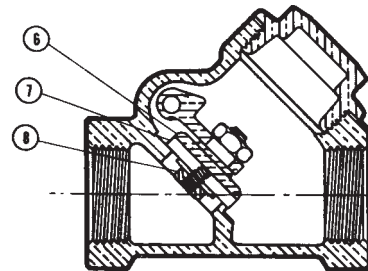

T-413-Y
NPT x NPT

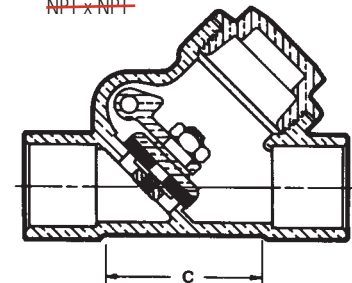

S-413-W
6 x 6

DIMENSIONS—WEIGHTS—QUANTITIES

Dimensions													
Size		A		B		C		T-413		~~S-413~~		Master Ctn. Qty	
In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	Kg.	Lbs.	Kg.		
1/4	8	2.13	54	1.63	41	1.38	35	0.50	0.23	0.51	0.23	50	
3/8	10	2.13	54	1.63	41	1.31	33	0.47	0.22	0.48	0.22	50	
1/2	15	2.44	62	1.69	43	1.50	38	0.55	0.25	0.55	0.25	50	
3/4	20	2.94	75	1.88	48	1.88	48	0.90	0.41	0.88	0.40	10	
1	25	3.56	90	2.31	59	2.25	57	1.46	0.66	1.48	0.67	5	
1 1/4	32	4.19	106	2.69	68	2.75	70	2.17	0.99	2.22	1.01	20	
1 1/2	40	4.50	114	2.94	75	3.11	79	2.95	1.34	3.00	1.36	10	
2	50	5.25	133	3.94	100	3.75	95	4.79	2.17	4.87	2.21	10	
2 1/2*	65	8.00	203	5.06	129	5.06	129	11.48	5.21	10.48	4.76	5	
3*	80	9.25	235	6.25	159	6.25	159	17.53	7.96	15.29	6.94	4	

Ordering: T-413 and S-413 normally furnished with **Bronze Disc (T-413-B) or (S-413-B)**.
Both available with PTFE Steam Disc (T-413-Y), (S-413-Y), or CWP Disc (T-413-W), (S-413-W) or 300° F 67 PSI steam FKM Disc (T-413-V).

*Class 150 (433) furnished for these sizes.

Install 5 pipe diameters minimum downstream from pump discharge or changes in direction to avoid flow turbulence. Flow straighteners may be required in extreme cases.

Note: On pump discharge, the preferred check valves are: inline, spring assisted, center-guided, lift checks.

NIBCO® Check Valves may be installed in both horizontal and vertical lines with upward flow or in any intermediate position. They will operate satisfactorily in a declining plane (no more than 15°).

Warning – Do Not Use For Reciprocating Air Compressor Service.

♦ For detailed Operating Pressure, refer to Pressure Temperature Chart on page 116.

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Visit our website for the most current information.



Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.

P.O. Box 16620

LittleRock, AR 72231

Phone 501-834-3320

Fax 501-834-5416

Spec Section 230523, 2.11, A.

Iron Flanged-End Swing Check Valves

Class 125 Iron Body Check Valves

Bolted Bonnet • Horizontal Swing • Renewable Seat and Disc*

200 PSI/13.8 bar non-shock cold working pressure to -20°F to 150°F/-29°C to 66°C*

Maximum working temperature 450°F/232°C at 125 PSI/8.6 bar

125 PSI/8.6 bar saturated steam to 353°F/178°C

CONFORMS TO MSS SP-71 TYPE 1

MATERIAL LIST

PART	SPECIFICATION
1. Body Bolt	Steel ASTM A307
2. Identification Plate	Aluminum
3. Bonnet	Cast Iron ASTM A126 Class B
4. Body Gasket	Graphite/SST
5. Body Nut	Steel ASTM A563
6. Side Plug	Brass ASTM B16 Alloy C36000
7. Hanger Pin	Brass ASTM B16 Alloy C36000
8. Hanger	Ductile Iron ASTM A536
9. ¹ Disc	Brass ASTM B584 Alloy C84400 or ASTM A536 Ductile Iron with Brass Face Ring
10. Seat Ring	Brass ASTM B584 Alloy C84400
11. Disc Nut	Brass ASTM B16 Alloy C36000
12. Body	Cast Iron ASTM A126 Class B
13. ¹ Disc Bolt	Brass ASTM B16 Alloy C36000
14. Disc Plate**	Cast Iron ASTM A126 Class B
15. Disc Cage**	Cast Iron ASTM A126 Class B

¹2" thru 4" have Bronze ASTM B584 Disc.

5" thru 12" have Iron Disc with Bronze Disc Face Rings and Disc Bolt.

**These items are not in the -B, only the -W and -Y.

NOTE: NIBCO may substitute Ductile Iron ASTM A395 (60-40-18) for ASTM A126 Class B Cast Iron for the Body, Bonnet, Wedge, or Disc. NIBCO may substitute Ductile Iron ASTM A395 (60-40-18) or ASTM A536 (65-45-12) for all other ASTM A126 Class B Cast Iron components.

DIMENSIONS—WEIGHTS—QUANTITIES

Dimensions															
Size		F-918-B		~~T-918-B~~		B		D		E		F-918-B		~~T-918-B~~	
		A		A								Lbs. Kg.		~~Lbs. Kg.~~	
In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	Kg.	Lbs.	Kg.
2	50	8.00	203	6.50	165	3.94	100	6.00	152	.63	16	24	11	15	7
2½	65	8.50	216	7.50	191	4.50	114	7.00	178	.69	17	35	16	26	12
3	80	9.50	241	8.00	203	5.13	130	7.50	191	.75	19	47	21	31	14
4	100	11.50	292	9.38	238	6.13	156	9.00	229	.94	24	80	36	54	24
5	125	13.00	330	x	x	6.81	173	10.00	254	.94	24	100	45	80	36
6	150	14.00	356	x	x	8.00	203	11.00	279	1.00	25	146	66	121	54
8	200	19.50	495	x	x	9.44	240	13.50	343	1.13	29	274	124	x	x
10	250	24.50	622	x	x	12.06	306	16.00	406	1.19	30	426	193	x	x
12	300	27.50	699	x	x	16.13	410	19.00	483	1.25	32	675	306	x	x

Note: On pump discharge, the preferred check valves are:
- inline, spring assisted, center-guided, lift checks
- spring assisted twin (double) disc
- swing design with lever and weight or lever and spring

*Proper machining facilities required.

2½" thru 12" are available with lever and weight or lever and spring.

Install 5 pipe diameters minimum downstream from pump discharge or changes in direction to avoid flow turbulence. Flow straighteners may be required in extreme cases.

NIBCO Iron Body Check Valves may be installed in both horizontal and vertical lines with upward flow or in any intermediate position.

Warning – Do Not Use For Reciprocating Air Compressor Service.

Warning: Swing checks are not recommended for vertical installation in NPS 4 or larger.

♦ For detailed Operating Pressure, refer to Pressure Temperature Chart on page 116.


Visit our website for the most current information.




F-918-B
Flanged



T-918-B
Threaded

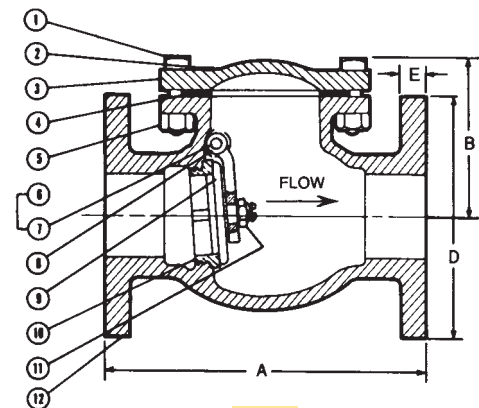

F-918-B
Flg x Flg

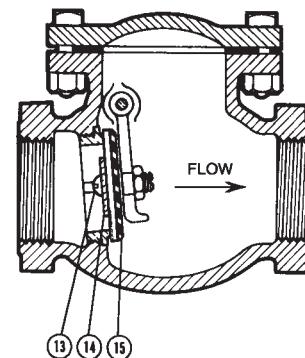

T-918-B
NPT x NPT
Buna-N Disc Shown



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.