

GENERAL SHEET NOTES


1. All 20A BRANCH CIRCUITS SUPPLYING OUTLETS IN DORM ROOMS ARE REQUIRED TO BE AFCI PROTECTED PER NEC 210.12(C)

KEYED NOTES

E3 ADVANCED UTILITY METER SHALL COMPLY WITH
USAF COINE STANDARDS AND SHALL CONNECT VIA
NIPR CAT 6A CABLE TO FACILITY COMMUNICATION
SYSTEM. WATER AND GAS METERS SHALL CONNECT
TO COINE COMB UTILITY METER VIA
KYZ PULSE TRANDCUSERS. NEW METER SHALL
COMMUNICATE WITH THE EXISTING LRAF6
ADVANCED METER READING SYSTEM.

E6 RECEPTACLE ADJACENT TO DOOR TO BE DEDICATED
FOR PORTABLE AIR CONDITIONING UNIT.

E8 REFER TO RISER DIAGRAM SHEET E-601.

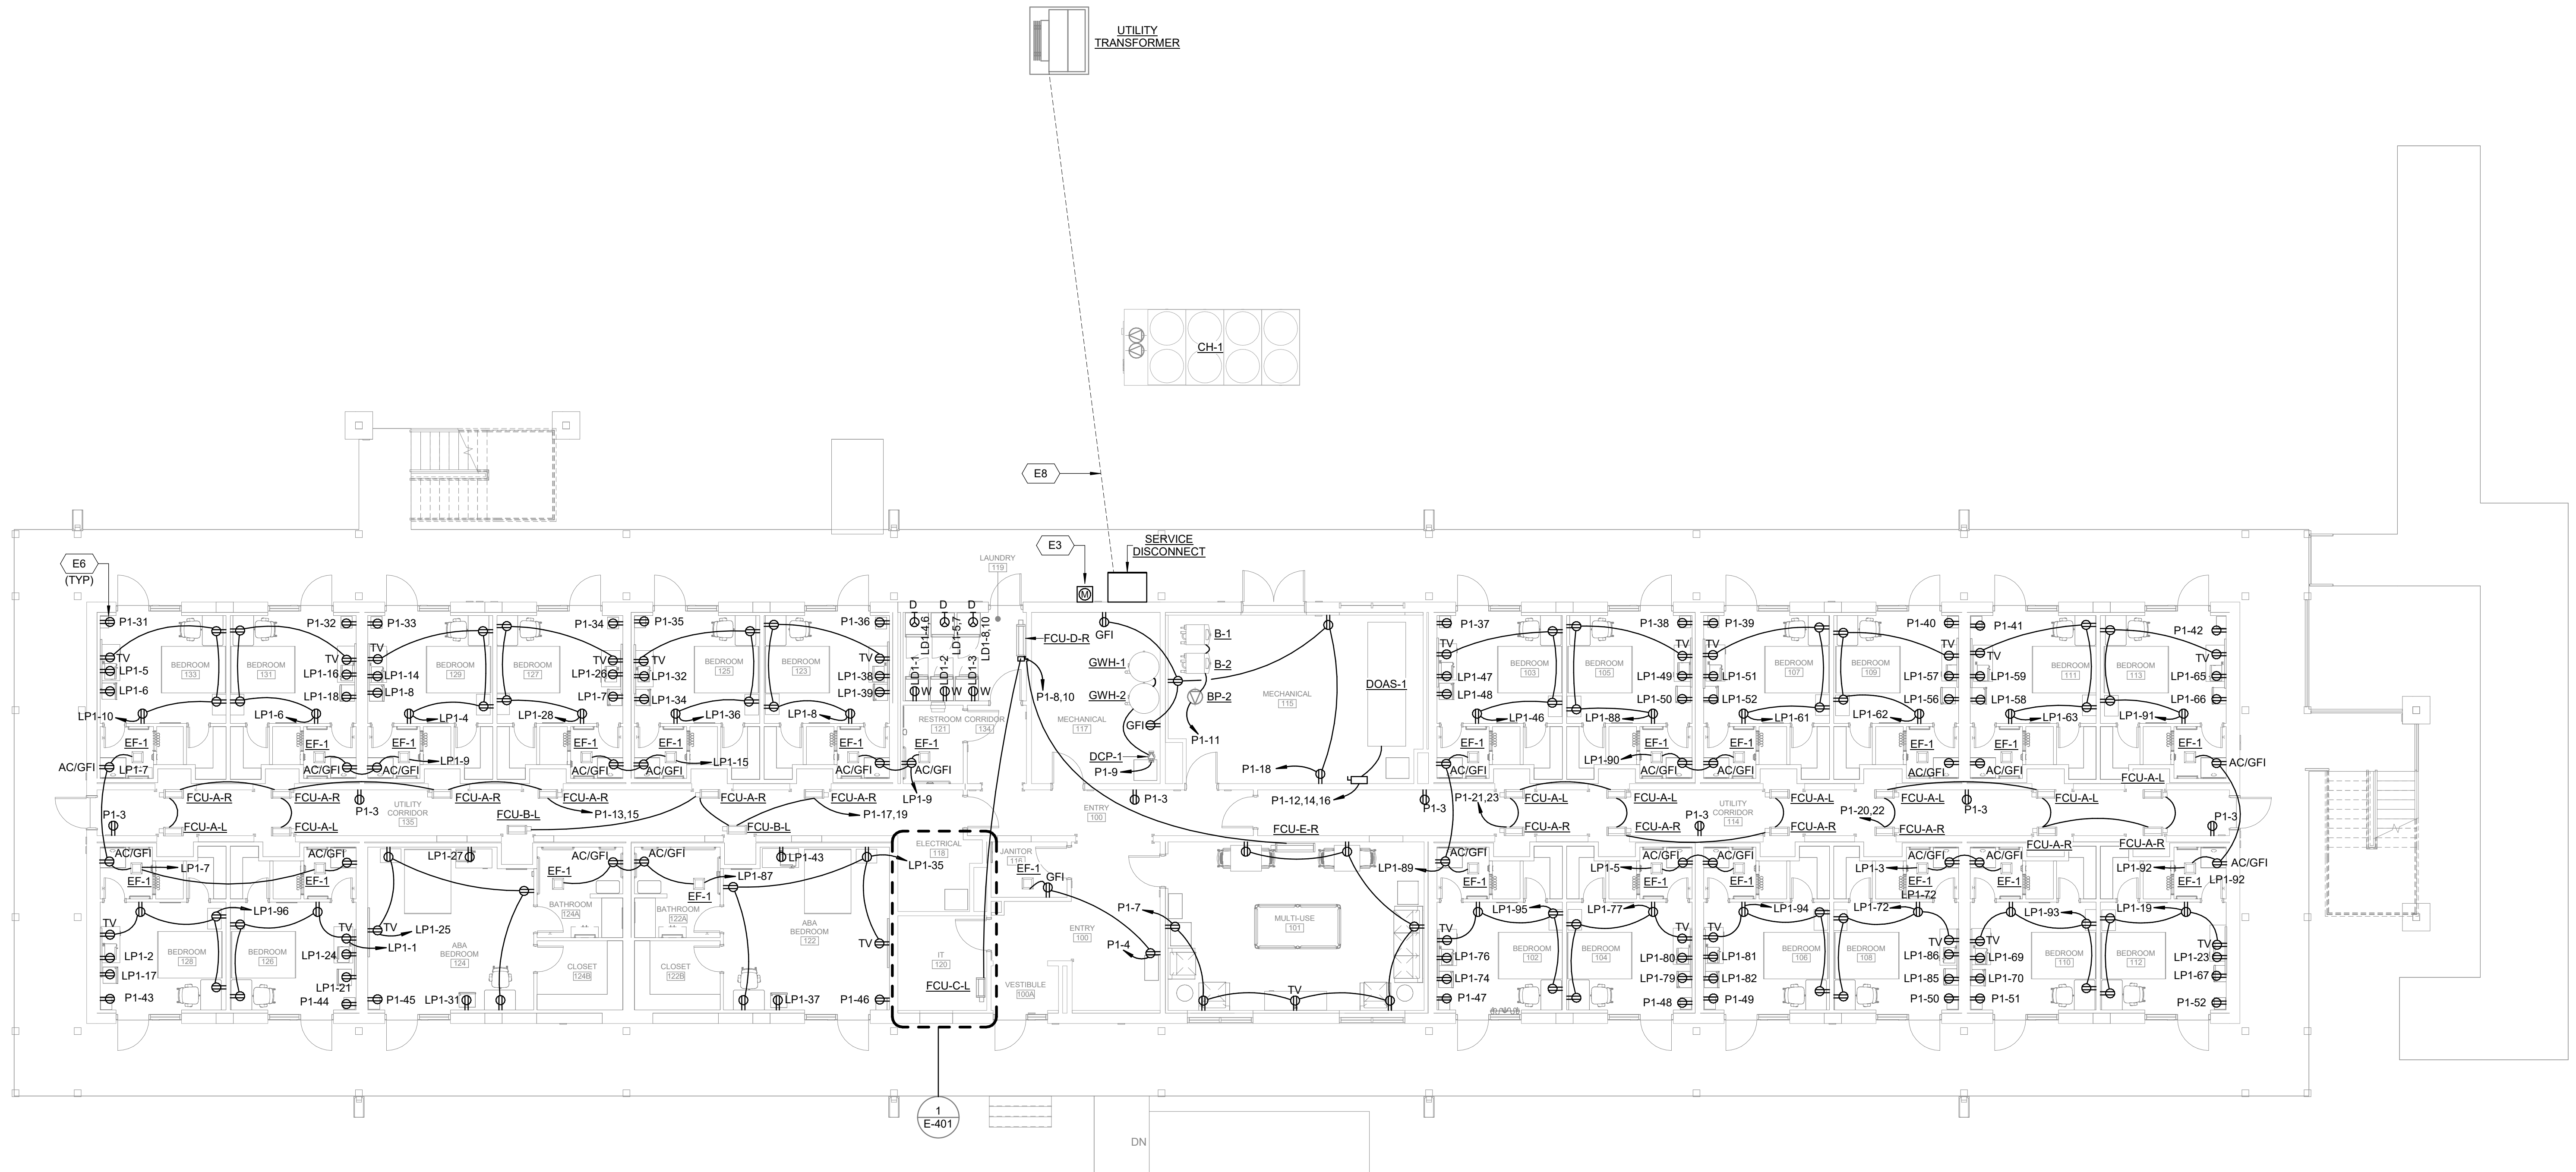


APPROVED	REV #	DATE	DESCRIPTION	APP'D
CHIEF ENGINEER				
APPROVED				
CIVIL ENGINEER				

NKAK 22-1076
B718 DORM
LITTLE ROCK AFB

DETAILS (1)

LEVEL ONE POWER
FLOOR PLAN

AIR MOBILITY COMMAND
19TH CIVIL ENGINEER SQUADRON
LITTLE ROCK, ARKANSAS



DATE:	JULY 2026
DESIGNED	
BY:	JLS
DRAWN	
BY:	MUC
BUILDING	
NO.:	
PROJECT	
NO.:	
SHEET	
REF.:	
E-101	
SHEET	
NO.:	1 OF XX

STATUS:65% PRELIMINARY DESIGN