

TYP. SEISMIC JOINT CLIP - CROSS TEE. SPACE PER MFR. RECOMMENDATION. RE: A2.10 & A2.11 3 HEAT LAMP LIGHT FIXTURES IN THE T.R.U & SWEET STREET. COORDINATE DISTANCE FROM BOTTOM OF HEAT LAMP SHADES TO TOP OF COUNTERTOP W/ BUC-EE'S REP. IN THE FIELD. 4 TV MONITOR TYPICAL RE: ELECTRICAL 5 3" CONT. METAL SOFFIT VENT @ WALLS. RE: 9 / A7.00 6 WALK-IN COOLER/FREEZER LIGHTS. RE: ELEC DRAWINGS. 7 10' LONG SUSPENDED SIGN. VERIFY MOUNTING HEIGHT & FINAL LOCATION WITH OWNER. 8 'LONG SUSPENDED SIGN. VERIFY MOUNTING HEIGHT & FINAL LOCATION WITH OWNER. 9 SIGN SUSPENSION CABLE LOCATIONS. PROVIDE GROMMET. RE: 13 / A7.01 FOR CABLE ANCHORING. 10 SIGNAGE HANGER BRACING ABOVE CEILING. RE: STRUCTURAL. 11 DASHED LINE INDICATES PROPOSED LAY-IN CEILING MAIN BEAM LOCATIONS. 12 BLUE DASHED LINE INDICATES UNATTACHED WALLS. RE: DETAILS ON A2.10 & A2.11 13 RED SOLID LINE INDICATES ATTACHED WALLS. RE: DETAILS ON A2.10 & A2.11

NOT ALL NOTES ARE USED ON THIS SHEET

RCP KEYED NOTES

ALL DIMENSIONS ARE FROM FACE OF FINISH TO FACE OF FINISH, BEGINNING POINT OF CLG. GRID, OR TO CENTERLINE OF LIGHT FIXTURE U. N. O. REFLECTED CEILING PLAN INDICATES PROPOSED LAYOUTS OF CEILING MATERIALS. RE: MEP DRAWINGS FOR ADDITIONAL INFORMATION ON CEILING FIXTURES/EQUIPMENT NOT SHOWN. ALL CEILING PENETRATIONS SUCH AS, BUT NOT LIMITED TO, LIGHT FIXTURES,


RE: MEP DRAWINGS FOR ADDITIONAL INFORMATION ON CEILING
FIXTURES/EQUIPMENT NOT SHOWN.
ALL CEILING PENETRATIONS SUCH AS, BUT NOT LIMITED TO, LIGHT FIXTURES,
SPRINKLER HEADS, MECH. GRILLES/DIFFUSERS, & EXIT SIGNS SHALL BE CENTERED ON
CEILING TILE. COORDINATE WITH BUC-EE'S PROJECT MANAGER.
DIMENSIONS, DETAILS, NOTES, ETC. INDICATED FOR CEILING LAYOUT SHALL BE
SYMMETRICAL U.N.O.
LIGHT FIXTURE LOCATIONS ARE CRITICAL AND SHALL BE COORDINATED WITH
DUCTWORK AND MECHANICAL EQUIPMENT ABOVE CEILING.
RE: ENLARGED RCP PLANS FOR CEILING HEIGHTS.
LATERAL FORCE BRACING IS REQUIRED FOR ALL CEILING AREAS GREATER THAN 1000


SQUARE FEET.

9. ALL CEILING BRACING SHALL BE SPACED 12 FEET ON CENTER, MAXIMUM, IN BOTH DIRECTIONS WITH THE FIRST POINT WITHIN 6 FEET, MAXIMUM, FROM EACH WALL.

10. BRACING SHALL BE PLACED A MINIMUM OF 6 FEET FROM ANY PIPES, DUCTS, OR EQUIPMENT NOT PROVIDED WITH BRACING RESTRAINTS FOR HORIZONTAL FORCES.

11. BRACING SHALL BE ATTACHED TO THE CEILING GRID IN SUCH A MANNER THAT THEY CAN SUPPORT A LOAD OF NOT LESS THAN 200 LBS OR TWO TIMES THE ACTUAL DESIGN LOAD, WHICHEVER IS GREATER.

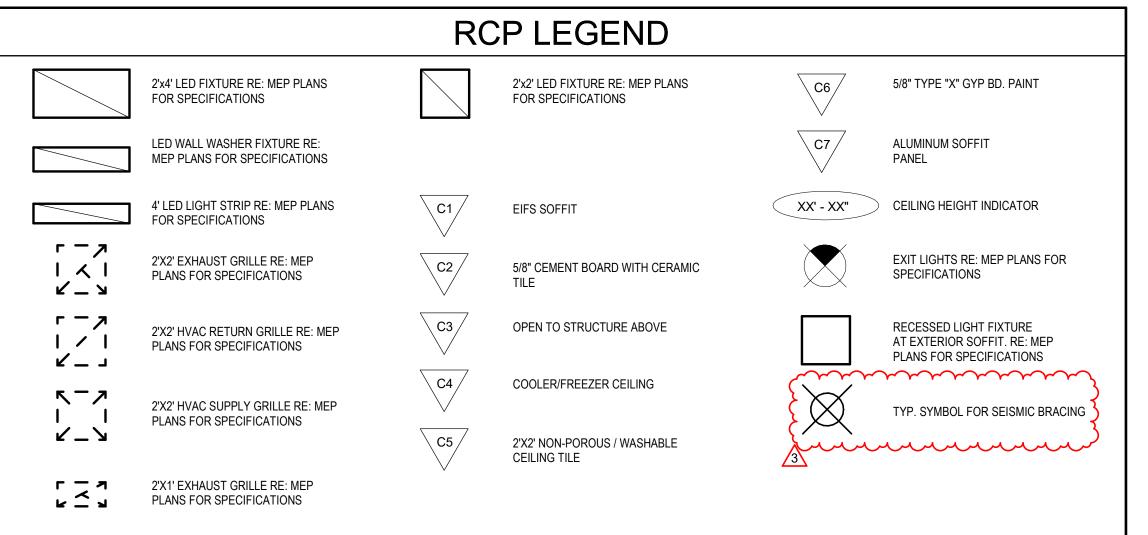

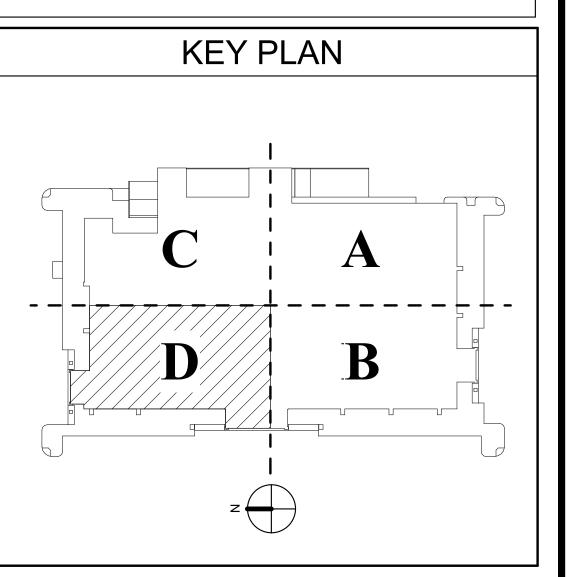



A DEVELOPMENT C

Buc-ee's Benton, LLC Saline County, Arkansas

TEL: (979) 230-2920

JG-EE'S TRAVEL CENTER BENTON, ARKANSAS

LAWRENCE S. LEVINSON, A.I.A.

No. D		
	ESCRIPTION	DATE
3 O	WNER CHANGES	04/23/202



04/23/2025

ISSUED FOR REVIEW:	04/26/2024
ISSUED FOR BID:	05/14/2024
ISSUED FOR PERMIT:	05/14/2024
Copyright 2024 Lawrence S. Levinson, AIA., Warning: The Copyright Law Under Section 102 of the U.S. Copyright a Protection Act of 1990. Unauthorized reproduction and diportion of it, other than for use of this particular project, is civil and criminal penalties, and will prosecuted to maxim	and the Architectural Works Copyright istribution of this document or any spohibited and may result in severe

A2.04

REFLECTED CEILING PLAN AREA D

LAARC PROJECT NUMBER: 2024-107.000

BENTON, ARKANSAS