



Z:\20\2020043 ROGERS SOLIDS HANDLING IMPROVEMENTS, PH 2\DRAWINGS\CONSTRUCTION DRAWINGS\WIP\D-02.DWG, 8/26/2024 11:12 AM, MATT WEIR, LAYOUT

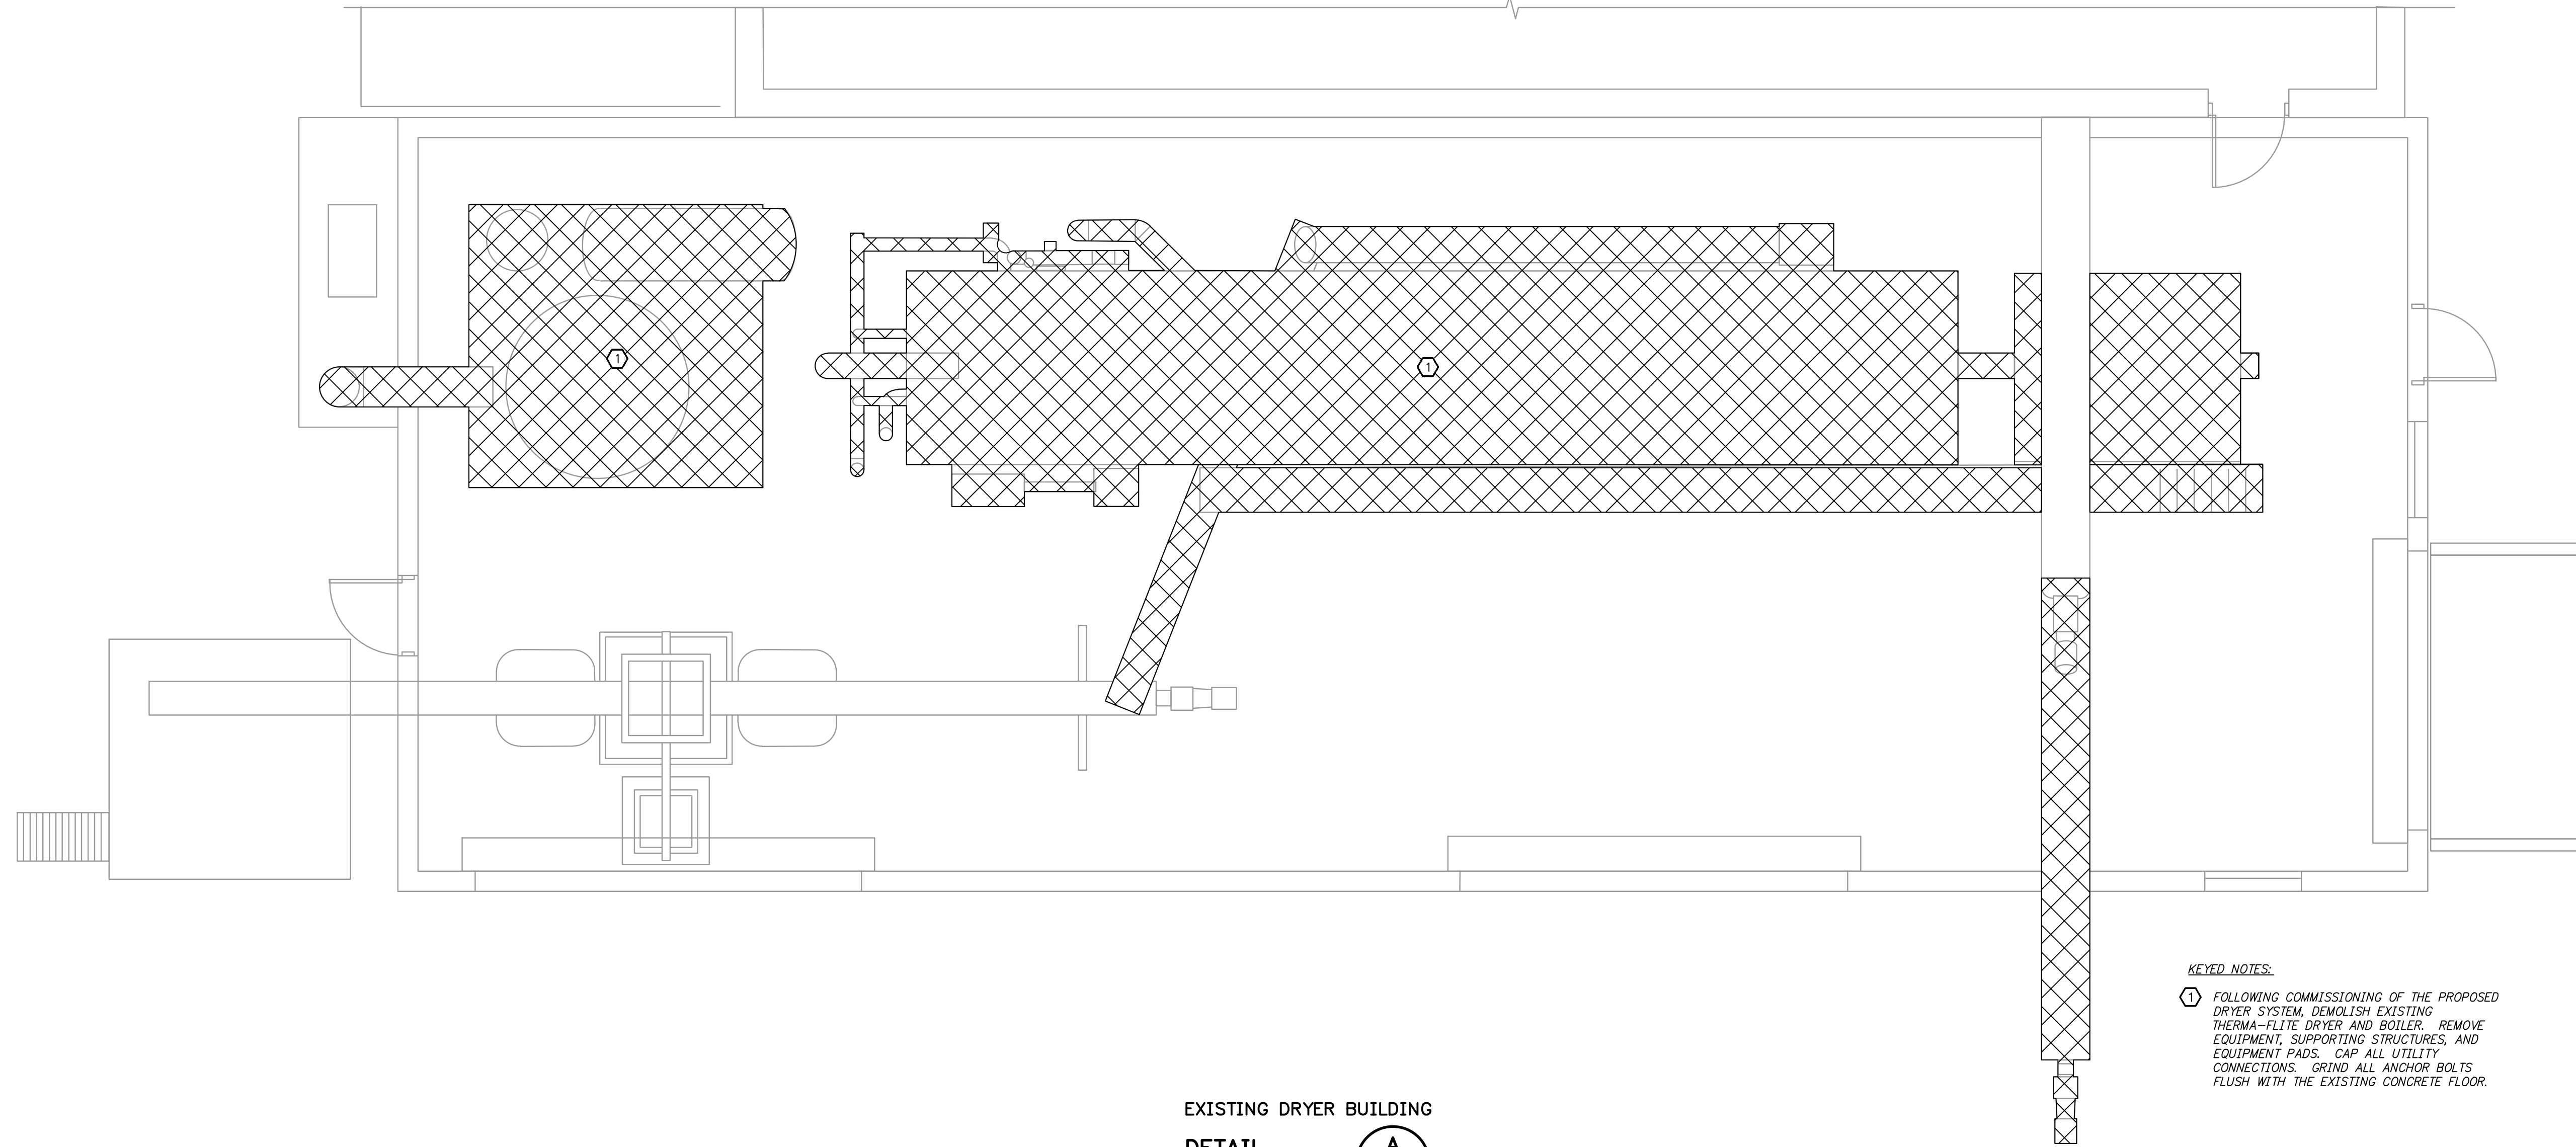

1"
ONE INCH
AT FULL SIZE
IF NOT ONE INCH
SCALE ACCORDINGLY

REVISION	DATE

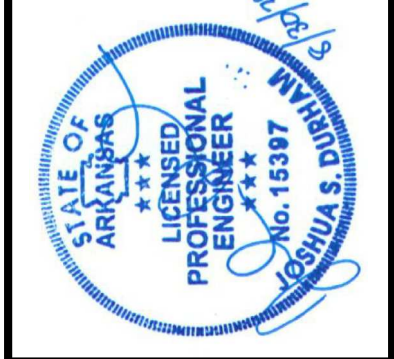

HW HAWKINS WEIR ENGINEERS, INC.
RV BLACK & VEATCH

EXISTING DRYER BUILDING
DETAIL A
1/4"=1'-0"

KEYED NOTES:
① FOLLOWING COMMISSIONING OF THE PROPOSED DRYER SYSTEM, DEMOLISH EXISTING THERMA-FLITE DRYER AND BOILER. REMOVE EQUIPMENT, SUPPORTING STRUCTURES, AND EQUIPMENT PADS. CAP ALL UTILITY CONNECTIONS. GRIND ALL ANCHOR BOLTS FLUSH WITH THE EXISTING CONCRETE FLOOR.

ROGERS, ARKANSAS
ROGERS POLLUTION CONTROL FACILITY (PCF)
SOLIDS HANDLING IMPROVEMENTS, PHASE II
DEMOLITION
EXISTING DRYER EQUIPMENT
DETAIL
FOR: ROGERS WATER UTILITIES

DATE: AUGUST 2024
SCALE: AS SHOWN
DESIGNED BY: JSD
DRAWN BY: MAW
HWEI NO.: 2020043
FILENAME: D-02

SHEET NO.
D-2

© HAWKINS-WEIR ENGINEERS, INC. 2024