



1 FIRST FLOOR DEMOLITION PLAN.
1/8" = 1'-0"

2 SECOND FLOOR DEMOLITION PLAN.
1/8" = 1'-0"

GENERAL NOTES:

- UNLESS NOTED OTHERWISE, DIMENSIONS ARE TO COLUMN CENTER LINE, CENTER LINE OF STUD PARTITIONS, FACE OF MASONRY AND CONCRETE WALLS AND FACE OF EXISTING WALLS.
- NEW WORK EXTENDING EXISTING CONDITIONS SHALL ALIGN WITH AND MATCH EXISTING WORK EXCEPT WHERE OTHERWISE DIMENSIONED OR DETAILED.
- THE CONTRACTOR WHOSE WORK REQUIRES THE CUTTING OF EXISTING CONSTRUCTION AND FINISHES SHALL BE RESPONSIBLE FOR THE REPAIR OF SUCH CONSTRUCTION AND FINISHES. THE REPAIR SHALL BE PERFORMED BY TRADES PEOPLE WHO ARE BY TRAINING AND EXPERIENCE QUALIFIED TO MAKE SUCH REPAIRS.
- ALL PENETRATIONS THROUGH FLOOR SLABS AND WALLS, SUCH AS PIPING, CONDUITS, DUCTS, PNEUMATIC TUBES, ETC., SHALL BE PACKED AND SEALED OFF WITH FIRE RATED MATERIAL WHERE APPLICABLE AND SEALED AGAINST WATER PENETRATION.
- SHOULD THE CONTRACTOR ENCOUNTER ANY MATERIAL IDENTIFIED AS ASBESTOS, OR SUSPECT OF CONTAINING ASBESTOS FIBERS, HE SHALL IMMEDIATELY REFER TO THE GENERAL REQUIREMENTS AND INITIATE THE PROCEDURES SET FORTH THEREIN.
- REMOVE ORGANIC MATERIAL AS NEEDED FOR NEW CONSTRUCTION.

TYPICAL DEMOLITION NOTES:

- ALL DEMOLITION WORK SHALL BE PERFORMED WITH "DUE CARE AND DILIGENCE" SO AS TO PREVENT THE ARBITRARY DESTRUCTION OR INTERRUPTION OF CONCEALED UTILITIES WHICH ARE INTENDED TO REMAIN IN USE AND THE ROUTING OF WHICH COULD NOT BE PREDETERMINED UNTIL DEMOLITION WAS STARTED. ALL SUCH DISCOVERIES OF UTILITIES DURING THE DEMOLITION PROCESS WHICH ARE IN A LOCATION DIFFERENT FROM THAT INDICATED, CHANGE DIRECTION FROM FLOOR TO FLOOR, ETC., OR ARE UNIDENTIFIED, SHALL BE REPORTED TO THE ARCHITECT BEFORE REMOVAL FOR FINAL DISPOSITION.
- REMOVE ALL CONSTRUCTION DESIGNATED TO BE REMOVED AND CLEAR TO RECEIVE NEW WORK AS HEREIN INDICATED.
- WHEREVER EXISTING EQUIPMENT, PIPING, DUCTS, ETC., ARE REQUIRED TO BE REMOVED, SUCH REMOVAL SHALL INCLUDE ALL ANCHORS, HANGARS, FOUNDATIONS, ETC. AFTER REMOVAL, AFFECTED CONSTRUCTION AND SURFACES SUCH AS FLOORS, WALLS, BASES, AND CEILINGS SHALL BE FINISHED TO MATCH ADJACENT SURFACES UNLESS OTHERWISE NOTED.
- ALL FURNISHINGS AND EQUIPMENT, SUCH AS SHELVING, CABINETS, PLUMBING FIXTURES, ELECTRICAL FIXTURES AND EQUIPMENT, AUDIO-VISUAL EQUIPMENT, PERFORMANCE EQUIPMENT, MUSICAL INSTRUMENTS, STAGE PLATFORM EQUIPMENT, MECHANICAL EQUIPMENT, AIR CONDITIONER UNITS, ETC., REMOVED SHALL BE TURNED OVER TO THE OWNER OR STORED AS DIRECTED OTHERWISE.
- ALL DOORS, FRAMES, AND HARDWARE THAT ARE REMOVED AND NOT RELOCATED SHALL BE PROTECTED AND TURNED OVER TO THE OWNER OR STORED AS DIRECTED OTHERWISE.
- WITHIN ALL AREAS OF RENOVATION, PATCH AND REPAIR EXISTING GWB IN ITS ENTIRETY AS REQUIRED.
- WITHIN ALL AREAS OF RENOVATION PAINT EXISTING GWB PARTITIONS AND GWB CEILINGS IN THEIR ENTIRETY.
- FOR ANY PAINTED SURFACE THAT REQUIRES PATCHING, THE ENTIRE SURFACE MUST BE REPAINTED TO THE NEAREST INTERSECTING MATERIAL OR CORNER.
- WITHIN ALL AREAS OF RENOVATION, PATCH AND REPAIR EXISTING CONCRETE SLAB ON GRADE AS REQUIRED FOR NEW CONSTRUCTION. THIS INCLUDES BUT IS NOT LIMITED TO AREAS WHERE EXISTING FLOOR DRAINS AND FLOOR SINKS ARE REMOVED.

DEMOLITION LEGEND

- EXISTING PARTITION TO REMAIN
- EXISTING PARTITION TO BE REMOVED
- EXISTING DOOR TO BE REMOVED
- EXISTING ITEM TO BE REMOVED AS NOTED

CALVARY CHURCH
CALVARY CHURCH FACILITY ADDITION
BENTONVILLE, AR

-PROGRESS PRINT-
NOT FOR
CONSTRUCTION
FOR PRICING AND
REVIEW

Revisions
No. Description Date


Project Number
21010

Date
02/19/2026


FIRST & SECOND
FLOOR
DEMOLITION PLAN

PH2.00

DOOR SCHEDULE																							
Room Number	Mark Sub	Single / Pair	Door Type	Overall Door Width	Door Panel 1 Width	Door Panel 2 Width	Door Height	Door Thickness	Door Material	Door Finish	GLAZING		Frame Type	Frame Material	Frame Finish	Head Detail	Jamb Detail	Sill Detail	Fire Rating	STC Rating	Room Number	Mark Sub	Comments
											Glazing Material	Glazing Thickness											
EXISTING BUILDING FIRST FLOOR																							
E122	A	PAIR	F	6'-0"	3'-0"	3'-0"	7'-0"	1 3/4"	SCW	-	-	-	F1	HM	PAINT						E122	A	
E122	B	SINGLE	F	3'-0"	3'-0"	0"	7'-0"	1 3/4"	SCW	-	-	-	F1	HM	PAINT						E122	B	
E122	C	SINGLE	F	3'-0"	3'-0"	0"	7'-0"	1 3/4"	SCW	-	-	-	F1	HM	PAINT						E122	C	
E125	A	SINGLE	V	3'-0"	3'-0"	0"	7'-0"	1 3/4"	SCW	-	-	1/2"	F2	HM	PAINT						E125	A	
E130	A	PAIR	FG	6'-0"	3'-0"	3'-0"	7'-0"	1 3/4"	SCW	-	-	-	F1	HM	PAINT				90		E130	A	
E130	B	SINGLE	FG	3'-0"	3'-0"	0"	7'-0"	1 3/4"	SCW	-	-	-	F1	HM	PAINT						E130	B	
E135	A	CASED OPENING		3'-0"	3'-0"	0"	7'-0"	1 3/4"	SCW	-	-	-	F1	HM	PAINT						E135	A	
E136	A	SINGLE	V	3'-0"	3'-0"	0"	7'-0"	1 3/4"	SCW	-	-	1/2"	F2	HM	PAINT						E136	A	
E137	A	SINGLE	V	3'-0"	3'-0"	0"	7'-0"	1 3/4"	SCW	-	-	1/2"	F2	HM	PAINT						E137	A	

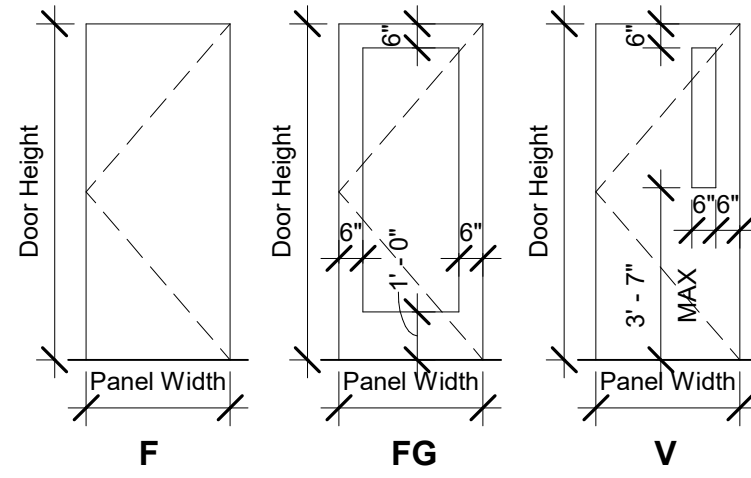

3 DOOR TYPES.
1/4" = 1'-0"

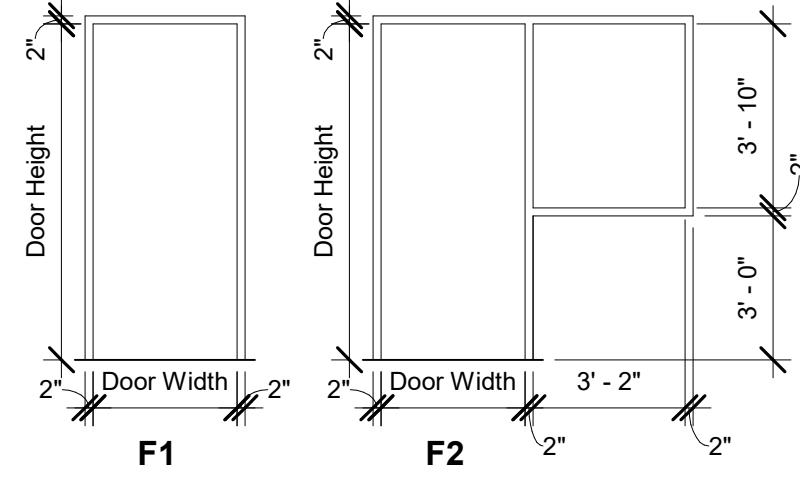

4 FRAME TYPES.
1/4" = 1'-0"

PLAN GENERAL NOTES:

- ALL INTERIOR PARTITIONS ARE DIMENSIONED TO THE CENTER OF THE PARTITION UNLESS OTHERWISE NOTED.
- DIMENSIONS ASSOCIATED WITH INTERIOR PARTITIONS WHEN TAKEN FROM EXTERIOR CONCRETE WALLS ARE DIMENSIONED TO THE INTERIOR FACE OF CONCRETE.
- AT GYP. BD. PARTITIONS, DOOR JAMBS ARE TO BE 4" OFF OF ADJACENT WALLS UNLESS OTHERWISE NOTED.
- AT GYP. BD. PARTITIONS, ALL DOORS ARE DIMENSIONED TO CENTER WHERE SHOWN.
- ALL EXTERIOR DIMENSIONS ARE TO THE FACE OF FINISH UNLESS OTHERWISE NOTED.
- WHERE DIMENSIONS ARE NOTED "CLEAR", IT IS FROM FACE OF FINISH MATERIAL TO FACE OF FINISH MATERIAL.
- WHERE SURFACES ARE NOTED TO "ALIGN", FACES OF FINISH MATERIALS ARE TO ALIGN.
- PROVIDE WOOD BLOCKING IN PARTITIONS FOR ALL AV EQUIPMENT, TOILET ACCESSORIES, WALL CABINETS, ETC.



3117 2nd Avenue South Birmingham, AL 35233
p 205.870.3090
www.LIVEdesigngroup.com



1 FIRST FLOOR PLAN.
1/8" = 1'-0"

2 SECOND FLOOR PLAN.
1/8" = 1'-0"

CALVARY CHURCH
CALVARY CHURCH FACILITY ADDITION
BENTONVILLE, AR

-PROGRESS PRINT-
NOT FOR
CONSTRUCTION
FOR PRICING AND
REVIEW

Revisions
No. Description Date

Project Number
21010

Date
02/19/2026

FIRST & SECOND
FLOOR PLANS

PH2.10

CEILING LEGEND	
EXP. PT.	EXPOSED TO STRUCTURE & PAINTED
	2' x 2' LAY-IN CEILING PANELS ACT (WHITE)
	2' x 2' LAY-IN CEILING PANELS ACT (BLACK)
	2' x 4' LAY-IN CEILING PANELS ACT
	GYPSUM BOARD
	SURFACE MOUNTED DOWN LIGHT, 6\"/>
	RECESSED DOWNLIGHT, 6\"/>
	EXIT SIGN
	WALL MOUNTED LIGHT FIXTURE
	SUPPLY AIR DIFFUSER
	RETURN AIR DIFFUSER
	PENDANT MOUNTED LINEAR
	SURFACE MOUNTED ROUGH SERVICE
	SURFACE MOUNTED 2'x4'
	SURFACE MOUNTED 1'x4'
	SURFACE MOUNTED GLOBE, 16\"/>
	SURFACE MOUNTED GLOBE, 23\"/>
	SUSPENDED LIGHT FIXTURE

LIVE

design group

architecture
interior design

3117 2nd Avenue South Birmingham, AL 35203
p 205.870.3090
www.LIVEdesigngroup.com

1

2

CALVARY CHURCH

CALVARY CHURCH FACILITY ADDITION

BENTONVILLE, AR

-PROGRESS PRINT-

NOT FOR CONSTRUCTION

FOR PRICING AND REVIEW

Revisions

No. Description Date

Project Number

21010

Date

02/19/2026

FIRST & SECOND REFLECTED CEILING PLANS

PH2.15

1 FIRST FLOOR REFLECTED CEILING PLAN.
1/8" = 1'-0"

2 SECOND FLOOR REFLECTED CEILING PLAN
1/8" = 1'-0"

This drawing is the property of LIVE design group pc, and is not to be reproduced, copied, or altered in whole or in part or used for any purpose without the approval of LIVE design group pc, and is to be returned upon request. 3117 2nd Avenue South Birmingham, AL 35203 | p 205.870.3090 | www.LIVEdesigngroup.com

2/19/2026 3:11:31 PM