



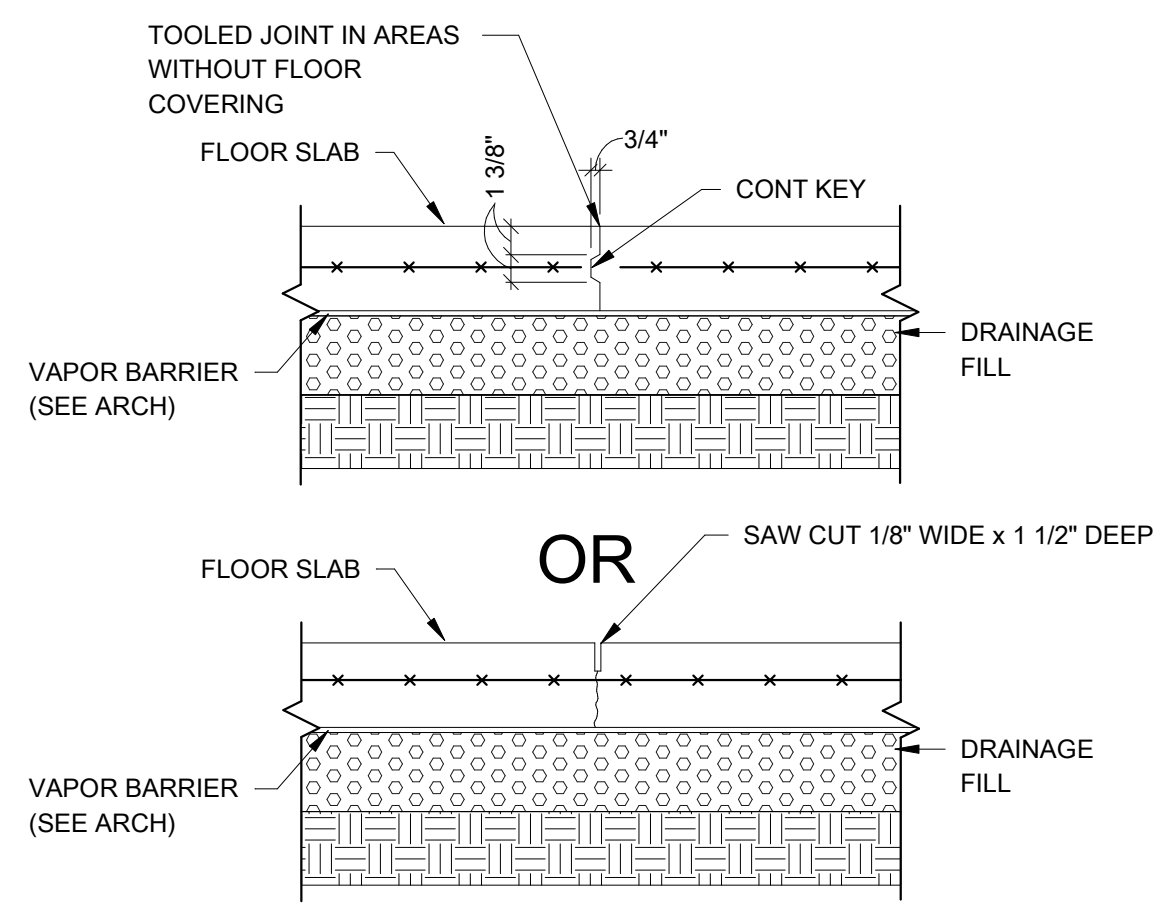


CONTR:
IF SAW JOINTS ARE USED, CONTRACTOR IS RESPONSIBLE FOR JOINTS CRACKING AS SHOWN ON PLAN AND DETAIL. SAWING JOINTS SHALL BEGIN AS SOON AS THE SURFACE IS FIRM ENOUGH SO THAT IT WILL NOT BE TORN OR DAMAGED BY THE BLADE. SLABS MUST BE SAWN ON SAME DAY SLAB IS POURED. DO NOT ALLOW SLAB TO CURE OVERNIGHT BEFORE SAWING.

1 CONTROL JOINT DETAIL
3/4" = 1'-0"

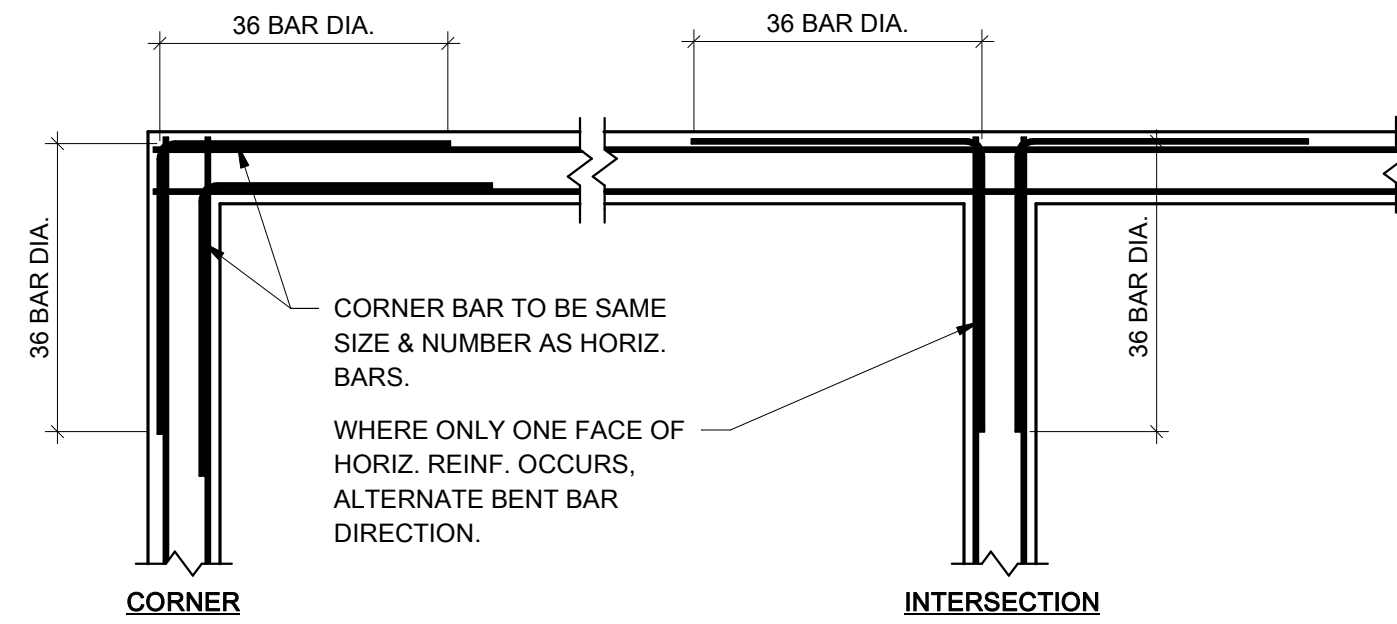


TYPICAL FOR:
BEAMS
FOOTINGS
THICKEND SLABS


2 TYPICAL CORNER BAR DETAIL
3/4" = 1'-0"

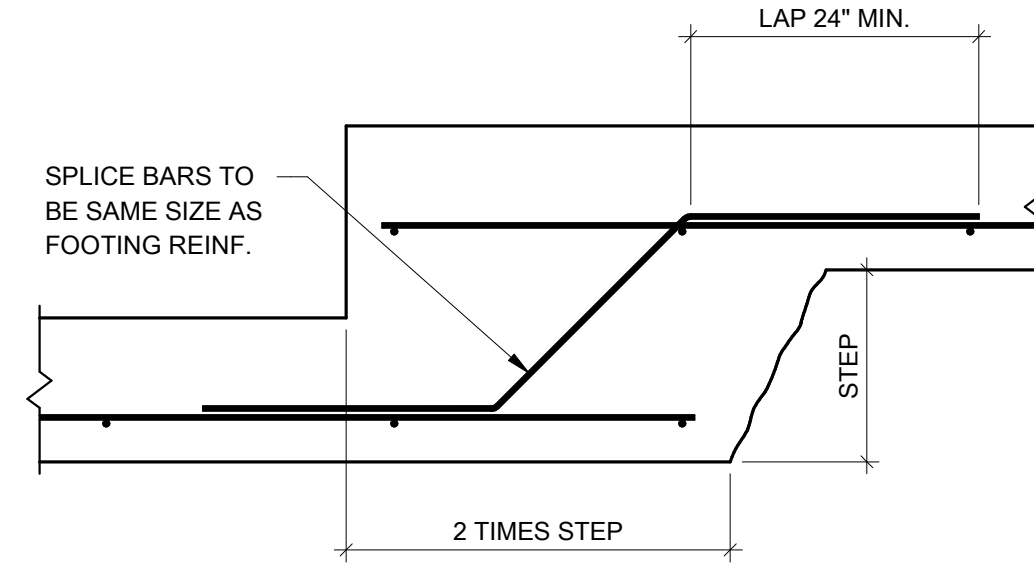


3 TYPICAL CONT. FOOTING STEP DETAIL
3/4" = 1'-0"

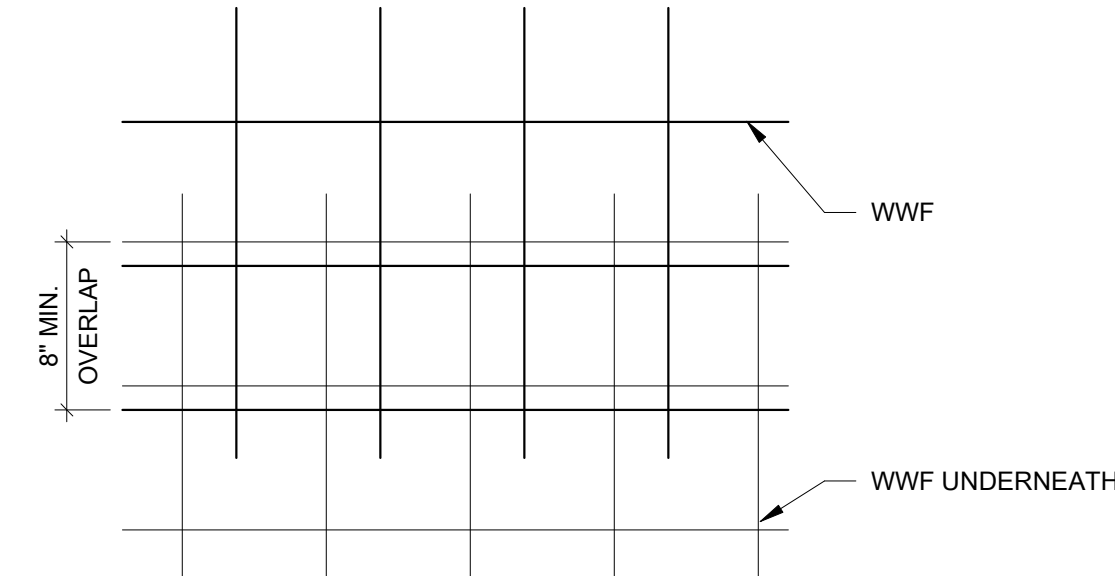


4 TYP. WWF OVERLAP
1 1/2" = 1'-0"

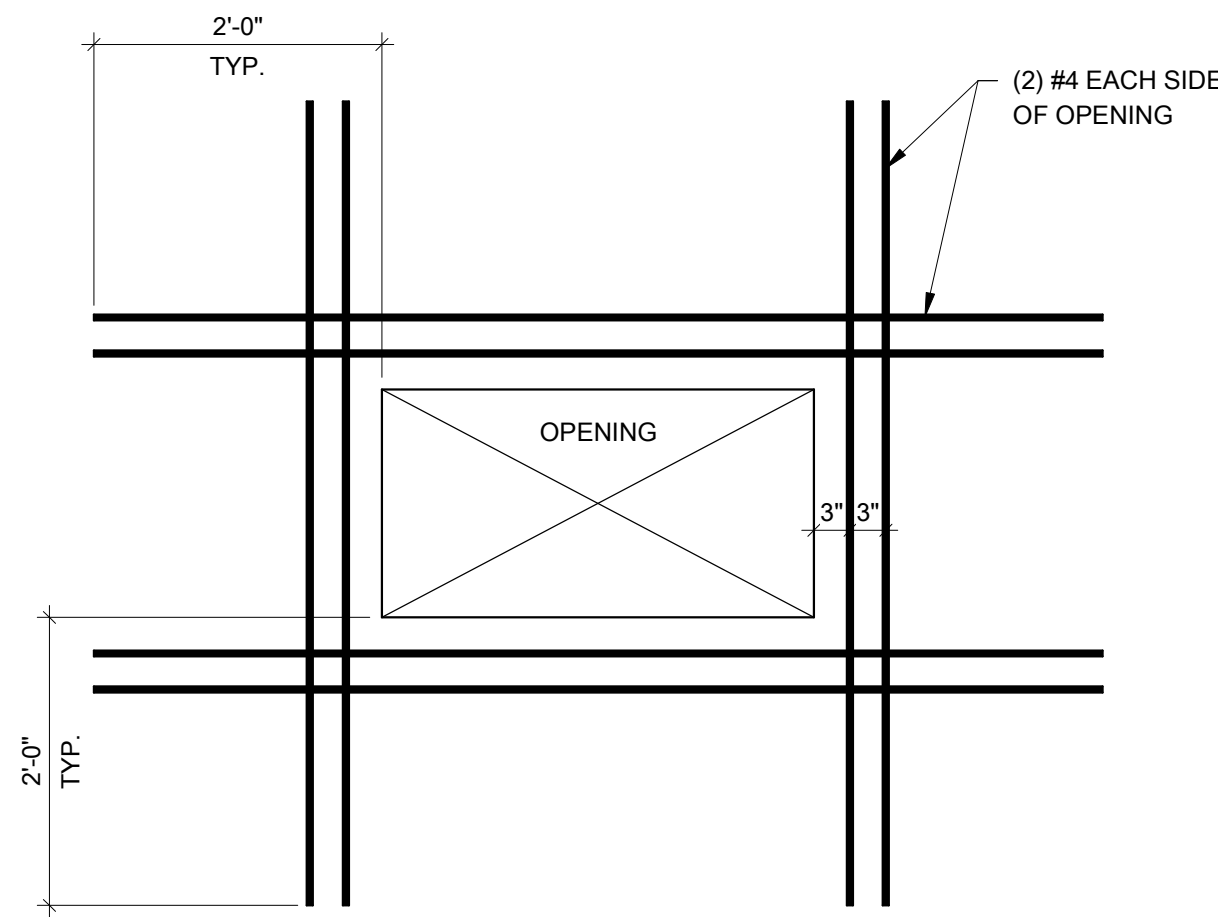

TYP. @ OPENINGS & PIPING LARGER THAN 6\"/>

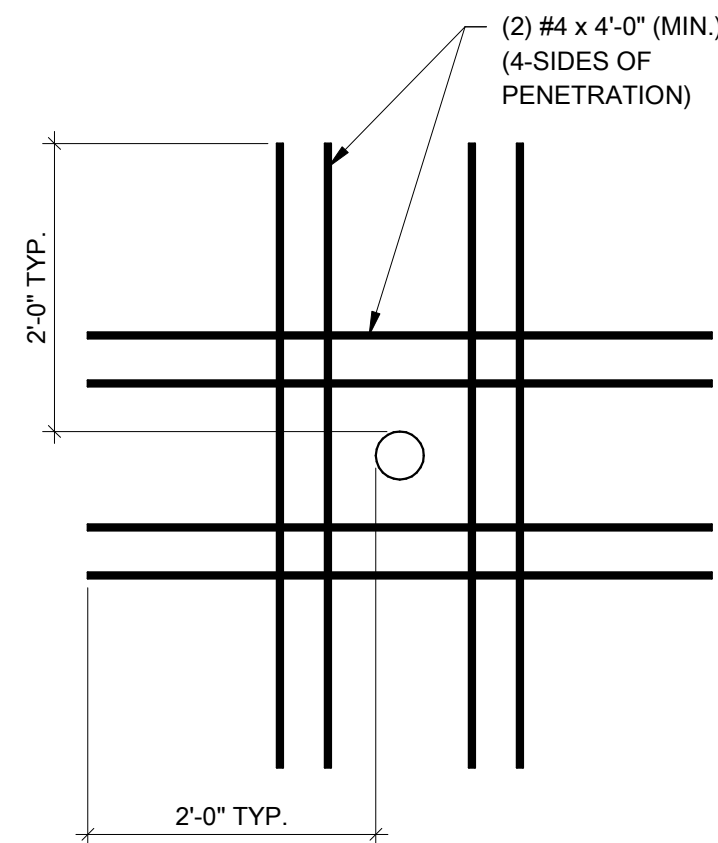

APPLIES AT PLUMBING PENETRATIONS

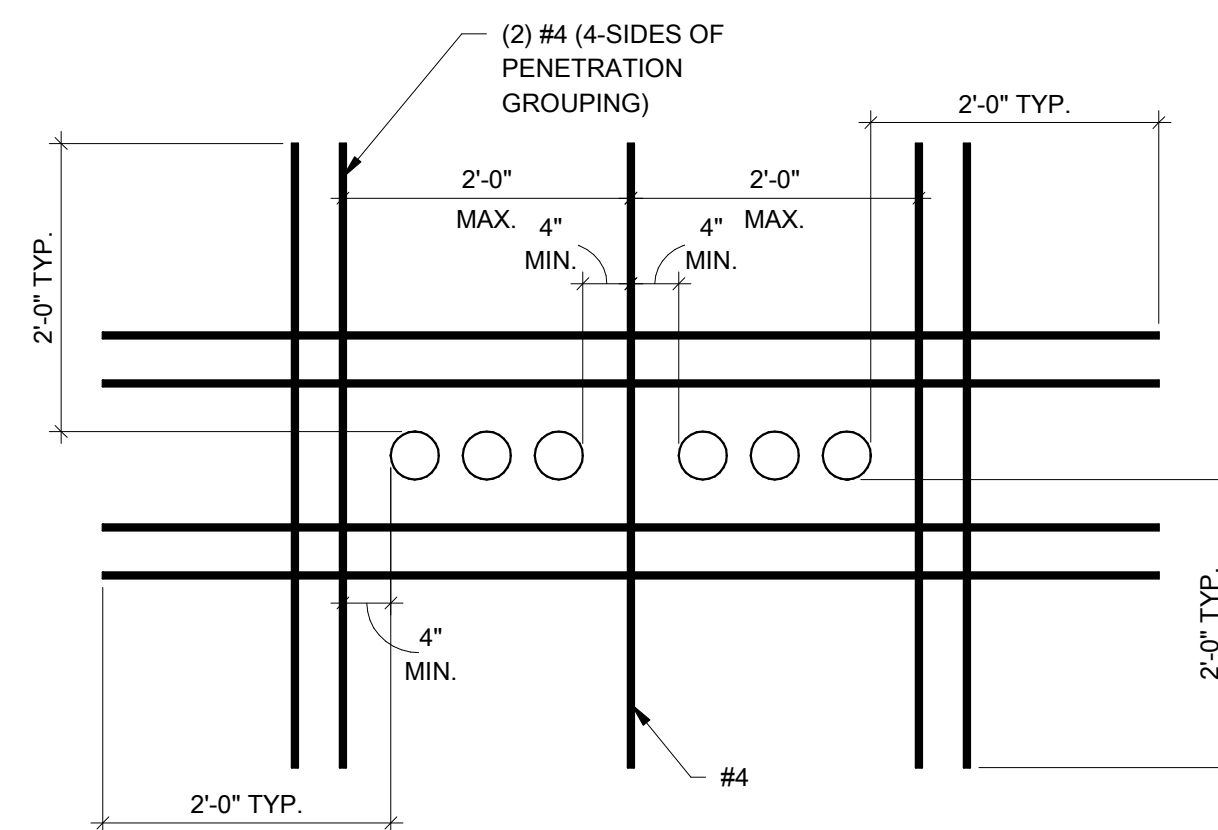

APPLIES @ GROUPS OF PIPE PENETRATIONS

5 TYP. REINF. @ SLAB OPENINGS & PIPE PENETRATIONS
3/4" = 1'-0"



401 West Capitol Avenue, Suite 305
Little Rock, Arkansas 72201-3401
Phone No. (501) 375-3752
ECI JOB# 25-065

ARKANSAS GAME AND FISH COMMISSION
JONESBORO FIELD OFFICE RECONSTRUCTION
600 EAST LAWSON RD
JONESBORO, AR 72404

FOUNDATION DETAILS

NO. DATE DESCRIPTION

25-065

07.30.2026

CD SET

ISSUE

S200