

HOLDOWN SCHEDULE				
TAG	SIMPSON STRONG-TIE HOLDOWN PRODUCT	STUD COLUMN	ANCHOR DIAMETER	ANCHOR DEPTH
HD-1	HDUE5	(2) PLY	5/8"	7"
HD-2	HDUE5	(2) PLY	5/8"	9"
HD-3	HDUE7	(2) PLY	5/8"	11"

PAD FOOTING SCHEDULE				
TYPE	WIDTH	LENGTH	THICKNESS	REINFORCEMENT
PF300	3'-0"	3'-0"	1'-0"	(4) #5 EACH WAY (BOT)


SHEAR WALL SCHEDULE		
	TYPE	COMMENTS
1	1/2" WOOD SHEATHING (BOTH SIDES)	10d NAILS @ 6" O.C. @ PANEL EDGES & 12" O.C. @ INTERIOR PANEL SUPPORTS
2	1/2" WOOD SHEATHING (ONE SIDE)	10d NAILS @ 6" O.C. @ PANEL EDGES & 12" O.C. @ INTERIOR PANEL SUPPORTS
5		

FOUNDATION PLAN NOTES	
#	NOTE
1	EXISTING SLAB
2	CUT IN NEW COLUMN BLOCKOUTS & REMOVE EXISTING COLUMN BASES THEN POUR BACK BLOCKOUTS WITH CONCRETE w/ BONDING AGENT (TYP ALL COLUMNS)



WDD
ARCHITECTS

ECI
401 West Capitol Avenue, Suite 300
Little Rock, Arkansas 72201-3401
Phone No. (501) 375-3752
ECI JOB# 25-065

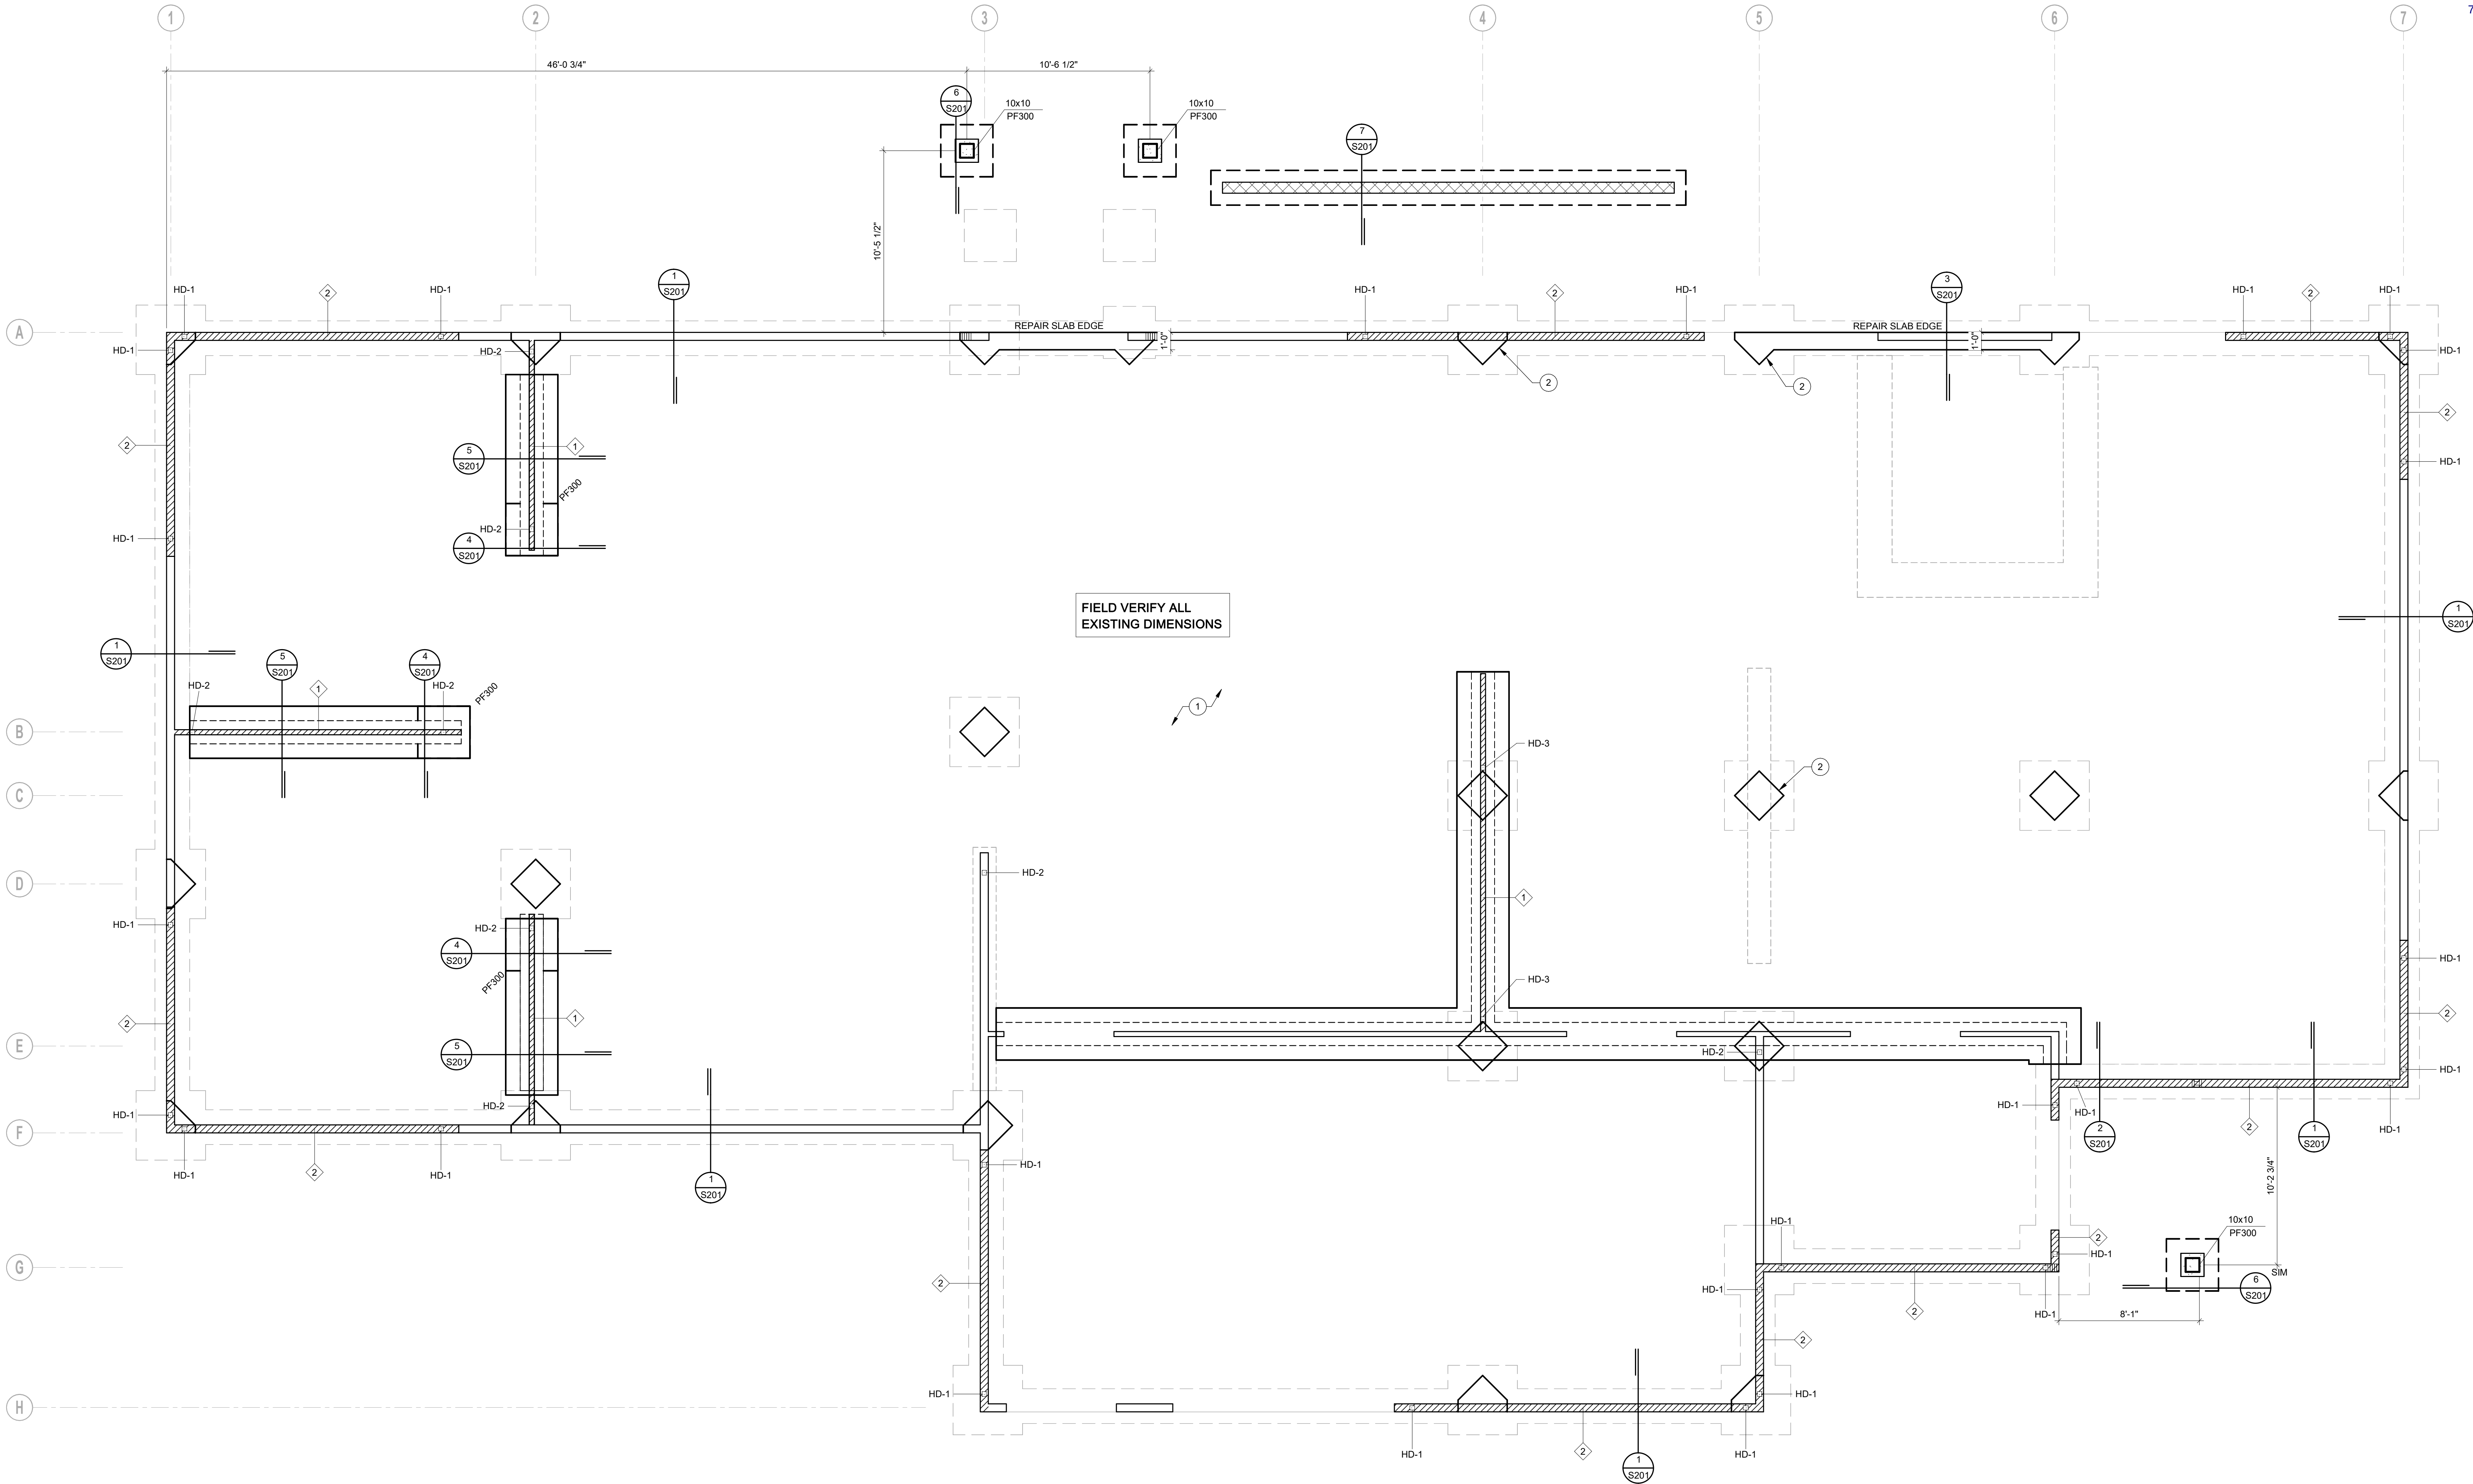

ARKANSAS GAME AND FISH COMMISSION
JONESBORO FIELD OFFICE RECONSTRUCTION
600 EAST LAWSON RD
JONESBORO AR 72404

FOUNDATION PLAN

NO.	DATE	DESCRIPTION
-----	------	-------------

25-065

07.30.2026

CD SET

ISSUE

S101