


2025.05.14 4:51 PM
Arkansas Game and Fish Commission - Jonesboro Field Office Reconstruction and Office Relocation
Approved: Doug Anderson, General and P.E.
Jonesboro, Arkansas 72404
Jonesboro Field Office Reconstruction and Office Relocation

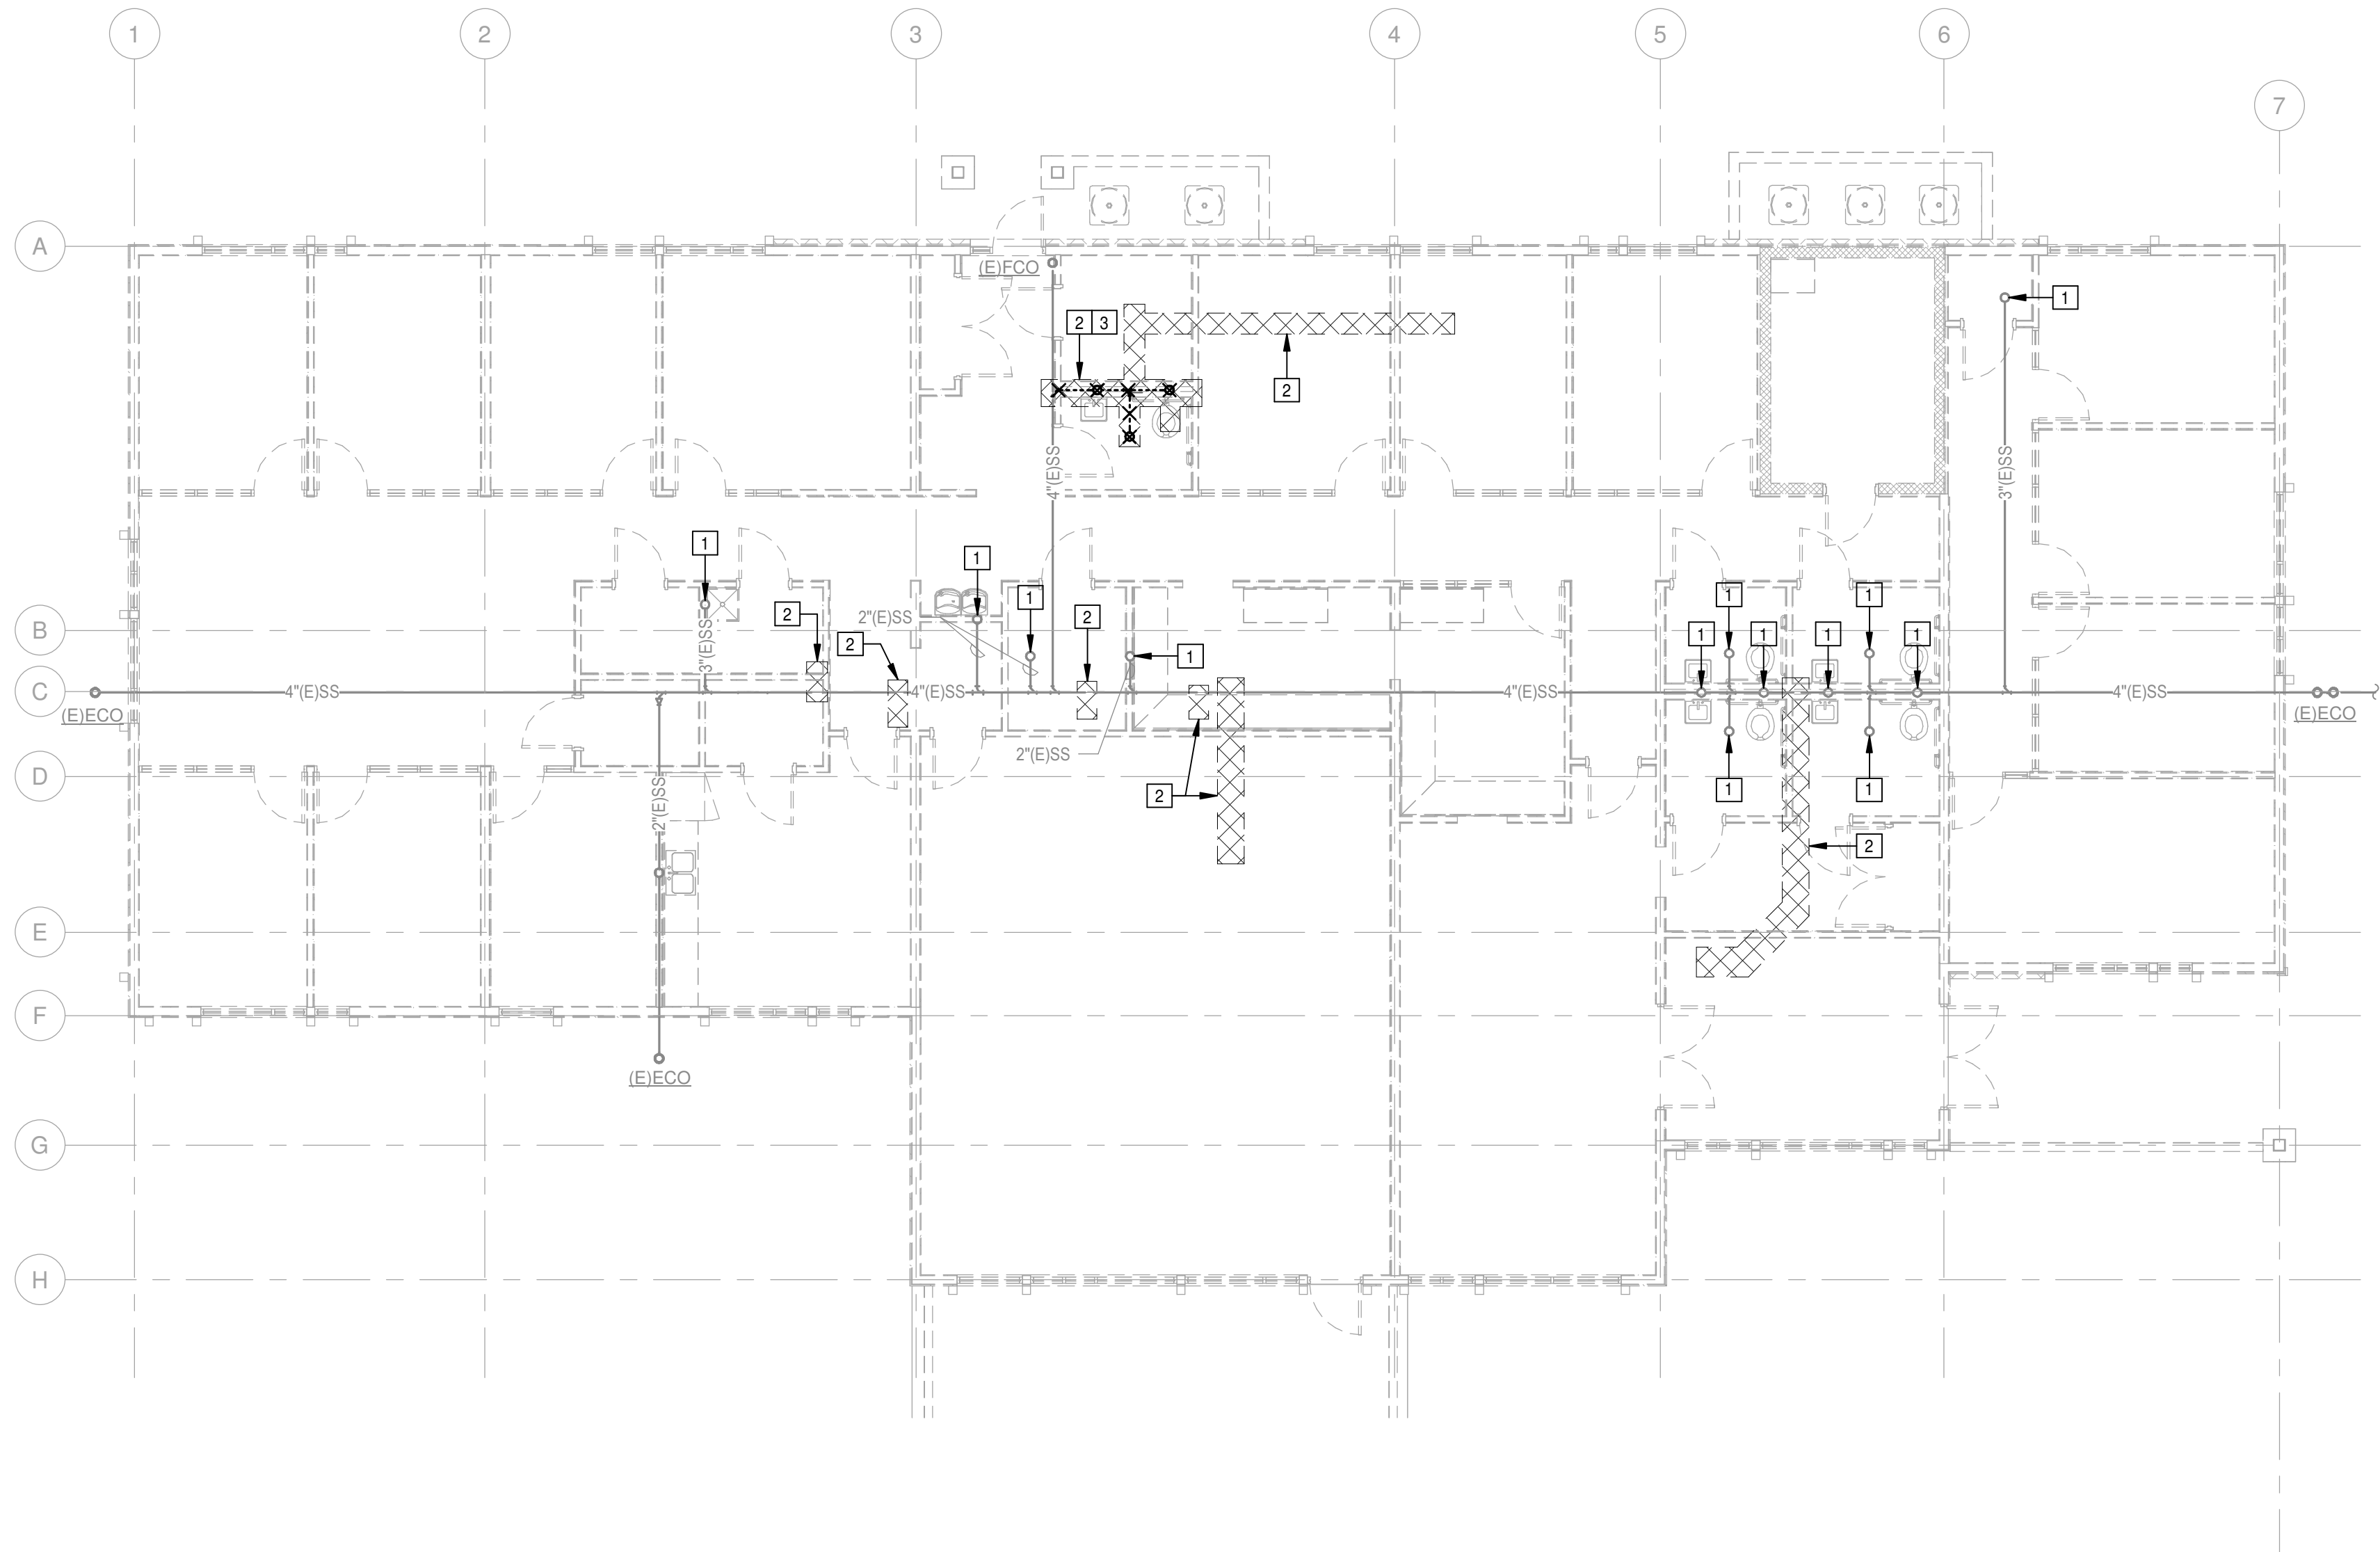


1 FIRST FLOOR PLAN - PLUMBING
1/8" = 1'-0"

GENERAL PLUMBING DEMOLITION NOTES

1. ALL EXISTING PIPING AND EQUIPMENT SHOWN HAS BEEN TAKEN FROM THE BEST AVAILABLE EXISTING INFORMATION AND SITE VISITS. THE DRAWINGS ARE DIAGRAMMATIC AND ALL FIXTURES, PIPING, AND DEVICES MAY NOT BE SHOWN.
2. THE PLUMBING CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILIAR WITH THE EXISTING SYSTEMS AND CONDITIONS IN AREAS OF RENOVATION. FIELD VERIFY EXISTING PLUMBING FIXTURE AND PIPING LOCATIONS, TYPES, SIZES, ETC.
3. THE PLUMBING CONTRACTOR SHALL ALSO REVIEW THE ARCHITECTURAL DEMOLITION DRAWINGS AS PART OF THIS CONTRACT FOR ADDITIONAL INFORMATION AND REQUIREMENTS.
4. THE PLUMBING CONTRACTOR SHALL COORDINATE DEMOLITION WORK WITH THAT OF OTHER TRADES IN ORDER TO AVOID CONFLICTS.
5. THE PLUMBING CONTRACTOR SHALL REMOVE ALL PLUMBING FIXTURES, CARRIERS, TRIM, ACCESSORIES, EQUIPMENT, FLOOR DRAINS, AND PIPING AS SHOWN OR INDICATED ON THE DRAWINGS.
6. ALL PIPING TO BE REMOVED SHALL BE REMOVED TO BELOW FLOOR, ABOVE CEILING, OR IN WALLS BACK TO MAINS OR SHUT OFF VALVES AT MAINS AND PROPERLY CAPPED PER CODE WITHOUT LEAVING DEAD ENDED PIPING.
7. REMOVE ALL EXPOSED EXISTING PIPING WHICH IS DEEMED INOPERABLE AS A RESULT OF THIS CONTRACT UNLESS SHOWN OR NOTED OTHERWISE. NO EQUIPMENT OR DEVICES THAT HAVE BEEN DISCONNECTED OR ABANDONED SHALL REMAIN.
8. ALL PIPING TO BE REMOVED SHALL BE REMOVED COMPLETELY OR AS OTHERWISE SHOWN OR INDICATED ON DRAWINGS. ALL PIPE HANGERS, SLEEVES, RISER CLAMPS, ETC. SHALL BE REMOVED COMPLETELY WITH PIPING. NO EXISTING HANGER SYSTEMS SHALL BE REUSED FOR NEW PIPING.
9. ANY SYSTEMS OR EQUIPMENT TO REMAIN ACTIVE DURING RENOVATION SHALL BE KEPT IN OPERATION BY PROVIDING TEMPORARY PIPING CONNECTIONS AS REQUIRED UNTIL NEW SYSTEMS ARE INSTALLED AND OPERATIONAL.
10. ALL SERVICE INTERRUPTIONS SHALL BE COORDINATED AND APPROVED WITH THE OWNER PRIOR TO COMMENCEMENT OF WORK.
11. EXISTING PIPE, TO WHICH NEW PIPE IS CONNECTED, SHALL BE RODDED, FLUSHED, AND CLEANED FROM POINT OF CONNECTION TO MAIN OUTSIDE BUILDING.
12. ALL PLUMBING FIXTURES, VALVES, PIPING, AND EQUIPMENT WHICH ARE TO BE REMOVED AND NOT RELOCATED SHALL BECOME THE PROPERTY OF THE OWNER AND DELIVERED TO STORAGE ON SITE OR DISPOSED OF AS DIRECTED BY THE OWNER.

PLUMBING DEMOLITION KEYED NOTES

1. REMOVE EXISTING SANITARY SEWER PIPING ABOVE GRADE, AND CAP BELOW FINISHED CONCRETE SLAB. PATCH FLOOR AS DIRECTED BY ARCHITECTURAL DRAWINGS.
2. SAW CUT CONCRETE SLAB FOR NEW INSTALLATION OF SANITARY WASTE AND VENT PIPING. SAW CUTTING DIMENSIONS SHALL ALLOW FOR SUFFICIENT SPACE FOR INSTALLING, BEDDING, AND BACKFILLING THE PIPES WHILE ADHERING TO LOCAL BUILDING CODES AND ASTM STANDARDS.
3. REMOVE EXISTING SANITARY SEWER PIPING BELOW GRADE, AND CAP BACK TO THE NEAREST MAIN.

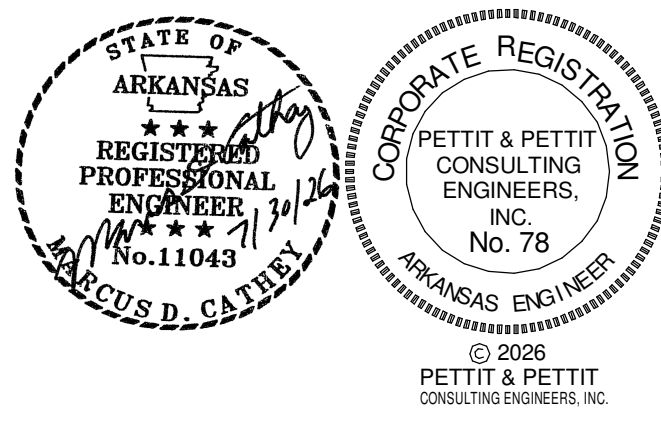

ARKANSAS GAME AND FISH COMMISSION
JONESBORO FIELD OFFICE RECONSTRUCTION
600 EAST LAWSON RD
JONESBORO, AR 72404

FIRST FLOOR DEMOLITION PLAN -
PLUMBING

NO. DATE DESCRIPTION

25-065

07.30.2026

ISSUE

P100