

*Quality People. Building Solutions.*

Comfort Systems USA (Arkansas), Inc.  
P.O. Box 16620  
Little Rock, AR 72231  
Phone 501-834-3320  
Fax 501-834-5416

**Date:** 11/20/2024

**Return Request:** 11/30/2024

**Project:** UAMS (CAMID)

**Supplier:** Harrison Energy

**Manufacturer:** Daikin

**Submittal:** Air Handling Units

**Submittal Number:** 23 73 13-01

**Drawing # and Installation:** Mechanical Drawings

**ARCHITECT**

Clark Kenersen  
2020 Baltimore Avenue, Suite 300  
Kansas City, MO 64108  
816-474-8237

**ENGINEER**

Clark Kenersen  
2020 Baltimore Avenue, Suite 300  
Kansas City, MO 64108  
816-474-8237

**GENERAL CONTRACTOR**

CDI Contractirs  
3000 Cantrell Rd.  
Little Rock, AR 72202  
501-666-4300

**MECHANICAL SUBCONTRACTOR**

Comfort Systems USA (Arkansas), Inc.  
9924 Landers Rd.  
N. Little Rock, AR 72117  
501-834-3320

Notes:

**CSUSA PROJECT NO.**

**22-6069**

[sean@comfortar.com](mailto:sean@comfortar.com)

9924 Landers Rd.  
No. Little Rock, AR 72117



# Submittal

**Prepared For:**  
Clark & Enerson

**Date:**  
November 1, 2024

**Sold To:**  
Comfort Systems USA

**Job Name:**  
UAMS CAMID

---

Harrison Energy Partners is pleased to provide the enclosed submittal for your review and approval.

**Qty. Product Summary**  
2 Daikin Air Handling Units

Josh Robinson | Sales Engineer  
Harrison Energy Partners  
1501 Westpark Drive, Suite 9  
Little Rock, AR 72204-2457  
Ph. 501-539-0633

*The attached information describes the equipment we propose to furnish for this project, and is submitted for your approval.*

---

### Indoor Air Handling Units

Tag	Qty.	Description	Model Number
AHU-2	1	Indoor Air Handling Unit	Daikin CAH064
AHU-5	1	Indoor Air Handling Unit	Daikin CAH011


- Double wall construction with 2" R13 insulation
- ASHRAE leakage class 6
- Access sections with view ports and lights as required
- Stainless steel drain pans in humidifier and cooling coil sections
- 8" base rail
- Galvanized steel interior liners
- Combination filter section
- Heat recovery coil section
- Steam IFB coil section
- Humidifier section
- Chilled water coil section with UV lights
- Supply fan section
  - NOTE: AHU-5 is selected as a stacked unit. Software limitations only allow us to select one section with a supply fan, therefore one of the supply fan sections is labeled "return/exhaust." Both fan sections in this unit will be utilized as supply fans.



## SUBMITTAL DATA

Job Name	UAMS CAMID
For	
Sold To	
Prepared For	
Customer PO#	
Prepared By	Jake Skinner
Date	11/1/2024

Job Information		Technical Data Sheet	
Job Name	UAMS CAMID		
Date	November 01 2024		
Submitted By	JS		
Software Version	13.43		
Unit Tag	AHU-2		



**Unit Overview**

Model Number	Supply					
	Air Volume cfm	Static Pressure		External Dimensions		
		External inWc	Total inWc	Height in	Width in	Length in
CAH064GDHM	26000	4.25	8.35	92*	124*	334

\*Not including base rails, coil connectors, drain connectors and control boxes.

**Unit**

<b>Model Number:</b>	CAH064GDHM				
<b>Approval:</b>	ETL Listed / ETL Listed to Canadian Safety Standards (ETL Label / ETLc Label)				
<b>Construction:</b>	High pressure low leakage construction				
<b>Outer Panel:</b>	24 gauge G90 Galvanized Steel (unpainted)				
<b>Liner:</b>	24 gauge Galvanized Steel (unless noted per section)				
<b>Insulation:</b>	R-13 Injected Foam				
<b>Unit Configuration:</b>	Inline horizontal		<b>Drive (Handling) Location:</b>	Left	
<b>Base:</b>	8" formed channel		<b>Wall Thickness:</b>	2 in	
<b>Altitude:</b>	0 ft		<b>Parts Warranty:</b>	Standard One Year	

Plenum Section	Component: 1	Length: 22 in	Shipping Section: 1
----------------	--------------	---------------	---------------------

<b>Air Pressure Drop</b>				
0.06 inWc				
<b>Custom Openings</b>				
Custom Opening	Location	Width	Height	Rainhood w/Screen
1	End	108 in	34 in	None
<b>Door</b>				
Location	Width	Opening	Window Type	Light
Drive side	18 in	Outward	Round	LED marine light kit and switch only

AHU-2

Technical Data Sheet

Combination Filter			Component: 2				Length: 22 in		Shipping Section: 1		
Access			Face Velocity				Face Area		Air Volume		
Side			393 ft/min				66.2 ft <sup>2</sup>		26000 cfm		
Portion	Type	Efficiency	Air Pressure Drop				Number of Filters	Height	Width	Depth	
			Clean Air	Mean Air	Dirty Air	User Spec					
Pre-Filter	Pleated	MERV 8	0.17 inWc	0.58 inWc	1.00 inWc	N/A	18	24 in	20 in	2 in	
							5	12 in	24 in	2 in	
Filter	Varicel VXL cartridge	MERV 15	0.27 inWc	1.13 inWc	2.00 inWc	N/A	18	24 in	20 in	12 in	
							5	12 in	24 in	12 in	
Door											
Location				Width				Opening			
Drive side				18 in				Outward			
Special Options											
Sound Baffle						Filter Gauge					
(As casing details)						Magnehelic 0-5"					

Access Section		Component: 3			Length: 22 in		Shipping Section: 1		
Air Pressure Drop									
0.00 inWc									
Door									
Location		Width		Opening		Window Type		Light	
Drive side		18 in		Outward		Round		LED marine light kit and switch only	

Chilled Water Coil		Component: 4			Length: 42 in		Shipping Section: 2			
Coil Model	Total Capacity	Sensible Capacity	Number of Coils	Number of Rows	Finns per Inch	Tube Diameter	Tube Spacing (Face x Row)			
5WL1208B	356299 Btu/hr	356299 Btu/hr	2	8	12	0.625 in	1.50 in x 1.299 in			
Air Volume	Air Temperature				Coil Air Pressure Drop	Finned Height	Finned Length	Face Area	Face Velocity	
	Entering		Leaving							
	Dry Bulb	Wet Bulb	Dry Bulb	Wet Bulb						
26000 cfm	99.6 °F	77.2 °F	87.1 °F	73.8 °F	0.69 inWc	39 in	111 in	60.12 ft <sup>2</sup>	432 ft/min	
Fluid		Flow Rate		Pressure Drop		Velocity		Volume		
Entering	Leaving									
82.9 °F	95.4 °F	60.00 gpm		8.60 ftHd		1.70 ft/s		61.0 gal		
Connection [Data Per Coil]				Glycol Type		Min. Fin Surface Temp.		Min. Tube Wall Surface Temp.		Fouling Factor
Type	Size	Location		Material						
Threaded	2.50 in	Drive side		Carbon steel		Propylene (30%)		82.9 °F		82.9 °F
Material						Drain Pan		Drain Side		Turbospiral
Fin		Tube		Header		Case				
Aluminum .0075 in		Copper .020 in		Copper		Galv. steel		Stainless steel		Drive side

AHRI 410 Certification

Coil is NOT certified by AHRI

Door									
Location		Width		Opening		Window Type		Light	
Drive side		20 in		Outward		Round		LED marine light kit and switch only	

AHU-2

Technical Data Sheet

IFB Steam Coil		Component: 5		Length: 36 in		Shipping Section: 2	
Coil Model	Total Capacity	Number of Coils	Number of Rows	Fins per Inch	Tube Diameter	Tube Spacing (Face x Row)	
AMX12CE103.469.01	1546300 Btu/hr	1	1	12	0.625 in	1.50 in x 1.299 in	
Air Volume	Air Temperature		Coil Air Pressure Drop	Finned Height	Finned Length	Face Area	Face Velocity
	Entering Dry Bulb	Leaving Dry Bulb					
26000 cfm	17.6 °F	72.7 °F	0.15 inWc	69 in	99 in	47.63 ft²	548 ft/min
Fluid					Max. Superheat Temp. in Steam Coil Inlet		
Steam Pressure		Condensate Load		30.0 °F			
15.00 psig		1620.58 lb/hr					
Connection [Data Per Coil]							
Type	Steam Size	Condensate Size	Location		Material		
Threaded	3.00 in	2.50 in	Drive side		Carbon steel		
Material							
Fin	Tube	Header		Case			
Copper .012 in	Copper .035 in	Carbon Steel		Galv. steel			

Access Section		Component: 6		Length: 24 in		Shipping Section: 3	
Air Pressure Drop							
0.00 inWc							
Door							
Location	Width	Opening	Light				
Drive side	20 in	Outward	LED marine light kit with GFI outlet				

Future Chilled Water Coil		Component: 7		Length: 38 in		Shipping Section: 3	
Number of Coils				Number of Rows			
2				2			
Coil Air Pressure Drop	Finned Height	Finned Width	Face Area	Face Velocity			
0.20 inWc	39 in	111 in	60.12 ft²	432 ft/min			
Connection Location				Connection Material			
Drive side				Carbon steel			
Coil Model	Drain Pan		Drain Pan Side				
Future Coil (Not Supplied)	Stainless steel		Drive side				
AHRI 410 Certification							
Coil is NOT certified by AHRI							
Door							
Location	Width	Opening	Light				
Drive side	22 in	Outward	LED marine light kit with GFI outlet				

Humidifier Section.  
 Humidifier manifold to be factory installed. Performance data is located at the end of this submittal

AHU-2

Technical Data Sheet

Chilled Water Coil		Component: 8			Length: 48 in		Shipping Section: 4			
Coil Model	Total Capacity	Sensible Capacity	Number of Coils	Number of Rows	Finns per Inch	Tube Diameter	Tube Spacing (Face x Row)			
5WD0812B	2244626 Btu/hr	1352153 Btu/hr	2	12	8	0.625 in	1.50 in x 1.299 in			
Air Volume	Air Temperature				Coil Air Pressure Drop	Finned Height	Finned Length	Face Area	Face Velocity	
	Entering		Leaving							
26000 cfm	Dry Bulb	Wet Bulb	Dry Bulb	Wet Bulb	1.03 inWc	39 in	111 in	60.12 ft²	432 ft/min	
	99.6 °F	77.2 °F	52.0 °F	51.8 °F						
Water		Flow Rate	Pressure Drop	Velocity	Volume	Weight				
Entering	Leaving	315.70 gpm	14.30 ftHd	3.30 ft/s	92.0 gal	768.00 lb				
45.0 °F	59.2 °F									
Connection [Data Per Coil]					Min. Fin Surface Temp.	Min. Tube Wall Surface Temp.	Fouling Factor			
Type	Size	Location	Material	45.0 °F			45.0 °F	0.000		
Threaded	2.50 in	Drive side	Carbon steel							
Material					Drain Pan		Drain Side			
Fin	Tube	Header	Case							
Aluminum .0075 in	Copper .020 in	Copper	Galv. steel	Stainless steel		Drive side				

AHRI 410 Certification



Certified in accordance with the AHRI Forced-Circulation Air-Cooling and Air-Heating Coils Certification Program which is based on AHRI Standard 410 within the Range of Standard Rating Conditions listed in Table 1 of the Standard. Certified units may be found in the AHRI Directory at [www.ahridirectory.org](http://www.ahridirectory.org)

Door

Location	Width	Opening	Window Type	Light
Drive side	20 in	Outward	Round	UVC Lights

Supply Fan Array

Component: 10

Length: 42 in

Shipping Section: 5

Fan Performance

Air Volume*	Static Pressure			Fan Energy Index(FEI)	Total Input Power	Fan Shaft Power*	Speed		Redundancy(N-1)	Fan Circuit	
	External	Total	Cabinet				Operating	Maximum		MOP	MCA
6500 cfm	4.25 inWc	8.35 inWc	0.01 inWc	1.25	41.7 kW	12.68 BHP	3065 rpm	3650 rpm	93.4 %	90.00 A	74.38 A

Fan Data

Fan Type	Blade Type / Class	Quantity of Fans	Wheel Diameter	Number of Blades	Discharge	Motor Location
SWSI / 2x2	Airfoil / 2	4	18.25 in	12	Axial	Behind Fan

Motor Data

Power	Electrical Supply	Speed	Efficiency	Enclosure	Frame Size	Supplier	Number of Poles	Lock Rotor Current*	Full Load Current*
15.0 HP	460/60/3 V/Hz/Phase	3500 rpm	Premium	ODP	215 T frame	Generic	2	111.01 A	17.50 A

Fan Options

Isolation Backdraft Dampers:	Provided	Block Off Plate:	None
Piezometer Ring:	1 ring per fan	Piezometer Delta P:	16.26
Shaft Grounding Kit:	Provided	Isolator Type:	Spring

VFD/Starter/Disconnect Data

Selection Type:	MMP J-Box	Vendor:	Factory Standard
VFD Power:	15 HP	Voltage:	460 v
Height x Width x Depth:	15.75 in x 11.81 in x 7.90 in	Mounting:	Door Side
Enclosure:	NEMA 1		

Panel

Location	Width	Opening
Removable panels	- in	Outward

Notes

\* after a unit label denotes the data for an individual fan.





AHU-2

Technical Data Sheet

Plenum Section		Component: 11	Length: 24 in	Shipping Section: 5	
<b>Air Pressure Drop</b>					
0.24 inWc					
<b>Custom Openings</b>					
Custom Opening	Location	Width	Height	Rainhood w/Screen	
1	End	80 in	24 in	None	
<b>Door</b>					
Location	Width	Opening	Window Type	Light	
Drive side	20 in	Outward	Round	LED marine light kit and switch only	
<b>Special Options</b>					
Tread Plate Floor Liner			Sound Baffle		
Tread plate installed			(As casing details)		

Unit Sound Power (dB)								
Type	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
Radiated:	86	76	73	77	74	66	49	51
Unit Discharge:	91	81	83	92	90	88	81	74
Unit Return:	86	76	73	77	74	66	49	51

Shipping Section Details									
Section	Length in	Weight lb	Corner Weights (lb)				Center of Gravity (in)		
			P1	P2	P3	P4	XX	YY	ZZ
1	66	1738	423	423	446	446	34	62	46
2	78	5432	1632	1683	1085	1033	30	63	49
3	62	1395	317	317	381	381	34	62	39
4	48	3885	1296	1360	678	614	16	64	48
5	80	4236	1210	1235	908	883	34	63	45
<b>Entire Unit</b>	<b>334</b>	<b>16686</b>	<b>3926</b>	<b>4066</b>	<b>4450</b>	<b>4309</b>	<b>175</b>	<b>63</b>	<b>46</b>

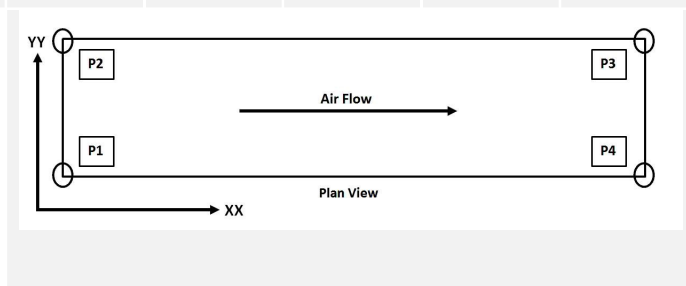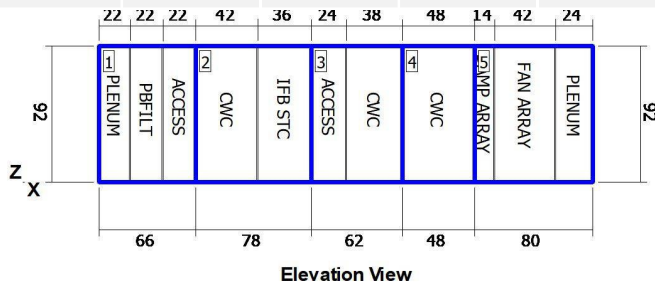

NOTE: Special components aren't included in the corner weights and center of gravity data.

NOTE: Shipping weights listed do not include weight of water (listed in coil section(s) above).


Shipping Protection	Shipping Bag
NOTE: Shipping protection is not meant for long term storage.	
NOTE: In some instances a shipping bag cannot be applied. In these circumstances stretch wrap would be supplied.	

**Supply Static Pressure Drop**

Component	Option	Static Pressure Drop
Plenum Section	Plenum Section	0.06 insWg
Panel and Cartridge Filter	Panel and Cartridge Filter	1.72 insWg
Access Section	Access Section	
Chilled Water coil	Chilled Water coil	0.69 insWg
Steam Face and Bypass Coil	Steam Face and Bypass Coil	0.15 insWg
Access Section	Access Section	
Chilled Water coil	Chilled Water coil	0.20 insWg
Chilled Water coil	Chilled Water coil	1.03 insWg
Damper	Damper	
Supply Fan	Cabinet	0.01 insWg
Plenum Section	Plenum Section	0.24 insWg
External Static	External Static	4.25 insWg
<b>Total Supply Fan Static</b>		<b>8.35 insWg</b>

**Minimum Recommended Drain Pan Trap Dimensions**

Shipping Section	Component	H
2	Chilled Water coil	5.44
3	Chilled Water coil	6.14
4	Chilled Water coil	8.20

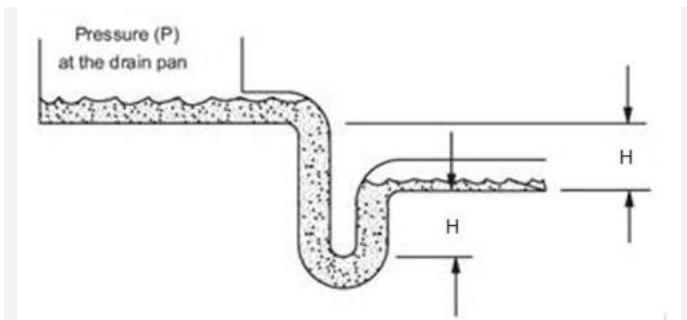

Dimensions provided as a courtesy and are recommended minimums only. Daikin is not responsible for supplying or designing drain pan traps and is not responsible for any damage caused by incorrect trap heights. The dimensions listed above should be reviewed and approved by a licensed plumbing professional.

This calculation is based on an assumption that 0.25 inches of the external static pressure is in the return duct and the remainder is in the supply duct. If actual conditions vary from this assumption then contact Applications for new trap height recommendations.

**AHRI Certification**



Certified by the AHRI Central Station Air-Handling Unit (AHU) Certification Program, which is based on AHRI Standard 430/431. AHRI certified units are subject to rigorous and continuous testing, have performance ratings independently measured and are third-party verified. Certified units may be found in the AHRI Directory at [www.ahridirectory.org](http://www.ahridirectory.org).

**Notes**

**Important**

1. This unit may not meet ASHRAE Standard 90.1 - 2007 fan motor power limitations for the year and system selected. If that code applies, alternate fan selections may be required.
2. The designer and installer must ensure compliance with applicable codes. A component supplier cannot determine the brake horsepower ("BHP") for other motors in the air handling system.
3. Before approving this unit, determine whether ASHRAE Standard 90.1 - 2007 has been adopted in the specific jurisdiction or contract specifications in which the unit will be installed.


BOBKVU

UAMS CAMID

10

11/1/2024

### Daikin AHU Fan Curve

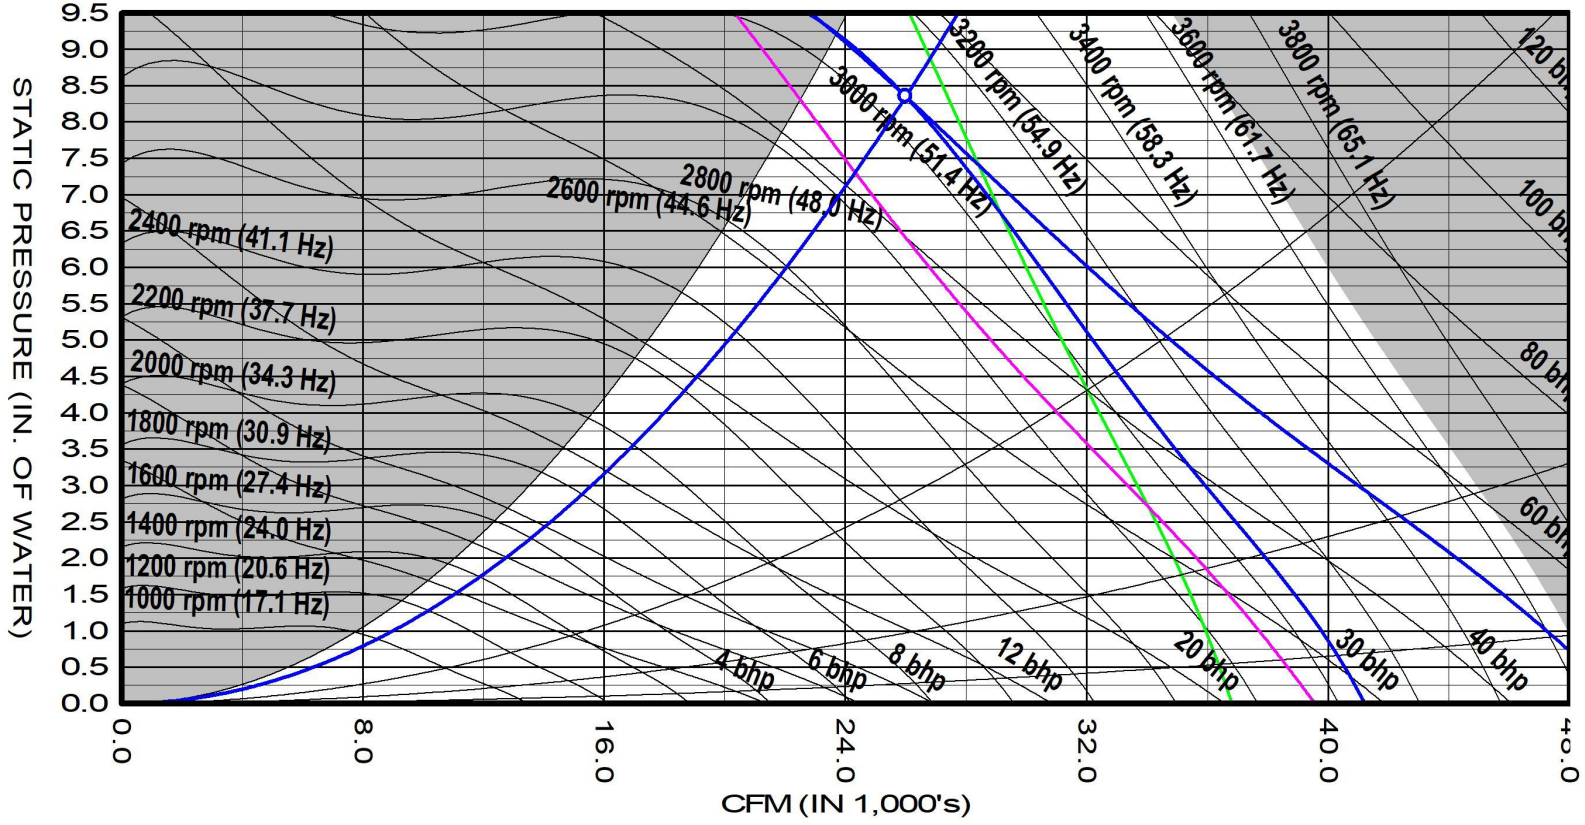

Green line = fan curve for 3 fan(s) at max speed

Red line = BHP curve for 3 fan(s) at max power of selected motor

AF 18 DD PLENUM 12BL (100% Width) 2x2 Supply Fan at Standard Conditions					
Air volume	26000	cfm	Fan speed	3065	rpm
Total static	8.35	insWg	Max speed	3650	rpm
Fan Shaft Power	50.7	bhp	Efficiency	67.4	%
Approx VFD Setting	52.5	Hz	Motor Speed	3500	rpm
Fan Energy Index(FEI)	1.25		Redundancy	93.4	%
Unit tagging	AHU-2		Date	November-01-2024	
Job name	UAMS CAMID		Time	07:13	



Supply fan performance is certified in accordance with the Central Station Air-Handling Unit Certification Program, which is based on AHRI Standard 430.

AHU-2






Fan Curve

B0BKVVU

UAMS CAMID


11

11/1/2024

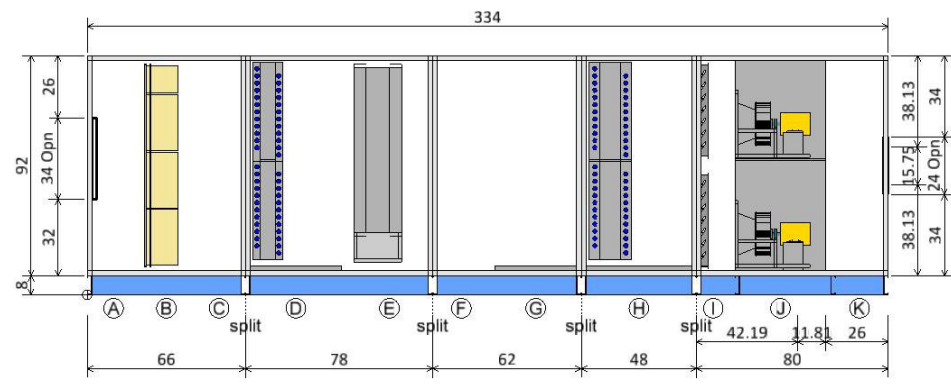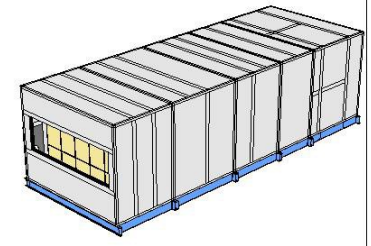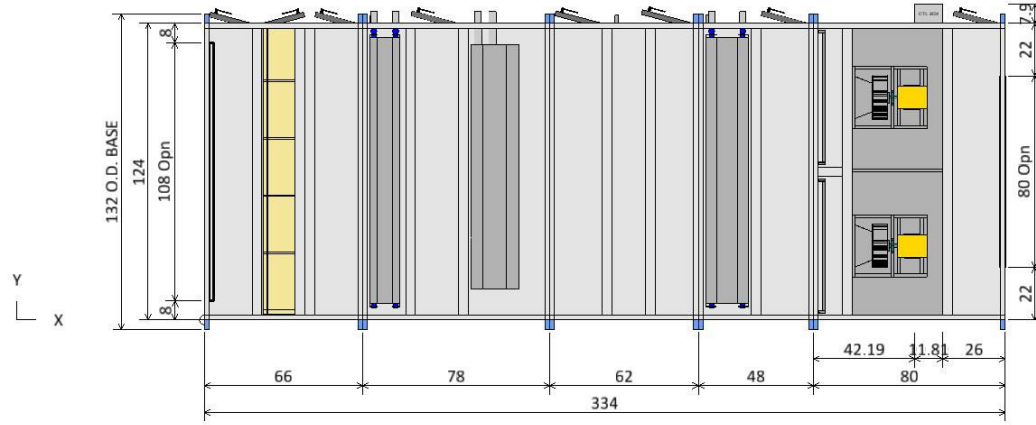

AHU-2

Drawing

Plan/Elevation		Unit Tag: AHU-2		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 <a href="http://www.DaikinApplied.com">www.DaikinApplied.com</a> Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH064GDHM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	


All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

B0BKVU


UAMS CAMID

12

11/1/2024

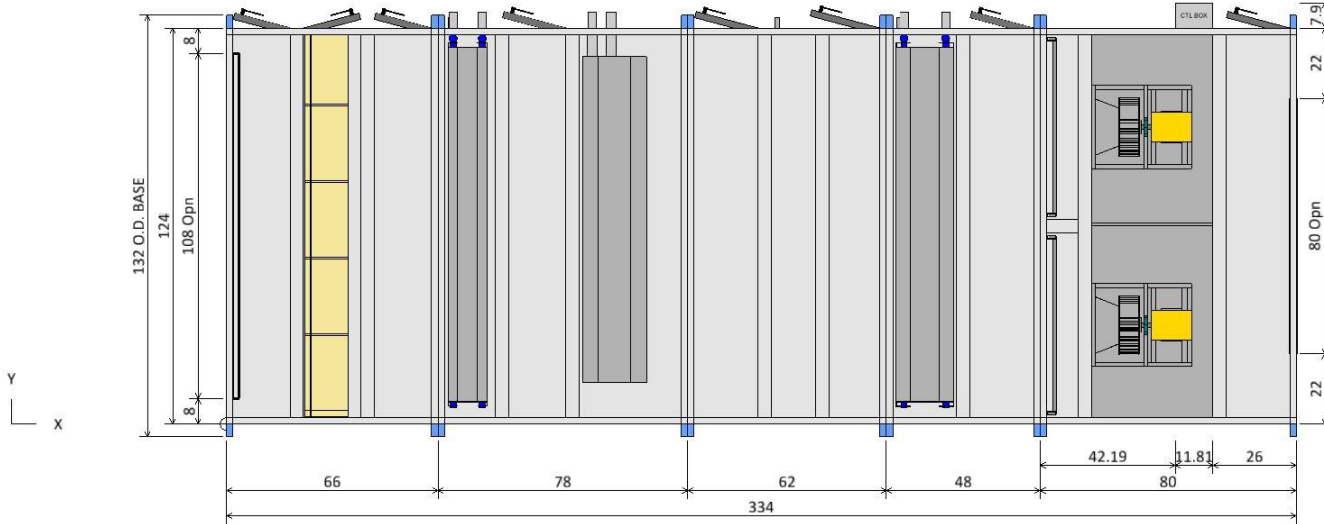

PLAN VIEW

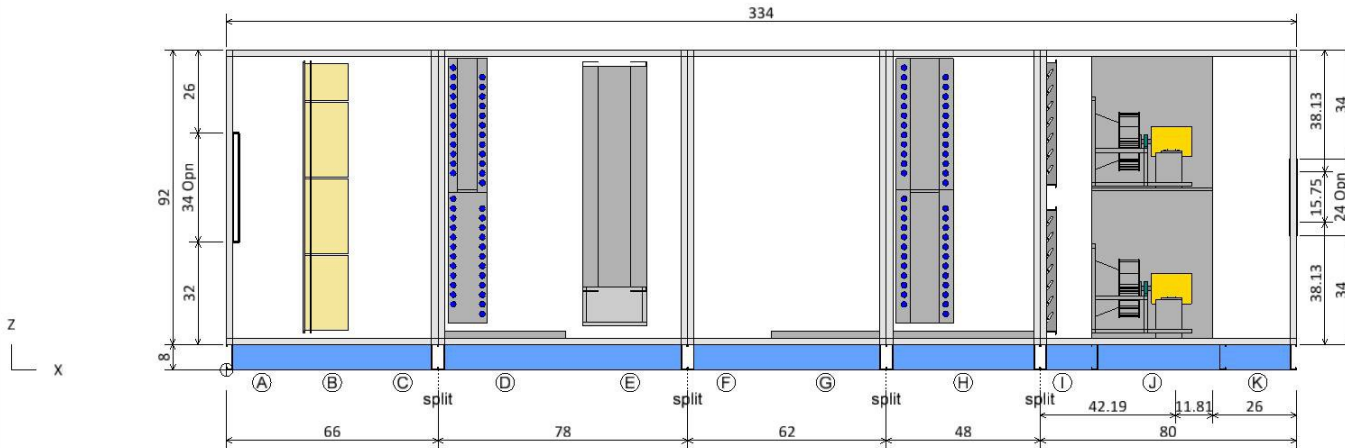


ELEVATION VIEW

Component Key	
(A) Plenum Section	
Left Door (WxH):	18 ins x 48 ins
Panel and Cartridge Filter	
(B) Pre Filter Type:	Pleated (MERV 8)
Cartridge Filter Type:	Varicel VXL
Left Door (WxH):	18 ins x 88 ins
(C) Access Section	
Left Door (WxH):	18 ins x 68 ins
Chilled Water coil	
(D) Coil Model:	5WL1208B
Total Capacity:	356299.0 Btu/hr
Left Door (WxH):	20 ins x 68 ins
(E) Steam Face and Bypass Coil	
Total Capacity:	1546300.0 Btu/hr
(F) Access Section	
Left Door (WxH):	20 ins x 68 ins
Chilled Water coil	
(G) Coil Model:	5WH0002C
Total Capacity:	0.0 Btu/hr
Left Door (WxH):	22 ins x 68 ins
Chilled Water coil	
(H) Coil Model:	5WD0812B
Total Capacity:	2244626.0 Btu/hr
Left Door (WxH):	20 ins x 68 ins
(I) Damper	
Supply Fan	
Fan Type:	Centrifugal - Plenum
Fan Size (Class):	18 (2)
(J) Air Flowrate:	6500.0 cfm
T.S.P.:	8.3 insWg
Motor Power:	15.0 HP
(K) Plenum Section	
Left Door (WxH):	20 ins x 48 ins

AHU-2

Drawing


<b>Plan/Elevation - No Ends</b>		Unit Tag: AHU-2		Sales Office: Harrison Energy Partners		 13600 Industrial Park Blvd, Minneapolis, MN 55441 www.DaikinApplied.com Software Version: 13.43	
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH064GDHM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"		
All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.							

B0BKVU


UAMS CAMID

13

11/1/2024

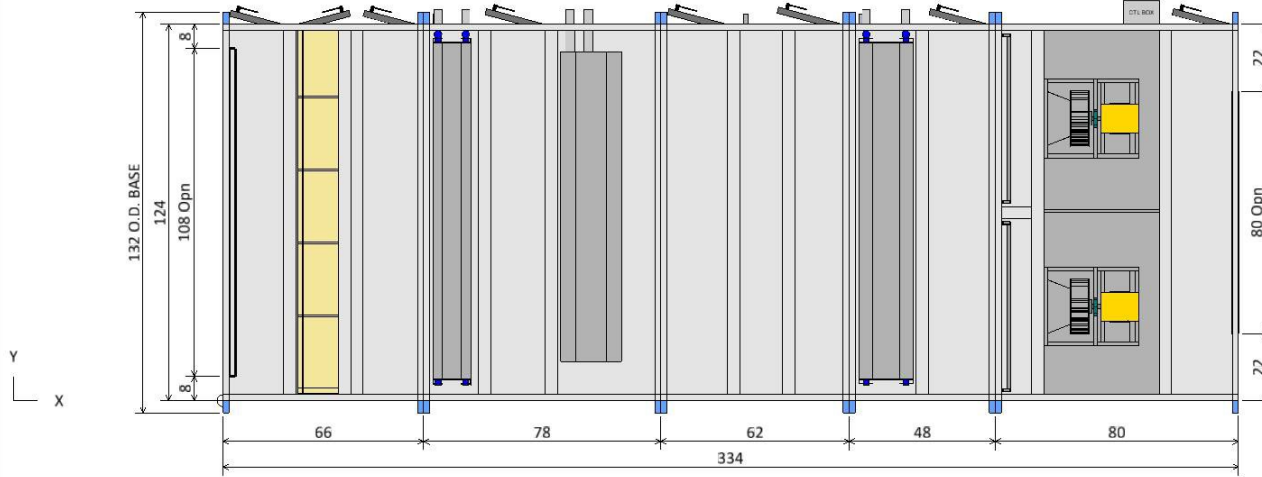

PLAN VIEW

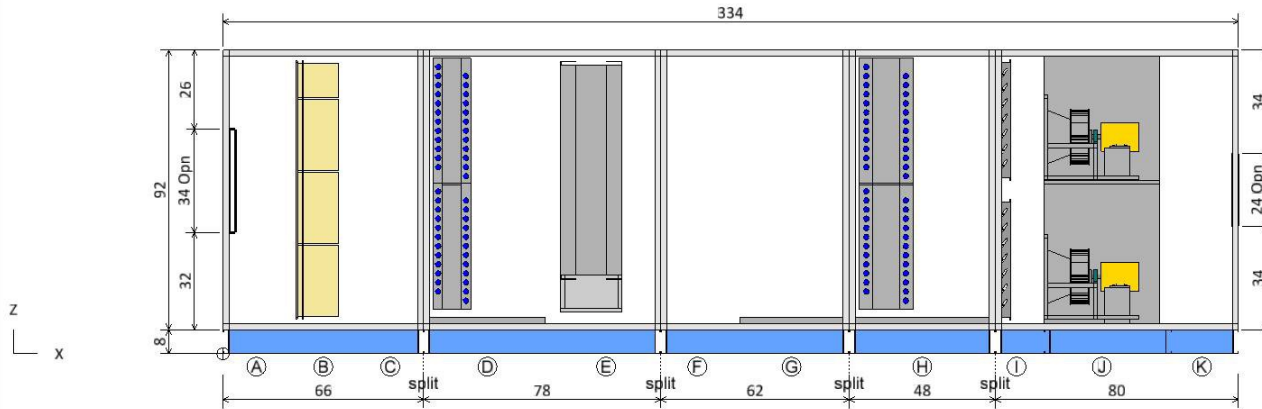


ELEVATION VIEW

Component Key					
Type	X	Y	Z	Wid	Hgt
Ⓐ Plenum Section Opening	0.00	8.00	40.00	108.00	34.00
Ⓚ Plenum Section Opening	334.00	22.00	42.00	80.00	24.00

Note: Dimensions are measured from the origin point.  
 Note: Openings with or without dampers are recessed into the unit by approximately 1.75 in.

AHU-2

Drawing


<b>Opening/Damper Connections</b>		Unit Tag: AHU-2		Sales Office: Harrison Energy Partners		 13600 Industrial Park Blvd, Minneapolis, MN 55441 www.DaikinApplied.com Software Version: 13.43	
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH064GDHM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"		
All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.							

BOBKVU

UAMS CAMID

14

11/1/2024

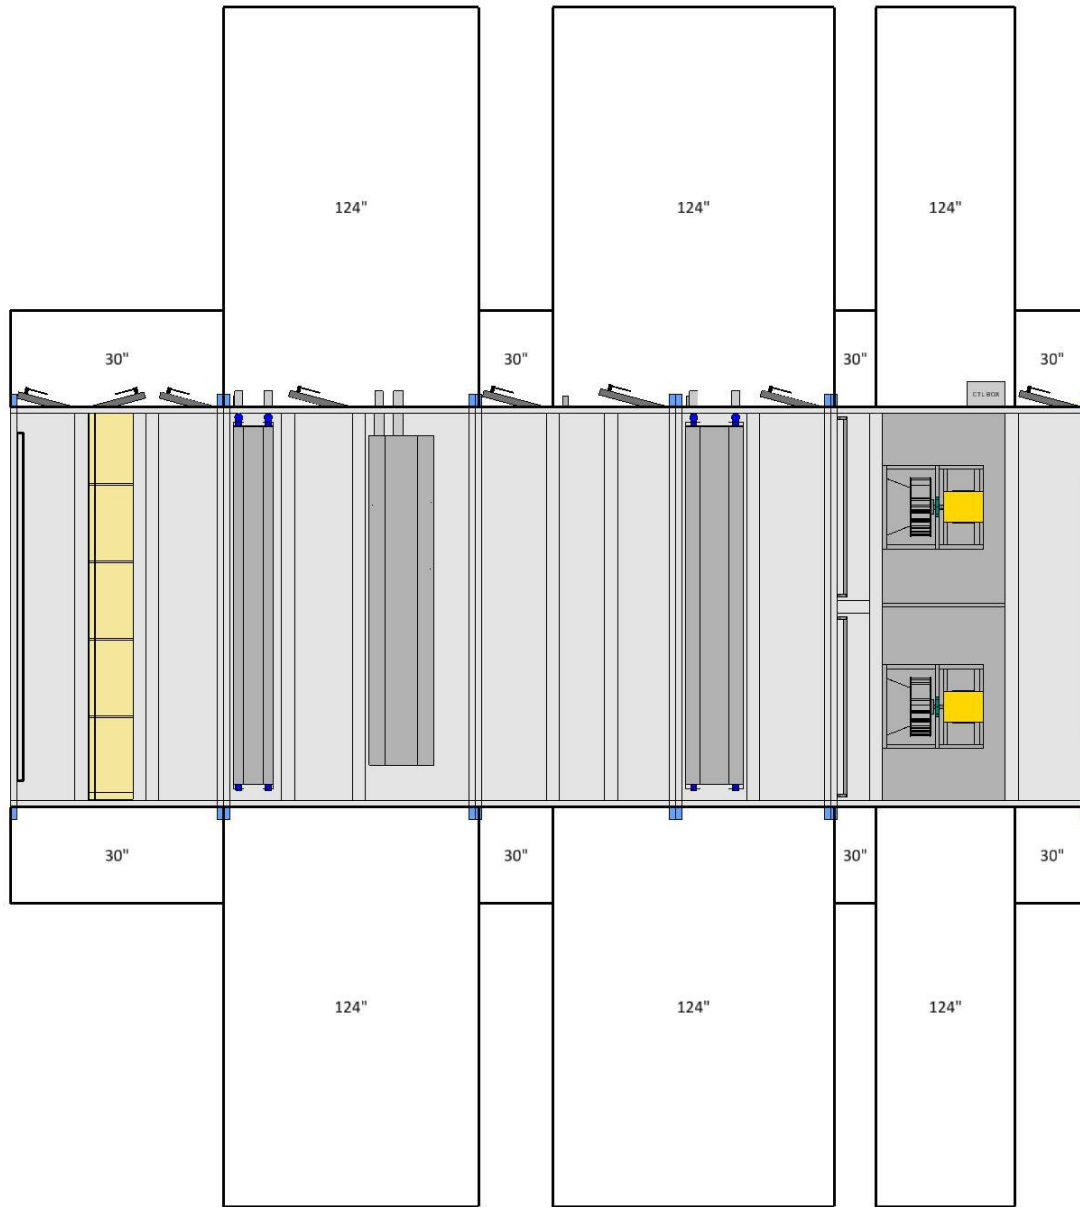

Notes


Check local electrical component service clearance codes for specific distances.

Access is only required on one side of the unit.

AHU-2

Drawing

PLAN VIEW


<b>Service Clearance View</b>		Unit Tag: AHU-2		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 <a href="http://www.DaikinApplied.com">www.DaikinApplied.com</a> Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH064GDHM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	
All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.							

BOBKVU


UAMS CAMID

15

11/1/2024

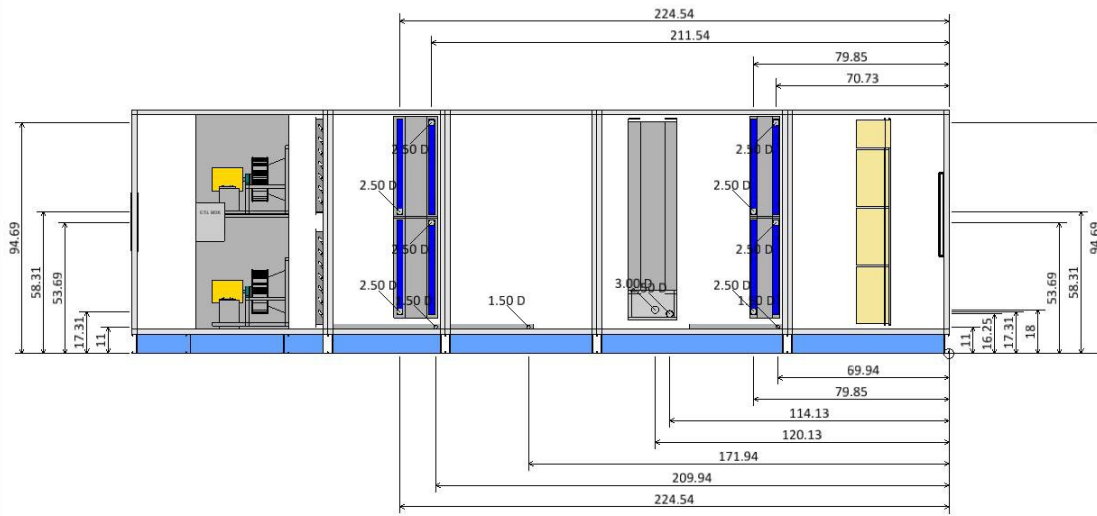

LEFT ELEVATION VIEW

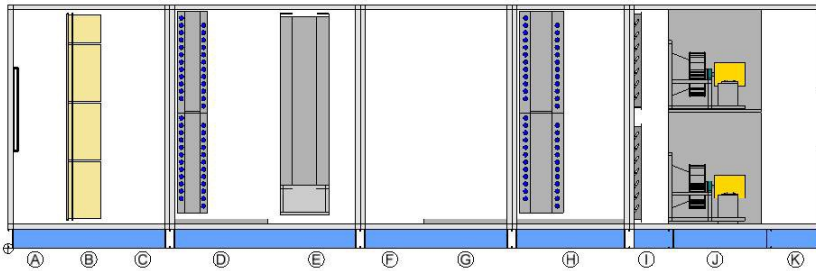

RIGHT ELEVATION VIEW


Coil and Drain Connections

Type	X	Y	Z	Diam
Chilled Water coil				
Condensate drain conn:	69.94	127.40	11.00	1.50
Cold water inlet:	79.85	129.00	17.31	2.50
Cold water outlet:	70.73	129.00	53.69	2.50
Cold water inlet:	79.85	129.00	58.31	2.50
Cold water outlet:	70.73	129.00	94.69	2.50
Steam Face and Bypass Coil				
Steam inlet:	120.13	129.00	18.00	3.00
Steam outlet:	114.13	129.00	16.25	2.50
Chilled Water coil				
Condensate drain conn:	171.94	127.40	11.00	1.50
Chilled Water coil				
Condensate drain conn:	209.94	127.40	11.00	1.50
Cold water inlet:	224.54	129.00	17.31	2.50
Cold water outlet:	211.54	129.00	53.69	2.50
Cold water inlet:	224.54	129.00	58.31	2.50
Cold water outlet:	211.54	129.00	94.69	2.50

Note: Dimensions are measured from the origin point.

AHU-2

Drawing

<b>Coil and Drain Connections</b>		Unit Tag: AHU-2		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 www.DaikinApplied.com Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH064GDHM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	

All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.




BOBKVU


UAMS CAMID

16

11/1/2024

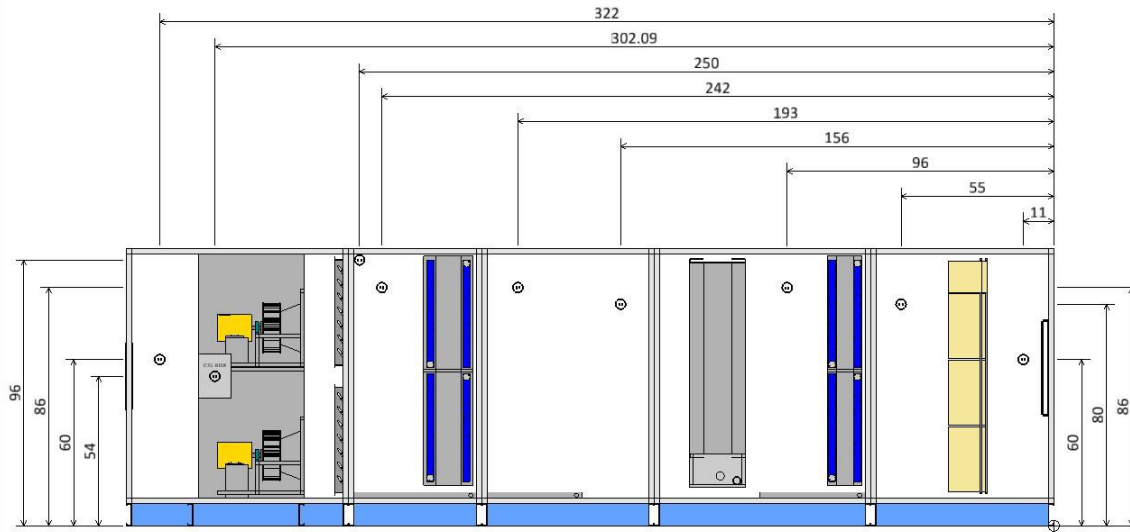

LEFT ELEVATION VIEW

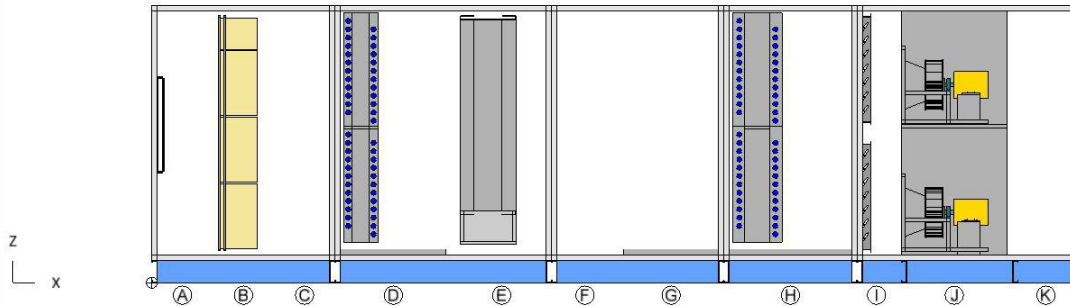

RIGHT ELEVATION VIEW


Component Key

Type	X	Y	Z	Volts	Phase
(A) Plenum Section LED Marine Light	11.00	124.00	60.00	110	1
(C) Access Section LED Marine Light	55.00	124.00	80.00	110	1
(D) Chilled Water coil LED Marine Light	96.00	124.00	86.00	110	1
(F) Access Section LED Marine Light GFI	156.00	124.00	80.00	110	1
(G) Chilled Water coil LED Marine Light GFI	193.00	124.00	86.00	110	1
(H) Chilled Water coil LED Marine Light UVC Light	242.00 250.00	124.00 122.00	86.00 96.00	110 115	1 1
(J) Supply Fan Fan	302.09	124.00	54.00	460	3
(K) Plenum Section LED Marine Light	322.00	124.00	60.00	110	1

Note: Dimensions are measured from the origin point.

AHU-2

Drawing

<b>Electrical Connections</b>		Unit Tag: AHU-2		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 www.DaikinApplied.com Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH064GDHM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	


All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

BOBKVU

UAMS CAMID

17

11/1/2024

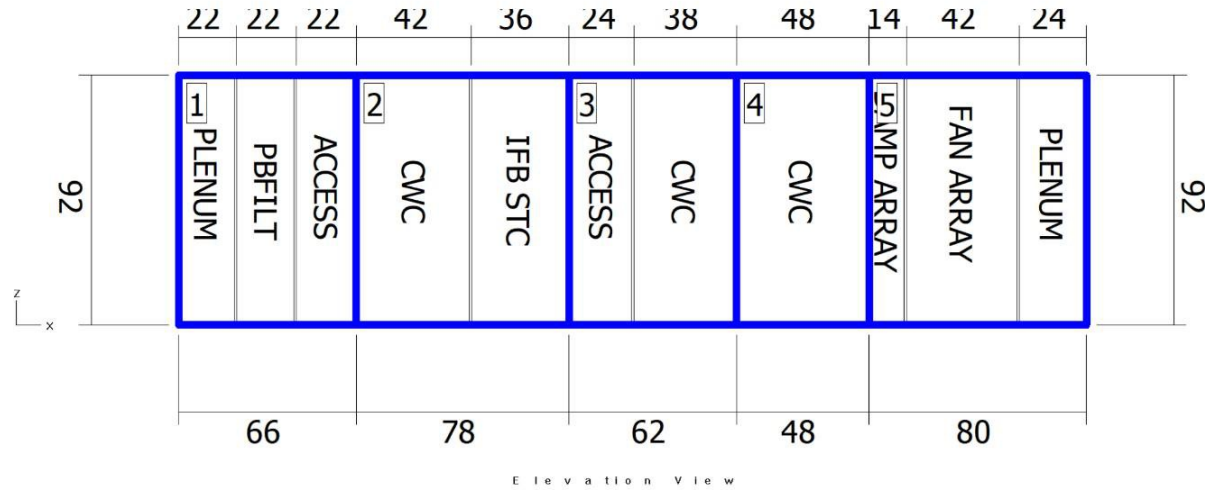


Shipping Sections				
Section	Weight (lb)	X	Y	Z
Section 1	1737.72	66	124	92
Section 2	5431.78	78	124	92
Section 3	1395.43	62	124	92
Section 4	3885.11	48	124	92
Section 5	4235.50	80	124	92
<b>Total Unit</b>	<b>16685.55</b>	<b>334</b>	<b>124</b>	<b>92</b>

Note: Base rails, curb ready base, coil connectors, drain connectors, and control boxes not included in height X, Y, Z dimensions. Shipping section may be 2" longer in air flow direction due to internal splice joint.

AHU-2

Drawing

<b>Shipping Sections</b>		Unit Tag: AHU-2		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 www.DaikinApplied.com    Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH064GDHM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	


All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

BOBKVU

UAMS CAMID


18

11/1/2024

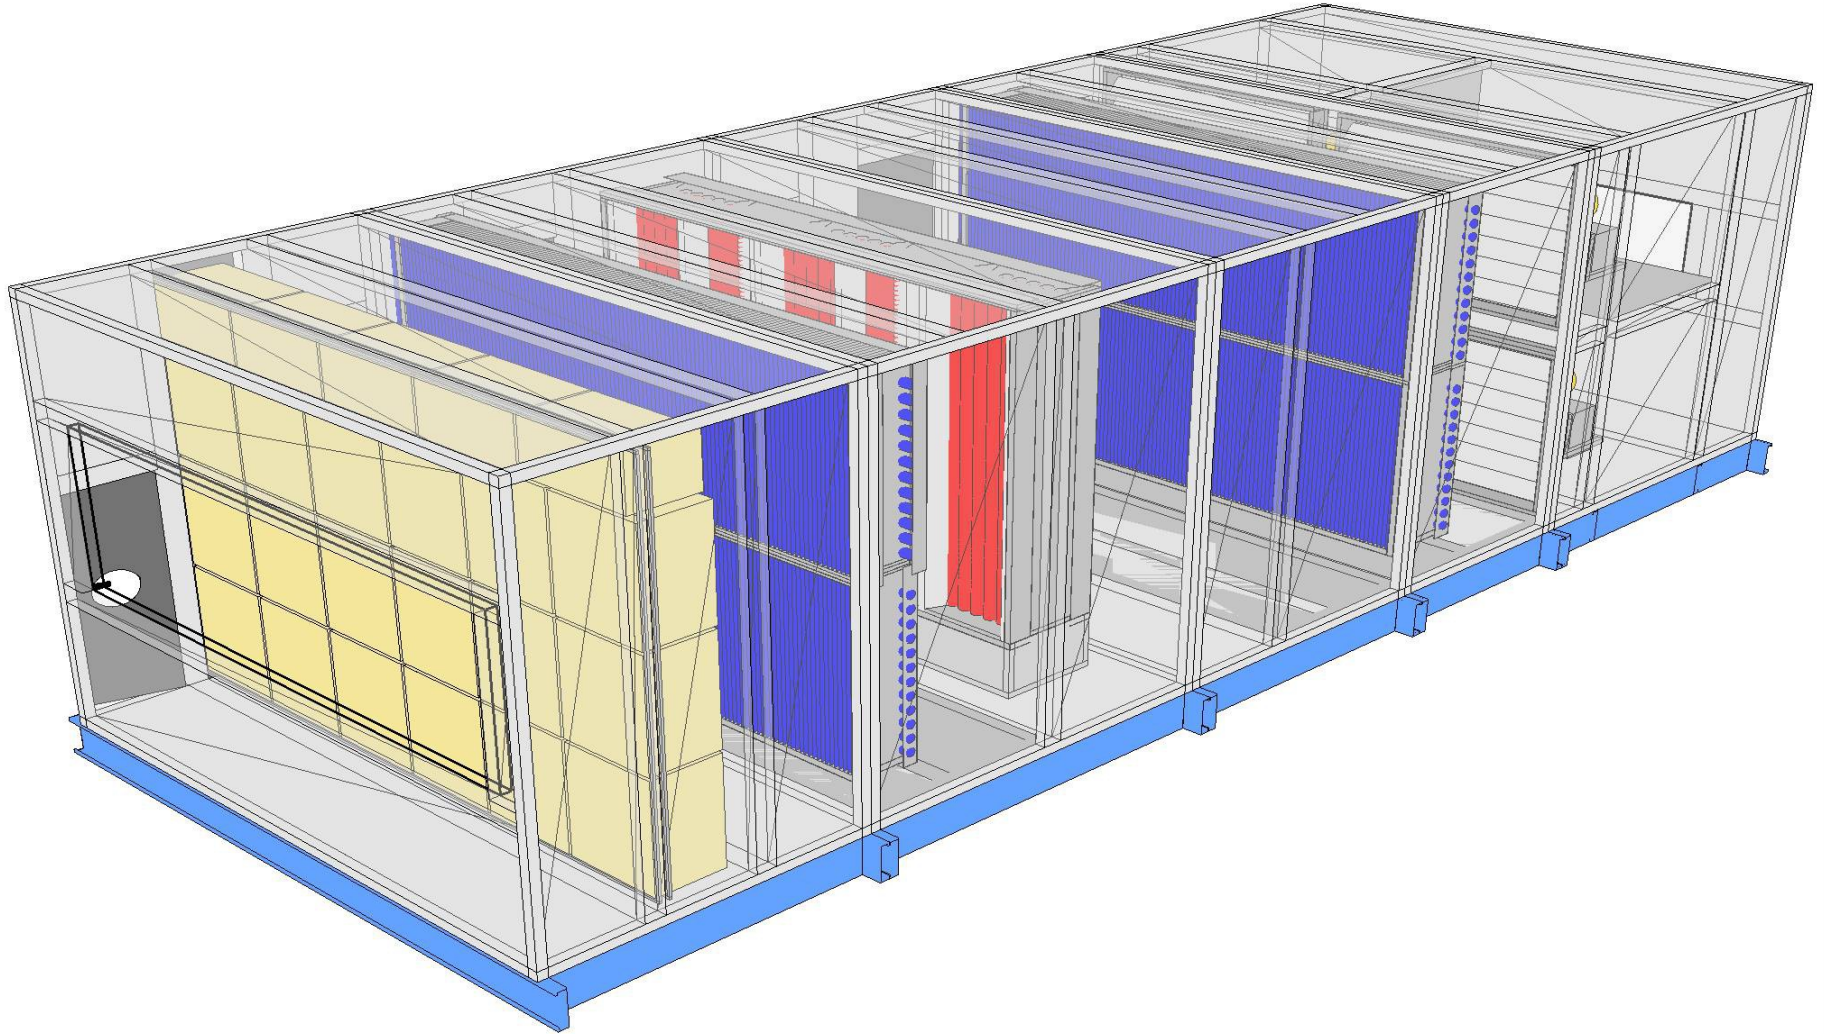

AHU-2

Drawing

<b>Product Drawing</b>		Unit Tag: AHU-2		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 <a href="http://www.DaikinApplied.com">www.DaikinApplied.com</a> Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH064GDHM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	
All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.							




## SUBMITTAL DATA

Job Name	UAMS CAMID
For	
Sold To	
Prepared For	
Customer PO#	
Prepared By	Jake Skinner
Date	11/1/2024

## Table of Contents

Daikin Section Divider	3
Technical Data Sheet - AHU-5 Stacked	4
Fan Curve - AHU-5 Stacked	15
Drawing - AHU-5 Stacked	17

Job Information		Technical Data Sheet	
Job Name	UAMS CAMID		
Date	November 01 2024		
Submitted By	JS		
Software Version	13.43		
Unit Tag	AHU-5 Stacked		



**Unit Overview**

Model Number	Supply						Return/Exhaust					
	Air Volume cfm	Static Pressure		External Dimensions			Air Volume cfm	Static Pressure		External Dimensions		
		External inWc	Total inWc	Height in	Width in	Length in		External inWc	Total inWc	Height in	Width in	Length in
CAH011GDGM	3870	3.00	6.90	52*	48*	304	3870	3.00	7.07	52*	48*	304

\*Not including base rails, coil connectors, drain connectors and control boxes.

**Unit**

<b>Model Number:</b>	CAH011GDGM		
<b>Approval:</b>	ETL Listed / ETL Listed to Canadian Safety Standards (ETL Label / ETLc Label)		
<b>Construction:</b>	High pressure low leakage construction		
<b>Outer Panel:</b>	24 gauge G90 Galvanized Steel (unpainted)		
<b>Liner:</b>	24 gauge Galvanized Steel (unless noted per section)		
<b>Insulation:</b>	R-13 Injected Foam		
<b>Unit Configuration:</b>	Stacked with parallel air flows	<b>Drive (Handling) Location:</b>	Right
<b>Base:</b>	8" formed channel	<b>Wall Thickness:</b>	2 in
<b>Altitude:</b>	0 ft	<b>Parts Warranty:</b>	Standard One Year

**Plenum Section**      Component: 1      Length: 24 in      Shipping Section: 1

<b>Air Pressure Drop</b>				
0.12 inWc				
<b>Custom Openings</b>				
Custom Opening	Location	Width	Height	Rainhood w/Screen
1	End	20 in	20 in	None
<b>Door</b>				
Location	Width	Opening		
Drive side	20 in	Outward		

**Access Section**      Component: 2      Length: 24 in      Shipping Section: 1

<b>Air Pressure Drop</b>			
0.00 inWc			
<b>Door</b>			
Location	Width	Opening	
Drive side	20 in	Outward	

AHU-5 Stacked

Technical Data Sheet

Combination Filter			Component: 3				Length: 16 in		Shipping Section: 1		
Access			Face Velocity				Face Area		Air Volume		
Front			558 ft/min				6.9 ft²		3870 cfm		
Portion	Type	Efficiency	Air Pressure Drop				Number of Filters	Height	Width	Depth	
			Clean Air	Mean Air	Dirty Air	User Spec					
Pre-Filter	Pleated	MERV 8	0.27 inWc	0.63 inWc	1.00 inWc	N/A	1	24 in	24 in	2 in	
							1	20 in	24 in	2 in	
Filter	Varicel VXL cartridge	MERV 15	0.45 inWc	1.22 inWc	2.00 inWc	N/A	1	24 in	24 in	12 in	
							1	20 in	24 in	12 in	
Special Options											
Sound Baffle						Filter Gauge					
(As casing details)						Minihelic II 0-5"					

Access Section			Component: 4				Length: 22 in		Shipping Section: 1		
Air Pressure Drop											
0.00 inWc											
Door											
Location			Width		Opening		Window Type		Light		
Drive side			14 in		Outward		Round		LED marine light kit and switch only		

Chilled Water Coil			Component: 5				Length: 28 in		Shipping Section: 1			
Coil Model		Total Capacity	Sensible Capacity	Number of Coils		Number of Rows		Fins per Inch		Tube Diameter	Tube Spacing (Face x Row)	
5WL1208B		54152 Btu/hr	54152 Btu/hr	1		8		12		0.625 in	1.50 in x 1.299 in	
Air Volume	Air Temperature				Coil Air Pressure Drop	Finned Height	Finned Length	Face Area	Face Velocity			
	Entering		Leaving									
3870 cfm	Dry Bulb	Wet Bulb	Dry Bulb	Wet Bulb	0.56 inWc	42 in	35 in	10.21 ft²	379 ft/min			
	99.6 °F	77.2 °F	86.8 °F	73.7 °F								
Fluid		Flow Rate		Pressure Drop		Velocity		Volume		Weight		
Entering		Leaving		35.10 gpm		4.60 ftHd		1.80 ft/s		12.0 gal	103.00 lb	
85.9 °F		89.1 °F										
Connection [Data Per Coil]					Glycol Type		Min. Fin Surface Temp.		Min. Tube Wall Surface Temp.		Fouling Factor	
Type	Size	Location		Material		Propylene (30%)		85.9 °F		85.9 °F		0.000
Threaded	2.50 in	Drive side		Carbon steel								
Material						Drain Pan		Drain Side		Turbospiral		
Fin	Tube	Header		Case		Stainless steel		Drive side		Yes		
Aluminum .0075 in	Copper .020 in	Copper		Galv. steel								
AHRI 410 Certification												
Coil is NOT certified by AHRI												
Door												
Location			Width		Opening		Light					
Drive side			8 in		Outward		LED marine light kit and switch only					

AHU-5 Stacked

Technical Data Sheet

<b>IFB Steam Coil</b>		Component: 6		Length: 36 in		Shipping Section: 2	
Coil Model	Total Capacity	Number of Coils	Number of Rows	Fins per Inch	Tube Diameter	Tube Spacing (Face x Row)	
HMX8AS45.927.02	240300 Btu/hr	1	2	8	0.625 in	1.50 in x 1.299 in	
Air Volume	Air Temperature		Coil Air Pressure Drop	Finned Height	Finned Length	Face Area	Face Velocity
	Entering Dry Bulb	Leaving Dry Bulb					
3870 cfm	17.6 °F	75.1 °F	0.17 inWc	43 in	27 in	8.05 ft²	488 ft/min
Fluid					Max. Superheat Temp. in Steam Coil Inlet		
Steam Pressure		Condensate Load		30.0 °F			
15.00 psig		248.68 lb/hr					
Connection [Data Per Coil]							
Type	Steam Size	Condensate Size	Location		Material		
Threaded	2.50 in	2.50 in	Drive side		Carbon steel		
Material							
Fin	Tube	Header		Case			
Aluminum .0075 in	Copper .035 in	Carbon Steel		Galv. steel			

<b>Access Section</b>		Component: 7		Length: 24 in		Shipping Section: 2	
Air Pressure Drop							
0.00 inWc							
Door							
Location	Width	Opening	Window Type	Light			
Drive side	16 in	Outward	Round	LED marine light kit with GFI outlet			


<b>Future Chilled Water Coil</b>		Component: 8		Length: 28 in		Shipping Section: 2	
Number of Coils				Number of Rows			
1				2			
Coil Air Pressure Drop	Finned Height	Finned Width	Face Area	Face Velocity			
0.10 inWc	42 in	35 in	10.21 ft²	379 ft/min			
Connection Location				Connection Material			
Drive side				Carbon steel			
Coil Model	Drain Pan		Drain Pan Side				
Future Coil (Not Supplied)	Stainless steel		Drive side				
AHRI 410 Certification							
Coil is NOT certified by AHRI							
Door							
Location	Width	Opening	Light				
Drive side	14 in	Outward	LED marine light kit and switch only				

Humidifier Section.  
Humidifier manifold to be factory installed. Performance data is located at the end of this submittal.



AHU-5 Stacked

Technical Data Sheet

Chilled Water Coil		Component: 9			Length: 40 in		Shipping Section: 2		
Coil Model	Total Capacity	Sensible Capacity	Number of Coils		Number of Rows	Fins per Inch	Tube Diameter	Tube Spacing (Face x Row)	
5WH1008C	326506 Btu/hr	198084 Btu/hr	1		8	10	0.625 in	1.50 in x 1.299 in	
Air Volume	Air Temperature				Coil Air Pressure Drop	Finned Height	Finned Length	Face Area	Face Velocity
	Entering		Leaving						
	Dry Bulb	Wet Bulb	Dry Bulb	Wet Bulb					
3870 cfm	99.6 °F	77.2 °F	52.8 °F	52.6 °F	1.21 inWc	42 in	35 in	10.21 ft²	379 ft/min
Water		Flow Rate		Pressure Drop	Velocity	Volume		Weight	
Entering		Leaving							
45.0 °F		60.1 °F		43.30 gpm	8.90 ftHd	3.30 ft/s		12.0 gal	
Connection [Data Per Coil]					Min. Fin Surface Temp.	Min. Tube Wall Surface Temp.	Fouling Factor		
Type	Size	Location	Material						
Threaded	2.00 in	Drive side	Carbon steel		45.0 °F	45.0 °F	0.000		
Material						Drain Pan		Drain Side	
Fin	Tube	Header	Case						
Aluminum .0075 in	Copper .020 in	Copper	Galv. steel			Stainless steel		Drive side	
<b>AHRI 410 Certification</b>									
 Certified in accordance with the AHRI Forced-Circulation Air-Cooling and Air-Heating Coils Certification Program which is based on AHRI Standard 410 within the Range of Standard Rating Conditions listed in Table 1 of the Standard. Certified units may be found in the AHRI Directory at <a href="http://www.ahridirectory.org">www.ahridirectory.org</a>									
<b>Door</b>									
Location		Width		Opening		Window Type		Light	
Drive side		20 in		Outward		Round		LED marine light kit and switch only	

Return/Exhaust Fan		Component: 10			Length: 38 in		Shipping Section: 3		
<b>Fan Performance</b>									
Air Volume	Static Pressure			Fan Energy Index(FEI)	Total Input Power	Fan Shaft Power	Speed		Outlet Velocity
	External	Total	Cabinet				Operating	Maximum	
3870 cfm	3.00 inWc	7.07 inWc	0.00 inWc	1.11	6.2 kW	6.95 BHP	3199 rpm	3650 rpm	0 ft/min
<b>Fan Data</b>									
Fan Type	Blade Type / Class	Nominal Fan Size	Quantity of Fans	Wheel Diameter	Material Type	Number of Blades	Discharge	Motor Location	
Centrifugal - Plenum	Airfoil / 2	DDPL16	1	15.75 in	Aluminum	12	Axial	Behind Fan	
<b>Motor Data</b>									
Power	Electrical Supply	Speed	Efficiency	Enclosure	Frame Size	Supplier	Number of Poles	Lock Rotor Current	Full Load Current
10.0 HP	460/60/3 V/Hz/Phase	3500 rpm	Premium	ODP	213 T frame	Generic	2	74.01 A	12.00 A
<b>Fan Options</b>									
Piezometer Ring:		Provided on Drive Side Fan			Piezometer Delta P:		6.87		
Shaft Grounding Kit:		Provided			Isolator Type:		Spring		
<b>VFD/Starter/Disconnect Data</b>									
Selection Type:		External J-Box			Vendor:		Factory Standard		
VFD Power:		10 HP			Voltage:		460 v		
Height x Width x Depth:		6.00 in x 6.00 in x 4.00 in			Mounting:		Door Side		
Enclosure:		NEMA 1							
<b>Door</b>									
Location			Width			Opening			
Drive side			22 in			Outward			

AHU-5 Stacked

Technical Data Sheet

Plenum Section		Component: 11		Length: 24 in		Shipping Section: 3	
<b>Air Pressure Drop</b>							
0.05 inWc							
<b>Custom Dampers</b>							
Custom Damper	Damper Type	Location	Size (Width x Height)		Material	Blade Action	Rainhood w/Screen
			Overall	Opening			
1	CBD6-OUT	End	32 in x 16 in	29 in x 13 in	Alum	Parallel	None
<b>Door</b>							
Location		Width	Opening		Window Type	Light	
Drive side		20 in	Outward		Round	LED marine light kit and switch only	

Plenum Section		Component: 12		Length: 24 in		Shipping Section: 4	
<b>Air Pressure Drop</b>							
0.12 inWc							
<b>Custom Openings</b>							
Custom Opening		Location	Width	Height	Rainhood w/Screen		
1		End	20 in	20 in	None		
<b>Door</b>							
Location		Width	Opening				
Drive side		20 in	Outward				

Access Section		Component: 13		Length: 24 in		Shipping Section: 4	
<b>Air Pressure Drop</b>							
0.00 inWc							
<b>Door</b>							
Location		Width	Opening				
Drive side		20 in	Outward				

Combination Filter		Component: 14		Length: 16 in		Shipping Section: 4				
Access		Face Velocity		Face Area		Air Volume				
Front		558 ft/min		6.9 ft²		3870 cfm				
Portion	Type	Efficiency	Air Pressure Drop				Number of Filters	Height	Width	Depth
			Clean Air	Mean Air	Dirty Air	User Spec				
Pre-Filter	Pleated	MERV 8	0.27 inWc	<b>0.63</b> inWc	1.00 inWc	N/A	1	24 in	24 in	2 in
							1	20 in	24 in	2 in
Filter	Varicel VXL cartridge	MERV 15	0.45 inWc	<b>1.22</b> inWc	2.00 inWc	N/A	1	24 in	24 in	12 in
							1	20 in	24 in	12 in
<b>Special Options</b>										
Sound Baffle						Filter Gauge				
(As casing details)						Magnehelic 0-5"				

Access Section		Component: 15		Length: 22 in		Shipping Section: 4	
<b>Air Pressure Drop</b>							
0.00 inWc							
<b>Door</b>							
Location		Width	Opening		Window Type	Light	
Drive side		14 in	Outward		Round	LED marine light kit and switch only	

AHU-5 Stacked

Technical Data Sheet

Chilled Water Coil		Component: 16			Length: 28 in		Shipping Section: 4		
Coil Model	Total Capacity	Sensible Capacity	Number of Coils		Number of Rows	Fins per Inch	Tube Diameter	Tube Spacing (Face x Row)	
5WL1208B	54152 Btu/hr	54152 Btu/hr	1		8	12	0.625 in	1.50 in x 1.299 in	
Air Volume	Air Temperature				Coil Air Pressure Drop	Finned Height	Finned Length	Face Area	Face Velocity
	Entering		Leaving						
	Dry Bulb	Wet Bulb	Dry Bulb	Wet Bulb					
3870 cfm	99.6 °F	77.2 °F	86.8 °F	73.7 °F	0.56 inWc	42 in	35 in	10.21 ft²	379 ft/min
Fluid		Flow Rate		Pressure Drop	Velocity	Volume		Weight	
Entering		Leaving							
85.9 °F		89.1 °F		35.10 gpm	4.60 ftHd	1.80 ft/s		12.0 gal	
Connection [Data Per Coil]					Glycol Type	Min. Fin Surface Temp.	Min. Tube Wall Surface Temp.	Fouling Factor	
Type	Size	Location	Material						
Threaded	2.50 in	Drive side	Carbon steel		Propylene (30%)	85.9 °F	85.9 °F	0.000	
Material					Drain Pan	Drain Side	Turbospiral		
Fin	Tube	Header	Case						
Aluminum .0075 in	Copper .020 in	Copper	Galv. steel		Stainless steel	Drive side	Yes		
AHRI 410 Certification									
Coil is NOT certified by AHRI									
Door									
Location		Width			Opening		Light		
Drive side		8 in			Outward		LED marine light kit and switch only		

Manual Component		Component: 17			Length: 36 in		Shipping Section: 5		
Pressure Drop									
0.00 inWc									
Panel									
Location		Width			Opening		Light		
Removable panels		- in			Outward				


Access Section		Component: 18			Length: 24 in		Shipping Section: 5		
Air Pressure Drop									
0.00 inWc									
Door									
Location		Width			Opening		Window Type		Light
Drive side		16 in			Outward		Round		LED marine light kit with GFI outlet

IFB Coil Section.  
 IFB coil in this section will be identical to the IFB coil in the bottom section of the air handler (component 6)

AHU-5 Stacked

Technical Data Sheet

<b>Future Chilled Water Coil</b>		Component: 19	Length: 28 in	Shipping Section: 5
Number of Coils		Number of Rows		
1		2		
Coil Air Pressure Drop	Finned Height	Finned Width	Face Area	Face Velocity
0.10 inWc	42 in	35 in	10.21 ft <sup>2</sup>	379 ft/min
Connection Location		Connection Material		
Drive side		Carbon steel		
Coil Model		Drain Pan	Drain Pan Side	
Future Coil (Not Supplied)		Stainless steel	Drive side	
AHRI 410 Certification				
Coil is NOT certified by AHRI				
Door				
Location	Width	Opening	Light	
Drive side	14 in	Outward	LED marine light kit and switch only	

<b>Chilled Water Coil</b>		Component: 20		Length: 40 in	Shipping Section: 5				
Coil Model	Total Capacity	Sensible Capacity	Number of Coils	Number of Rows	Fins per Inch	Tube Diameter	Tube Spacing (Face x Row)		
5WH1008C	326506 Btu/hr	198084 Btu/hr	1	8	10	0.625 in	1.50 in x 1.299 in		
Air Volume	Air Temperature				Coil Air Pressure Drop	Finned Height	Finned Length	Face Area	Face Velocity
	Entering		Leaving						
	Dry Bulb	Wet Bulb	Dry Bulb	Wet Bulb					
3870 cfm	99.6 °F	77.2 °F	52.8 °F	52.6 °F	1.21 inWc	42 in	35 in	10.21 ft <sup>2</sup>	379 ft/min
Water		Flow Rate	Pressure Drop	Velocity	Volume	Weight			
Entering	Leaving								
45.0 °F	60.1 °F	43.30 gpm	8.90 ftHd	3.30 ft/s	12.0 gal	101.00 lb			
Connection [Data Per Coil]					Min. Fin Surface Temp.	Min. Tube Wall Surface Temp.	Fouling Factor		
Type	Size	Location	Material						
Threaded	2.00 in	Drive side	Carbon steel		45.0 °F	45.0 °F	0.000		
Material					Drain Pan		Drain Side		
Fin	Tube	Header	Case						
Aluminum .0075 in	Copper .020 in	Copper	Galv. steel		Stainless steel		Drive side		
AHRI 410 Certification									
 Certified in accordance with the AHRI Forced-Circulation Air-Cooling and Air-Heating Coils Certification Program which is based on AHRI Standard 410 within the Range of Standard Rating Conditions listed in Table 1 of the Standard. Certified units may be found in the AHRI Directory at <a href="http://www.ahridirectory.org">www.ahridirectory.org</a>									
Door									
Location	Width	Opening	Window Type	Light					
Drive side	20 in	Outward	Round	LED marine light kit and switch only					

Humidifier Section.  
 Humidifier manifold to be factory installed. Performance data is located at the end of this submittal.

AHU-5 Stacked

Technical Data Sheet

<b>Supply Fan</b>	Component: 21	Length: 38 in	Shipping Section: 6
-------------------	---------------	---------------	---------------------

**Fan Performance**

Air Volume	Static Pressure			Fan Energy Index(FEI)	Total Input Power	Fan Shaft Power	Speed		Outlet Velocity
	External	Total	Cabinet				Operating	Maximum	
3870 cfm	3.00 inWc	6.90 inWc	0.00 inWc	1.11	6.1 kW	6.79 BHP	3174 rpm	3650 rpm	0 ft/min

**Fan Data**

Fan Type	Blade Type / Class	Nominal Fan Size	Quantity of Fans	Wheel Diameter	Material Type	Number of Blades	Discharge	Motor Location
Centrifugal - Plenum	Airfoil / 2	DDPL16	1	15.75 in	Aluminum	12	Axial	Behind Fan

**Motor Data**

Power	Electrical Supply	Speed	Efficiency	Enclosure	Frame Size	Supplier	Number of Poles	Lock Rotor Current	Full Load Current
10.0 HP	460/60/3 V/Hz/Phase	3500 rpm	Premium	ODP	213 T frame	Generic	2	74.01 A	12.00 A

**Fan Options**

<b>Piezometer Ring:</b>	Provided on Drive Side Fan	<b>Piezometer Delta P:</b>	6.87
<b>Shaft Grounding Kit:</b>	Provided	<b>Isolator Type:</b>	Spring

**VFD/Starter/Disconnect Data**

<b>Selection Type:</b>	External J-Box	<b>Vendor:</b>	Factory Standard
<b>VFD Power:</b>	10 HP	<b>Voltage:</b>	460 v
<b>Height x Width x Depth:</b>	6.00 in x 6.00 in x 4.00 in	<b>Mounting:</b>	Door Side
<b>Enclosure:</b>	NEMA 1		

**Door**

Location	Width	Opening
Drive side	22 in	Outward

<b>Plenum Section</b>	Component: 22	Length: 24 in	Shipping Section: 6
-----------------------	---------------	---------------	---------------------

**Air Pressure Drop**

0.05 inWc
-----------

**Custom Dampers**

Custom Damper	Damper Type	Location	Size (Width x Height)		Material	Blade Action	Rainhood w/Screen
			Overall	Opening			
1	CBD6-OUT	End	32 in x 16 in	29 in x 13 in	Alum	Parallel	None

**Door**

Location	Width	Opening	Window Type	Light
Drive side	20 in	Outward	Round	LED marine light kit and switch only



**Unit Sound Power (dB)**

Type	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
<b>Radiated:</b>	84	75	66	74	68	62	51	51
<b>Unit Discharge:</b>	84	77	75	82	81	81	80	71
<b>Unit Return:</b>	84	75	66	74	68	62	51	51

**Shipping Section Details**

Section	Length in	Weight lb	Corner Weights (lb)				Center of Gravity (in)		
			P1	P2	P3	P4	XX	YY	ZZ
1	114	1441	282	256	439	465	71	23	30
2	128	1843	472	448	451	474	64	23	28
3	62	771	232	228	154	157	25	24	27
4	114	1249	234	208	391	417	74	23	33
5	128	1255	253	229	376	399	79	23	32
6	62	677	208	205	130	134	24	24	30
<b>Entire Unit</b>	<b>304</b>	<b>7236</b>	<b>n/a</b>	<b>n/a</b>	<b>n/a</b>	<b>n/a</b>	<b>n/a</b>	<b>n/a</b>	<b>n/a</b>

*Lower level only*

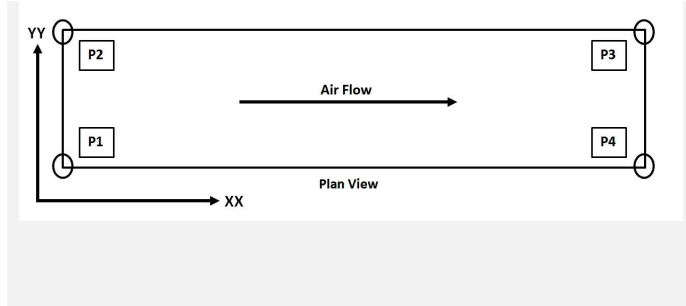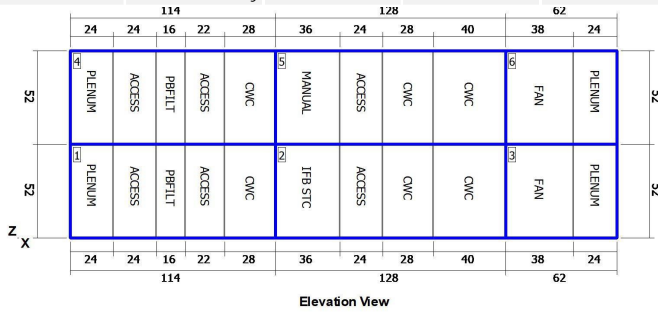

NOTE: Special components aren't included in the corner weights and center of gravity data.

NOTE: Shipping weights listed do not include weight of water (listed in coil section(s) above).

**Shipping Protection**

None

**Supply Static Pressure Drop**


Component	Option	Static Pressure Drop
Plenum Section	Plenum Section	0.12 insWg
Access Section	Access Section	
Panel and Cartridge Filter	Panel and Cartridge Filter	1.86 insWg
Access Section	Access Section	
Chilled Water coil	Chilled Water coil	0.56 insWg
Manual Section	Manual Section	
Access Section	Access Section	
Chilled Water coil	Chilled Water coil	0.10 insWg
Chilled Water coil	Chilled Water coil	1.21 insWg
Supply Fan	Cabinet	
Plenum Section	Plenum Section	0.05 insWg
External Static	External Static	3.00 insWg
<b>Total Supply Fan Static</b>		<b>6.90 insWg</b>

**Exhaust Static Pressure Drop**

Component	Option	Static Pressure Drop
Plenum Section	Plenum Section	0.12 insWg
Access Section	Access Section	
Panel and Cartridge Filter	Panel and Cartridge Filter	1.86 insWg
Access Section	Access Section	
Chilled Water coil	Chilled Water coil	0.56 insWg
Steam Face and Bypass Coil	Steam Face and Bypass Coil	0.17 insWg
Access Section	Access Section	
Chilled Water coil	Chilled Water coil	0.10 insWg
Chilled Water coil	Chilled Water coil	1.21 insWg
Return Fan	Cabinet	
Plenum Section	Plenum Section	0.05 insWg
External Static	External Static	3.00 insWg
<b>Total Return/Exhaust Fan Static</b>		<b>7.07 insWg</b>

**Minimum Recommended Drain Pan Trap Dimensions**

Shipping Section	Component	H
1	Chilled Water coil	11.08
2	Chilled Water coil	11.62
2	Chilled Water coil	14.04
4	Chilled Water coil	5.08
5	Chilled Water coil	5.28
5	Chilled Water coil	7.70

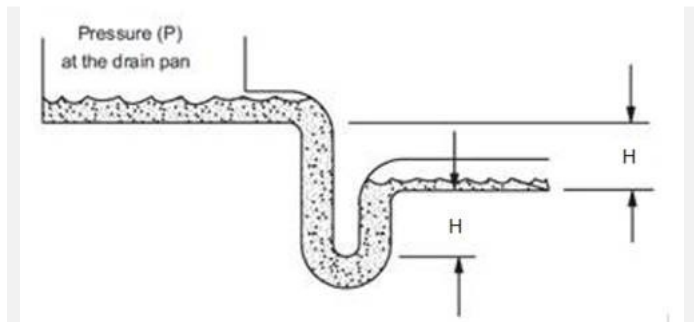

Dimensions provided as a courtesy and are recommended minimums only. Daikin is not responsible for supplying or designing drain pan traps and is not responsible for any damage caused by incorrect trap heights. The dimensions listed above should be reviewed and approved by a licensed plumbing professional.

**AHRI Certification**



Certified by the AHRI Central Station Air-Handling Unit (AHU) Certification Program, which is based on AHRI Standard 430/431. AHRI certified units are subject to rigorous and continuous testing, have performance ratings independently measured and are third-party verified. Certified units may be found in the AHRI Directory at [www.ahridirectory.org](http://www.ahridirectory.org).

**Notes****Important**

1. This unit may not meet ASHRAE Standard 90.1 - 2007 fan motor power limitations for the year and system selected. If that code applies, alternate fan selections may be required.
2. The designer and installer must ensure compliance with applicable codes. A component supplier cannot determine the brake horsepower ("BHP") for other motors in the air handling system.
3. Before approving this unit, determine whether ASHRAE Standard 90.1 - 2007 has been adopted in the specific jurisdiction or contract specifications in which the unit will be installed.




BOBKVU

UAMS CAMID

15

11/1/2024

### Daikin AHU Fan Curve

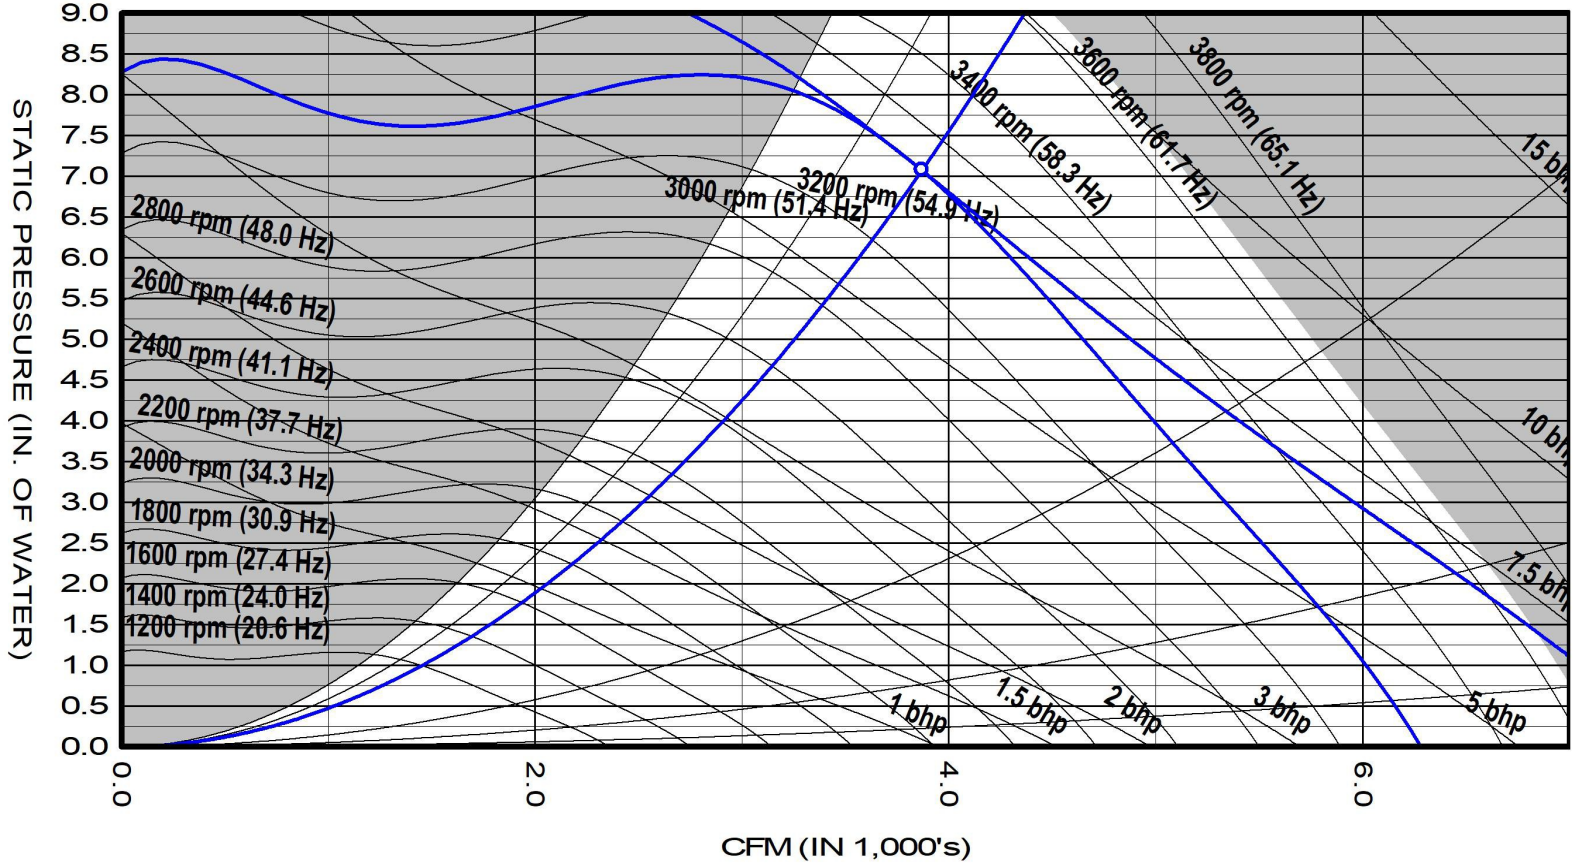

AHU-5 Stacked

Fan Curve

AF 16 DD PLENUM 12BL (100% Width) 1x1 Ret/Exh Fan at Standard Conditions					
Air volume	3870	cfm	Fan speed	3199	rpm
Total static	7.07	insWg	Max speed	3650	rpm
Fan Shaft Power	7.0	bhp	Efficiency	61.9	%
Approx VFD Setting	54.8	Hz	Motor Speed	3500	rpm
Fan Energy Index(FEI)	1.11				
Unit tagging	AHU-5 Stacked		Date	November-01-2024	
Job name	UAMS CAMID		Time	07:13	


BOBKVU

UAMS CAMID

16

11/1/2024

Daikin AHU Fan Curve

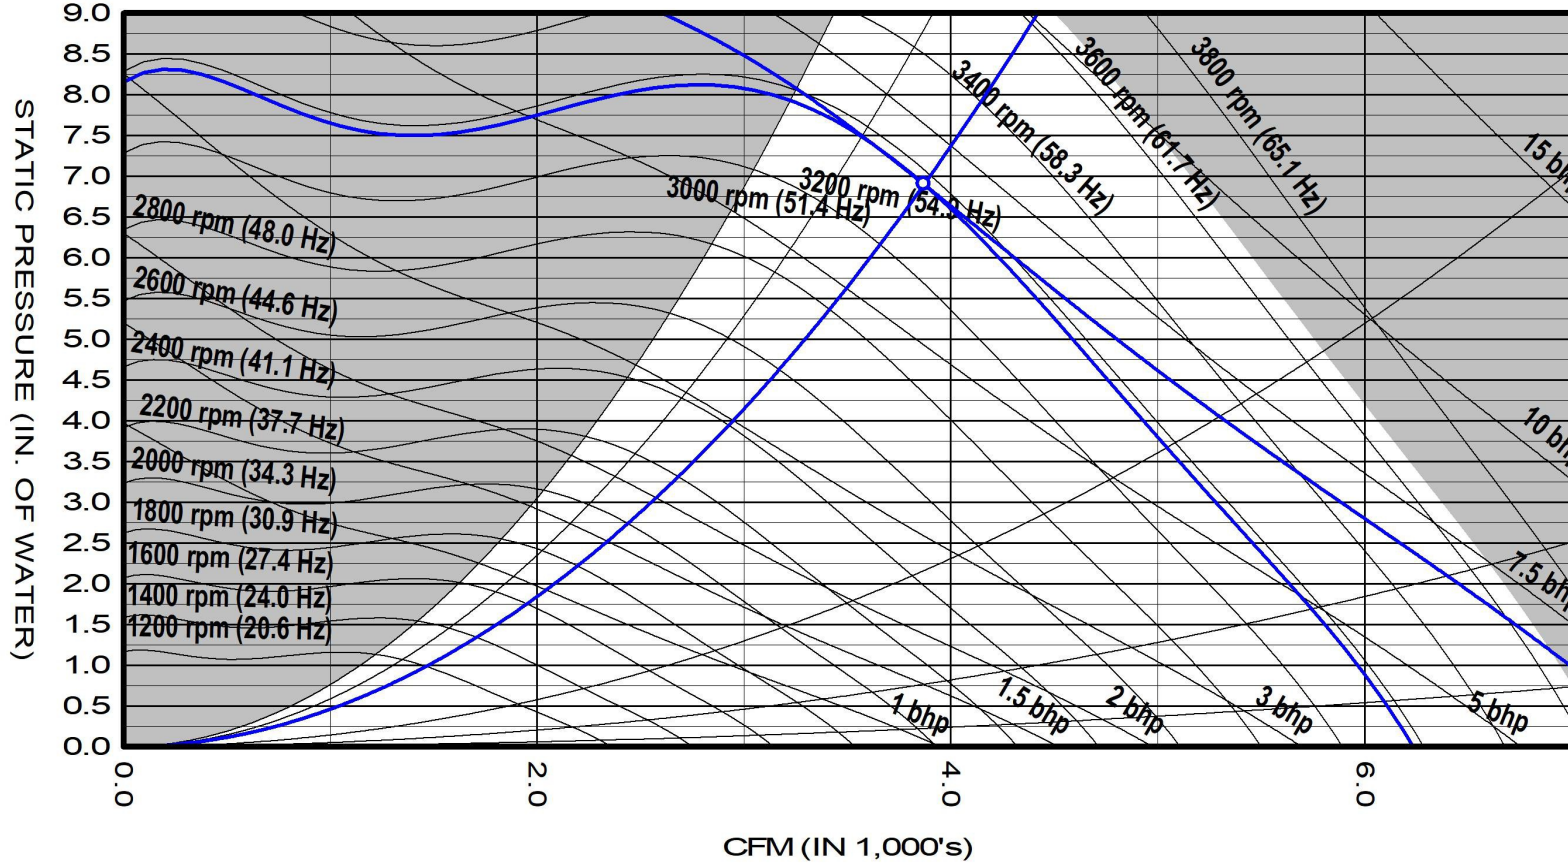

AHU-5 Stacked

Fan Curve

AF 16 DD PLENUM 12BL (100% Width) 1x1 Supply Fan at Standard Conditions					
Air volume	3870	cfm	Fan speed	3174	rpm
Total static	6.90	insWg	Max speed	3650	rpm
Fan Shaft Power	6.8	bhp	Efficiency	61.8	%
Approx VFD Setting	54.4	Hz	Motor Speed	3500	rpm
Fan Energy Index(FEI)	1.11				
Unit tagging	AHU-5 Stacked		Date	November-01-2024	
Job name	UAMS CAMID		Time	07:13	




Supply fan performance is certified in accordance with the Central Station Air-Handling Unit Certification Program, which is based on AHRI Standard 430.

BOBKVVU


UAMS CAMID

17


11/1/2024

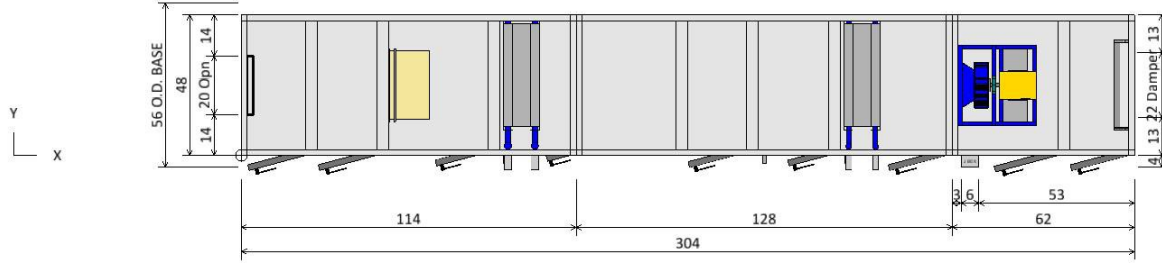


TOP DECK PLAN VIEW

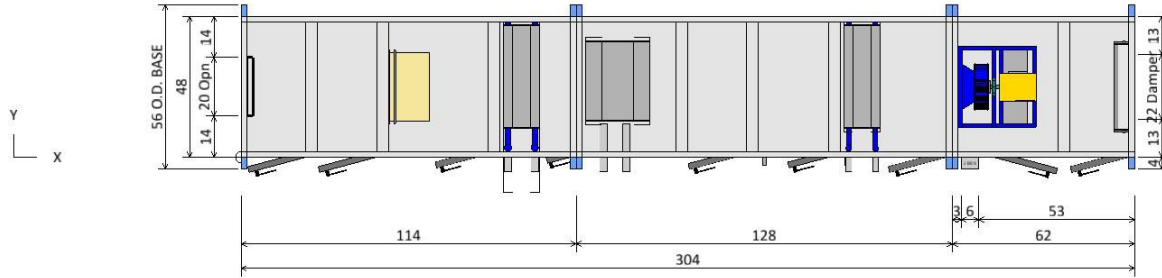


BOTTOM DECK PLAN VIEW




ISOMETRIC VIEW



FRONT END VIEW

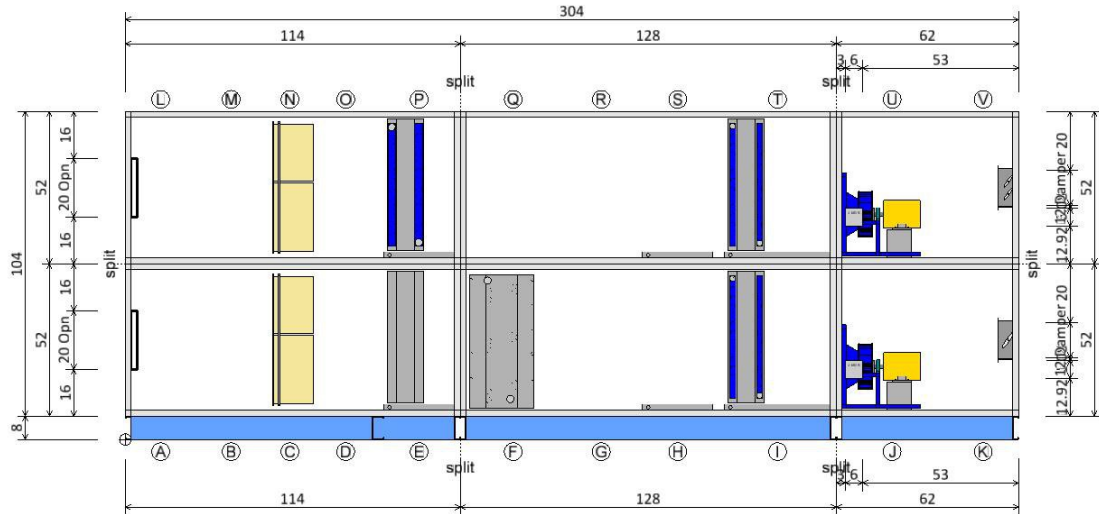


ELEVATION VIEW



REAR END VIEW

AHU-5 Stacked

Drawing

<b>Product Drawing</b>		Unit Tag: AHU-5 Stacked		Sales Office: Harrison Energy Partners		 13600 Industrial Park Blvd, Minneapolis, MN 55441 <a href="http://www.DaikinApplied.com">www.DaikinApplied.com</a> Software Version: 13.43	
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH01GDGM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"		


All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

BOBKVU


UAMS CAMID

18


11/1/2024

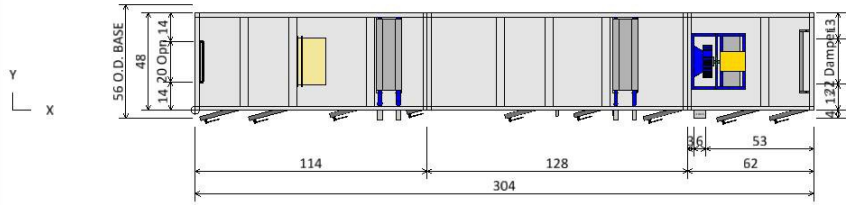

TOP DECK PLAN VIEW

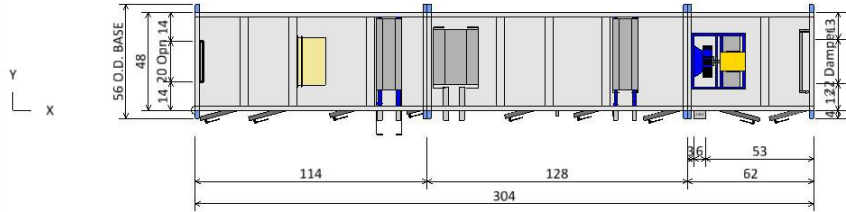

BOTTOM DECK PLAN VIEW

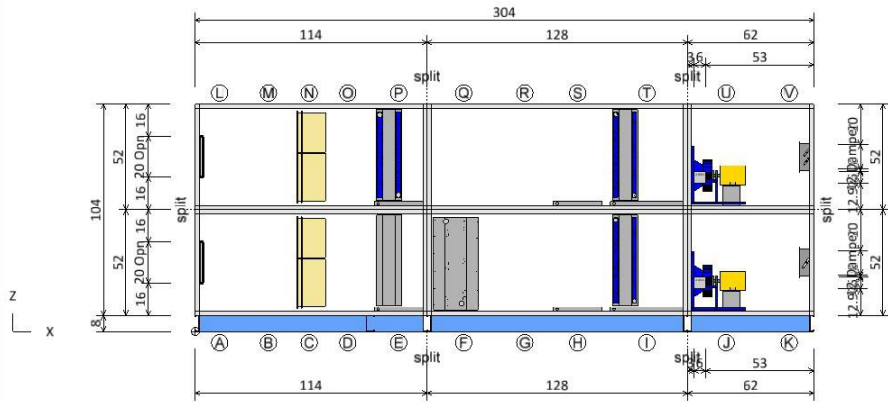


ELEVATION VIEW

Component Key

(A) Plenum Section Right Door (WxH): 20 ins x 48 ins	(T) Chilled Water coil Coil Model: 5WH1008C Total Capacity: 326506.0 Btu/hr Right Door (WxH): 20 ins x 38 ins
(B) Access Section Right Door (WxH): 20 ins x 48 ins	
(C) Panel and Cartridge Filter Pre Filter Type: Pleated (MERV 8) Cartridge Filter Type: Varicel VXL	(U) Supply Fan Fan Type: Centrifugal - Plenum Fan Size (Class): 16 (2) Air Flowrate: 3870.0 cfm T.S.P.: 6.9 insWg Motor Power: 10.0 HP
(D) Access Section Right Door (WxH): 14 ins x 48 ins	
(E) Chilled Water coil Coil Model: 5WL1208B Total Capacity: 54152.0 Btu/hr Right Door (WxH): 8 ins x 38 ins	(V) Plenum Section Right Door (WxH): 20 ins x 44 ins
(F) Steam Face and Bypass Coil Total Capacity: 240300.0 Btu/hr	
(G) Access Section Right Door (WxH): 16 ins x 48 ins	(I) Chilled Water coil Coil Model: 5WH1008C Total Capacity: 326506.0 Btu/hr Right Door (WxH): 20 ins x 38 ins
(H) Chilled Water coil Coil Model: 5WH0002C Total Capacity: 0.0 Btu/hr Right Door (WxH): 14 ins x 38 ins	
(J) Return Fan Fan Type: Centrifugal - Plenum Fan Size (Class): 16 (2) Air Flowrate: 3870.0 cfm T.S.P.: 7.1 insWg Motor Power: 10.0 HP Right Door (WxH): 22 ins x 48 ins	(K) Plenum Section Right Door (WxH): 20 ins x 44 ins
(L) Plenum Section Right Door (WxH): 20 ins x 48 ins	
(M) Access Section Right Door (WxH): 20 ins x 48 ins	(O) Access Section Right Door (WxH): 14 ins x 48 ins
(N) Panel and Cartridge Filter Pre Filter Type: Pleated (MERV 8) Cartridge Filter Type: Varicel VXL	
(P) Chilled Water coil Coil Model: 5WL1208B Total Capacity: 54152.0 Btu/hr Right Door (WxH): 8 ins x 38 ins	(Q) Manual Section
(R) Access Section Right Door (WxH): 16 ins x 48 ins	
(S) Chilled Water coil Coil Model: 5WH0002C Total Capacity: 0.0 Btu/hr Right Door (WxH): 14 ins x 38 ins	

AHU-5 Stacked

Drawing

<b>Product Drawing</b>		Unit Tag: AHU-5 Stacked		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 www.DaikinApplied.com Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH011GDGM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	


All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

B0BKVU


UAMS CAMID

19

11/1/2024

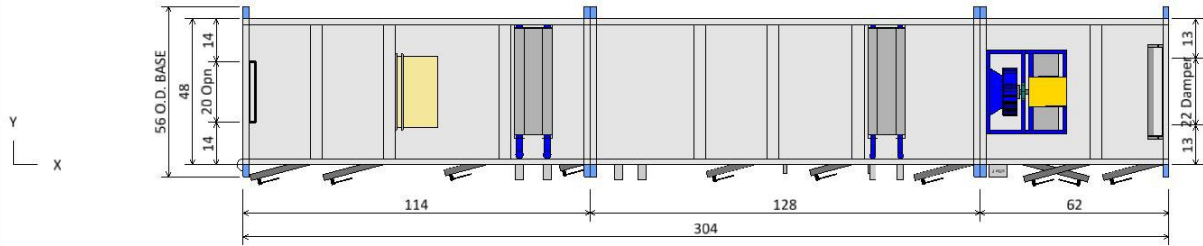

PLAN VIEW

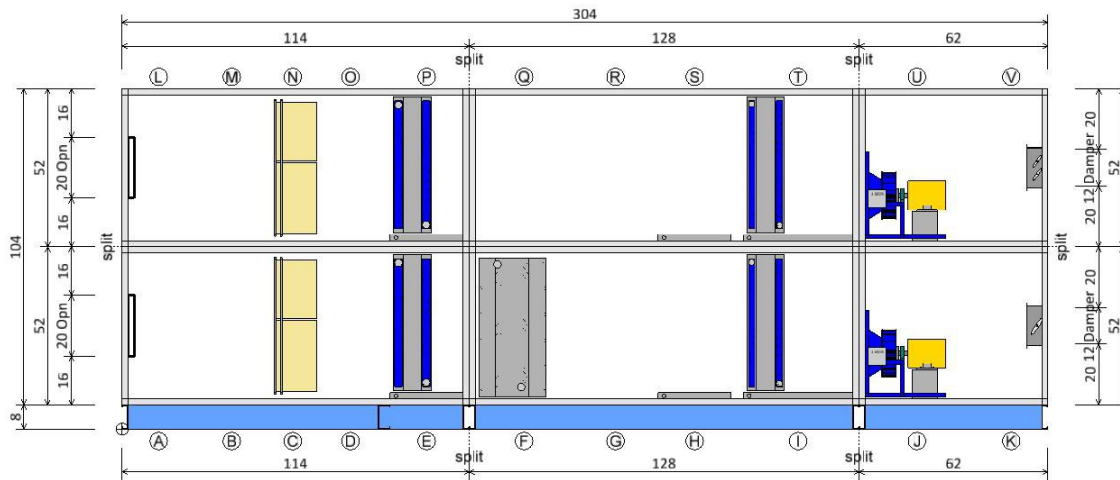

ELEVATION VIEW


Component Key

Type	X	Y	Z	Wid	Hgt
Ⓐ Plenum Section Opening	0.00	14.00	24.00	20.00	20.00
Ⓚ Plenum Section Supply air damper	304.00	9.50	27.50	29.00	13.00
Ⓛ Plenum Section Opening	0.00	14.00	76.00	20.00	20.00
Ⓥ Plenum Section Supply air damper	304.00	9.50	79.50	29.00	13.00

Note: Dimensions are measured from the origin point.  
 Note: Openings with or without dampers are recessed into the unit by approximately 1.75 in.

AHU-5 Stacked

Drawing

<b>Opening/Damper Connections</b>		Unit Tag: AHU-5 Stacked		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 www.DaikinApplied.com Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH011GDGM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	


All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

BOBKVU

UAMS CAMID

20

11/1/2024

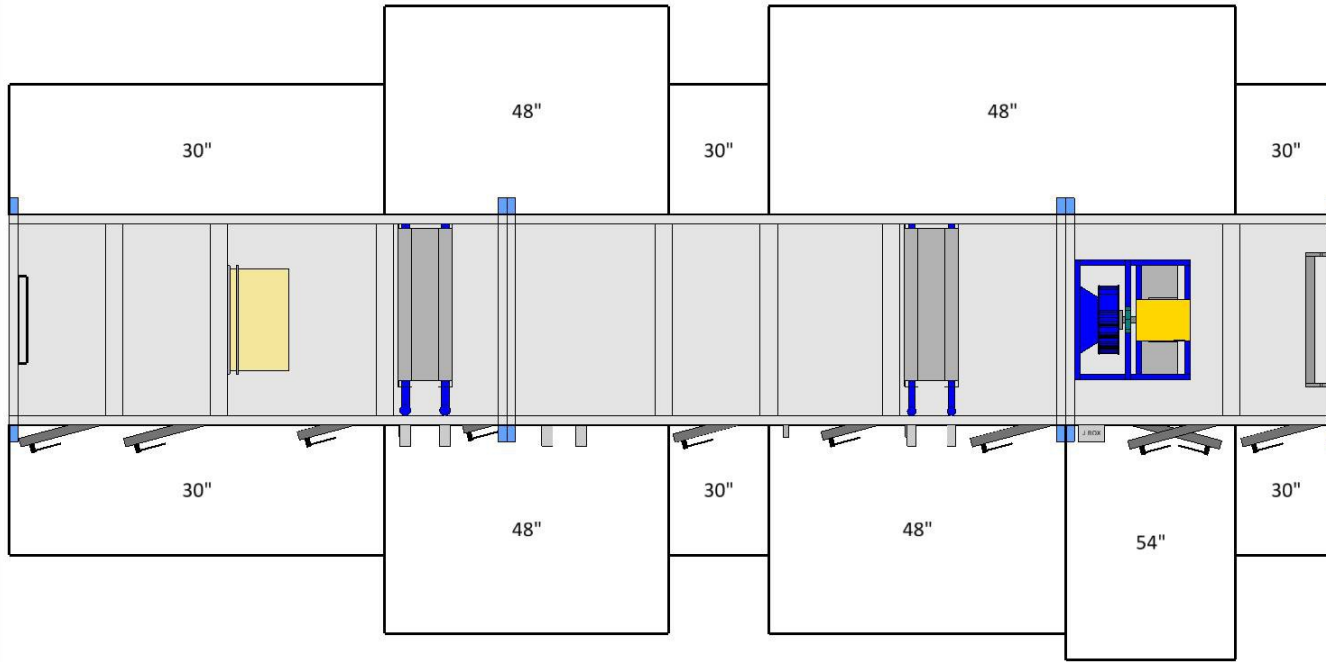

Notes


Check local electrical component service clearance codes for specific distances.

Access is only required on one side of the unit.

AHU-5 Stacked

Drawing

PLAN VIEW

<b>Service Clearance View</b>	Unit Tag: AHU-5 Stacked	Sales Office: Harrison Energy Partners		 13600 Industrial Park Blvd, Minneapolis, MN 55441 <a href="http://www.DaikinApplied.com">www.DaikinApplied.com</a> Software Version: 13.43		
Product: Vision Air Handler	Project Name: UAMS CAMID	Sales Engineer:				
Model: CAH011GDGM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1			Scale: NTS


All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

BOBKVU


UAMS CAMID

21

11/1/2024

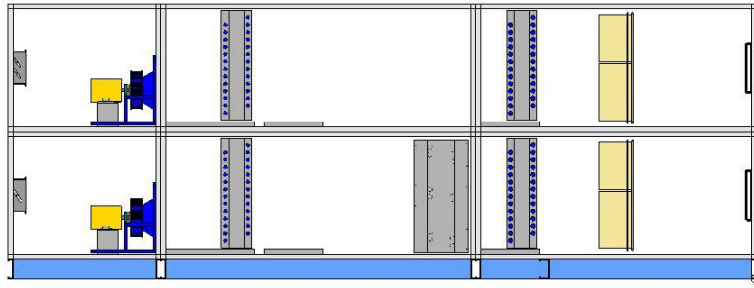

LEFT ELEVATION VIEW

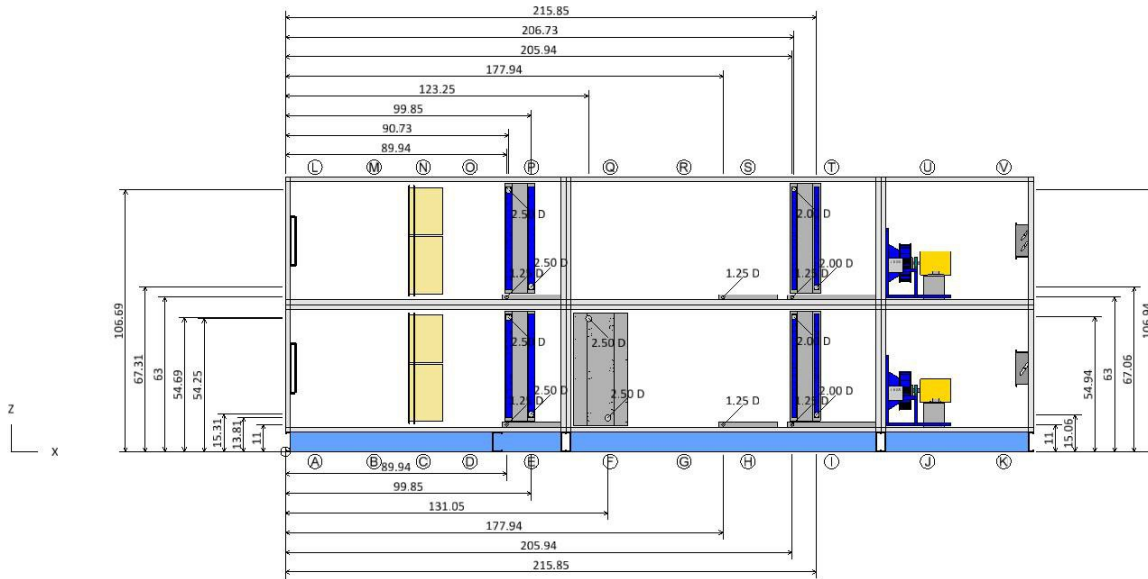

RIGHT ELEVATION VIEW

Coil and Drain Connections

Type	X	Y	Z	Diam
Chilled Water coil				
Condensate drain conn:	89.94	-2.90	11.00	1.25
Cold water inlet:	99.85	-5.00	15.31	2.50
Cold water outlet:	90.73	-5.00	54.69	2.50
Steam Face and Bypass Coil				
Steam inlet:	123.25	-5.00	54.25	2.50
Steam outlet:	131.05	-5.00	13.81	2.50
Chilled Water coil				
Condensate drain conn:	177.94	-2.90	11.00	1.25
Chilled Water coil				
Condensate drain conn:	205.94	-2.90	11.00	1.25
Cold water inlet:	215.85	-5.00	15.06	2.00
Cold water outlet:	206.73	-5.00	54.94	2.00
Chilled Water coil				
Condensate drain conn:	89.94	-2.90	63.00	1.25
Cold water inlet:	99.85	-5.00	67.31	2.50
Cold water outlet:	90.73	-5.00	106.69	2.50
Chilled Water coil				
Condensate drain conn:	177.94	-2.90	63.00	1.25
Chilled Water coil				
Condensate drain conn:	205.94	-2.90	63.00	1.25
Cold water inlet:	215.85	-5.00	67.06	2.00
Cold water outlet:	206.73	-5.00	106.94	2.00

Note: Dimensions are measured from the origin point.

AHU-5 Stacked

Drawing

**Coil and Drain Connections**

Product: Vision Air Handler

Model: CAH011GDGM

Unit Tag: AHU-5 Stacked

Project Name: UAMS CAMID

Nov. 1, 2024

Ver/Rev:

Sheet: 1 of 1

Sales Office: Harrison Energy Partners

Sales Engineer:

Scale: NTS

Tolerance: +/-0.25"

Dwg Units: in



13600 Industrial Park Blvd, Minneapolis, MN 55441  
www.DaikinApplied.com Software Version: 13.43


All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

B0BKVVU


UAMS CAMID

22

11/1/2024

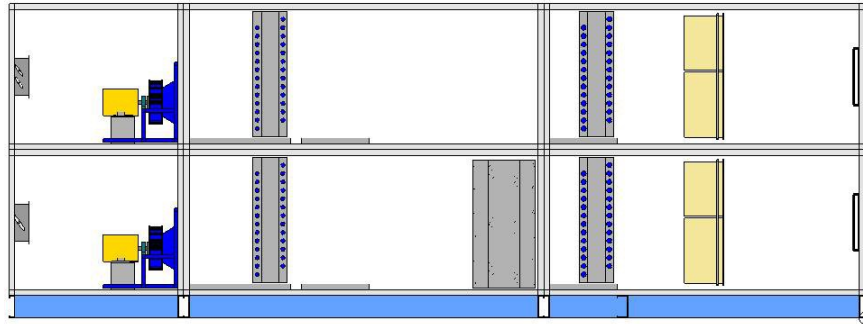

LEFT ELEVATION VIEW

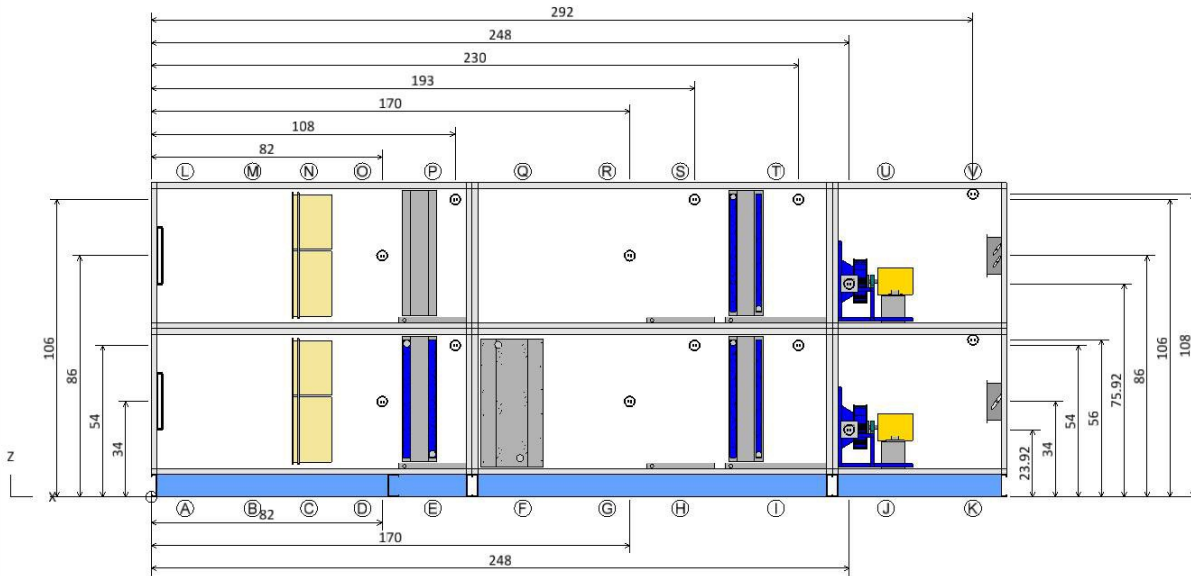


RIGHT ELEVATION VIEW

Component Key

	Type	X	Y	Z	Volts	Phase
Ⓓ	Access Section LED Marine Light	82.00	0.00	34.00	110	1
Ⓔ	Chilled Water coil LED Marine Light	108.00	0.00	54.00	110	1
Ⓖ	Access Section LED Marine Light GFI	170.00	0.00	34.00	110	1
Ⓕ	Chilled Water coil LED Marine Light	193.00	0.00	54.00	110	1
Ⓘ	Chilled Water coil LED Marine Light	230.00	0.00	54.00	110	1
Ⓙ	Return Fan Fan	248.00	0.00	23.92	460	3
Ⓚ	Plenum Section LED Marine Light	292.00	0.00	56.00	110	1
Ⓞ	Access Section LED Marine Light	82.00	0.00	86.00	110	1
Ⓟ	Chilled Water coil LED Marine Light	108.00	0.00	106.00	110	1
Ⓡ	Access Section LED Marine Light GFI	170.00	0.00	86.00	110	1
Ⓢ	Chilled Water coil LED Marine Light	193.00	0.00	106.00	110	1
Ⓣ	Chilled Water coil LED Marine Light	230.00	0.00	106.00	110	1
Ⓤ	Supply Fan Fan	248.00	0.00	75.92	460	3
Ⓥ	Plenum Section LED Marine Light	292.00	0.00	108.00	110	1

Note: Dimensions are measured from the origin point.

<b>Electrical Connections</b>		Unit Tag: AHU-5 Stacked		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 www.DaikinApplied.com Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH011GDGM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	

All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

AHU-5 Stacked

Drawing




BOBKVU

UAMS CAMID

23

11/1/2024

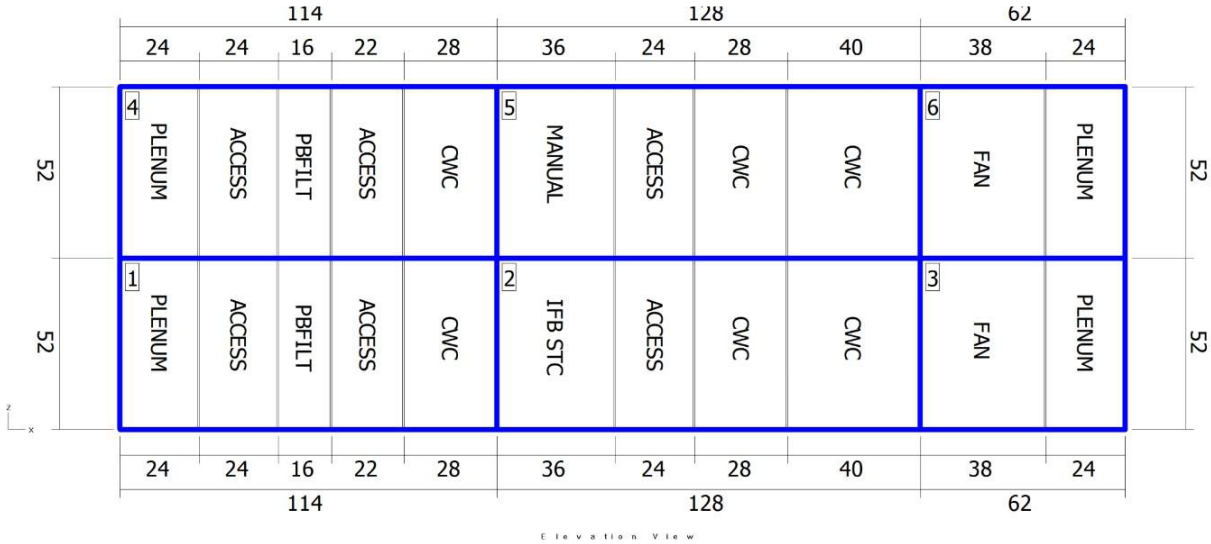


Shipping Sections				
Section	Weight (lb)	X	Y	Z
Section 1	1440.72	114	48	52
Section 2	1843.39	128	48	52
Section 3	771.04	62	48	52
Section 4	1249.06	114	48	52
Section 5	1255.39	128	48	52
Section 6	677.00	62	48	52
<b>Total Unit</b>	<b>7236.60</b>	<b>304</b>	<b>48</b>	<b>104</b>

Note: Base rails, curb ready base, coil connectors, drain connectors, and control boxes not included in height X, Y, Z dimensions. Shipping section may be 2" longer in air flow direction due to internal splice joint.

AHU-5 Stacked

Drawing

<b>Shipping Sections</b>		Unit Tag: AHU-5 Stacked		Sales Office: Harrison Energy Partners			 13600 Industrial Park Blvd, Minneapolis, MN 55441 <a href="http://www.DaikinApplied.com">www.DaikinApplied.com</a> Software Version: 13.43
Product: Vision Air Handler		Project Name: UAMS CAMID		Sales Engineer:			
Model: CAH011GDGM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	


All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.

BOBKVU

UAMS CAMID


24

11/1/2024

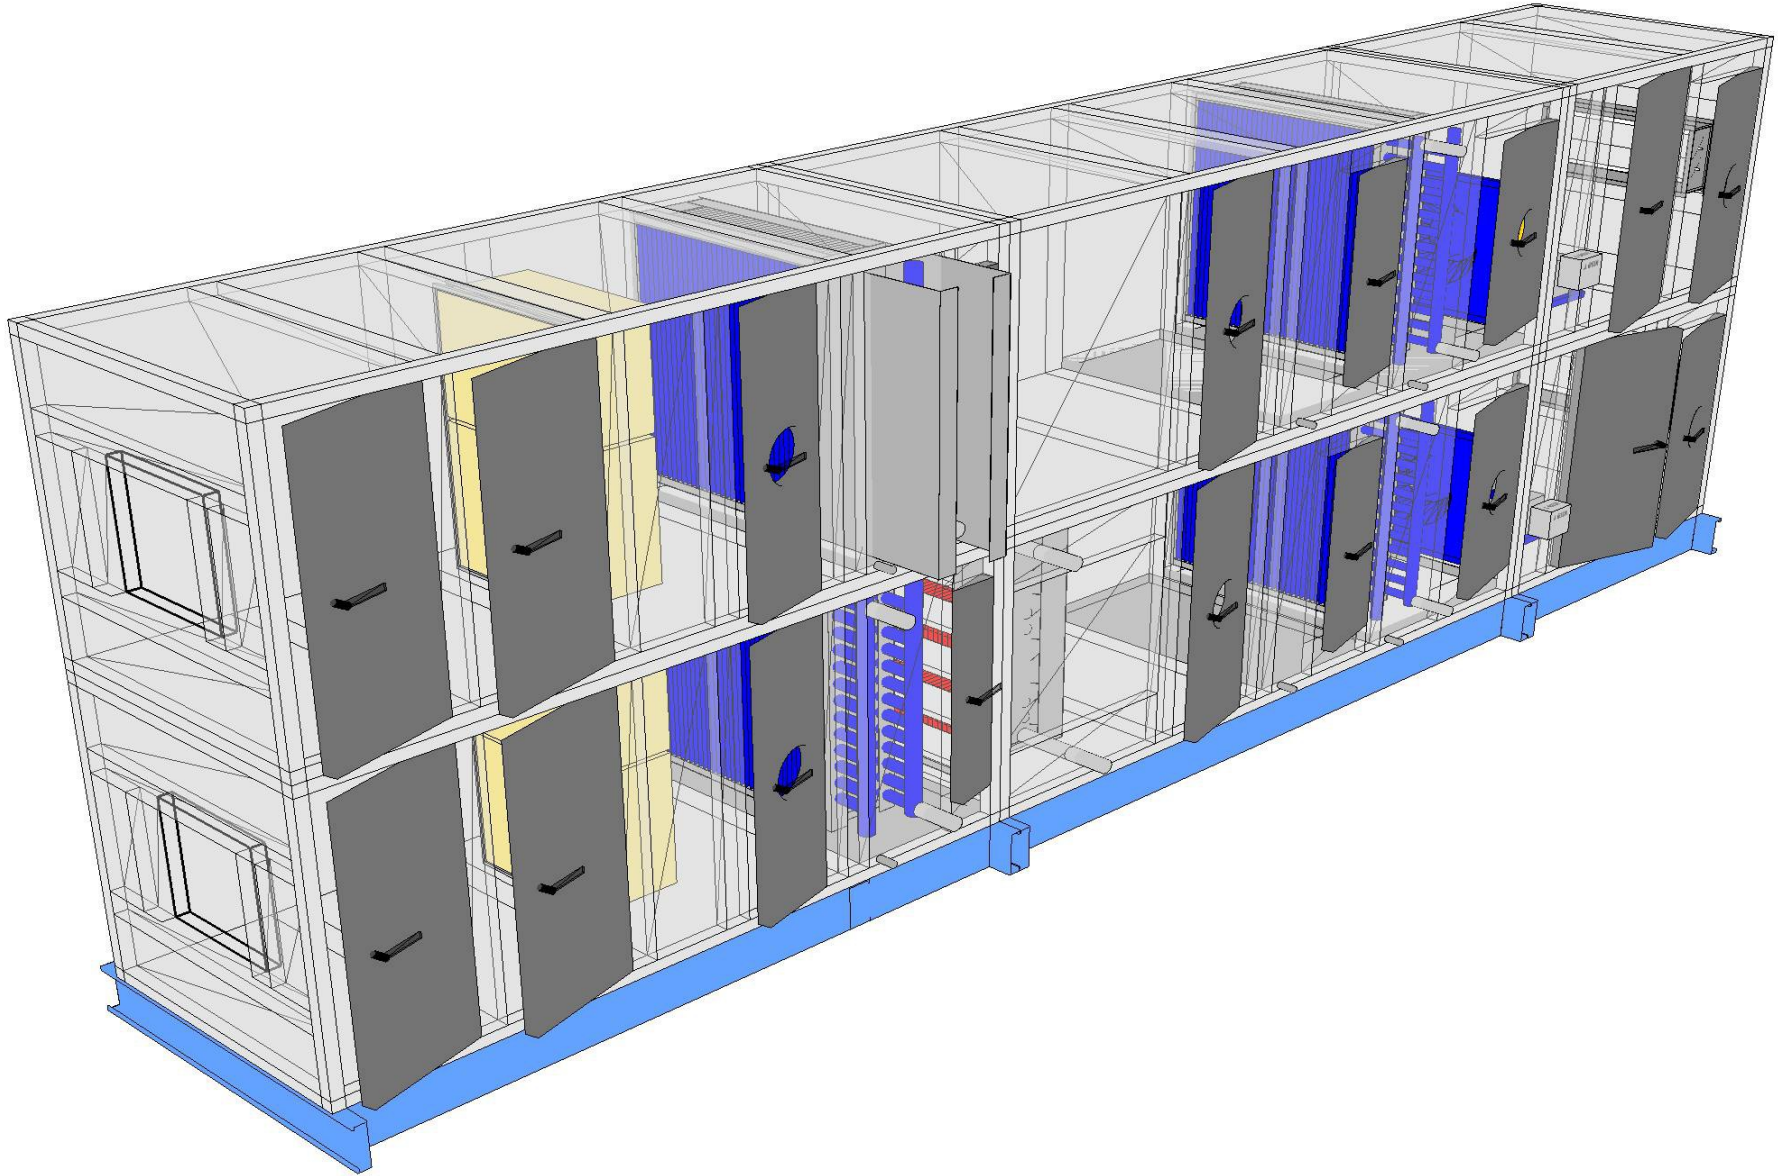


AHU-5 Stacked


Drawing

<b>Product Drawing</b>	Unit Tag: AHU-5 Stacked		Sales Office: Harrison Energy Partners				 13600 Industrial Park Blvd, Minneapolis, MN 55441 <a href="http://www.DaikinApplied.com">www.DaikinApplied.com</a> Software Version: 13.43
Product: Vision Air Handler	Project Name: UAMS CAMID		Sales Engineer:				
Model: CAH011GDGM	Nov. 1, 2024	Ver/Rev:	Sheet: 1 of 1	Scale: NTS	Tolerance: +/-0.25"	Dwg Units: in	
All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.							

Unit drawings showing humidifier manifolds and IFB coil in the top airstream

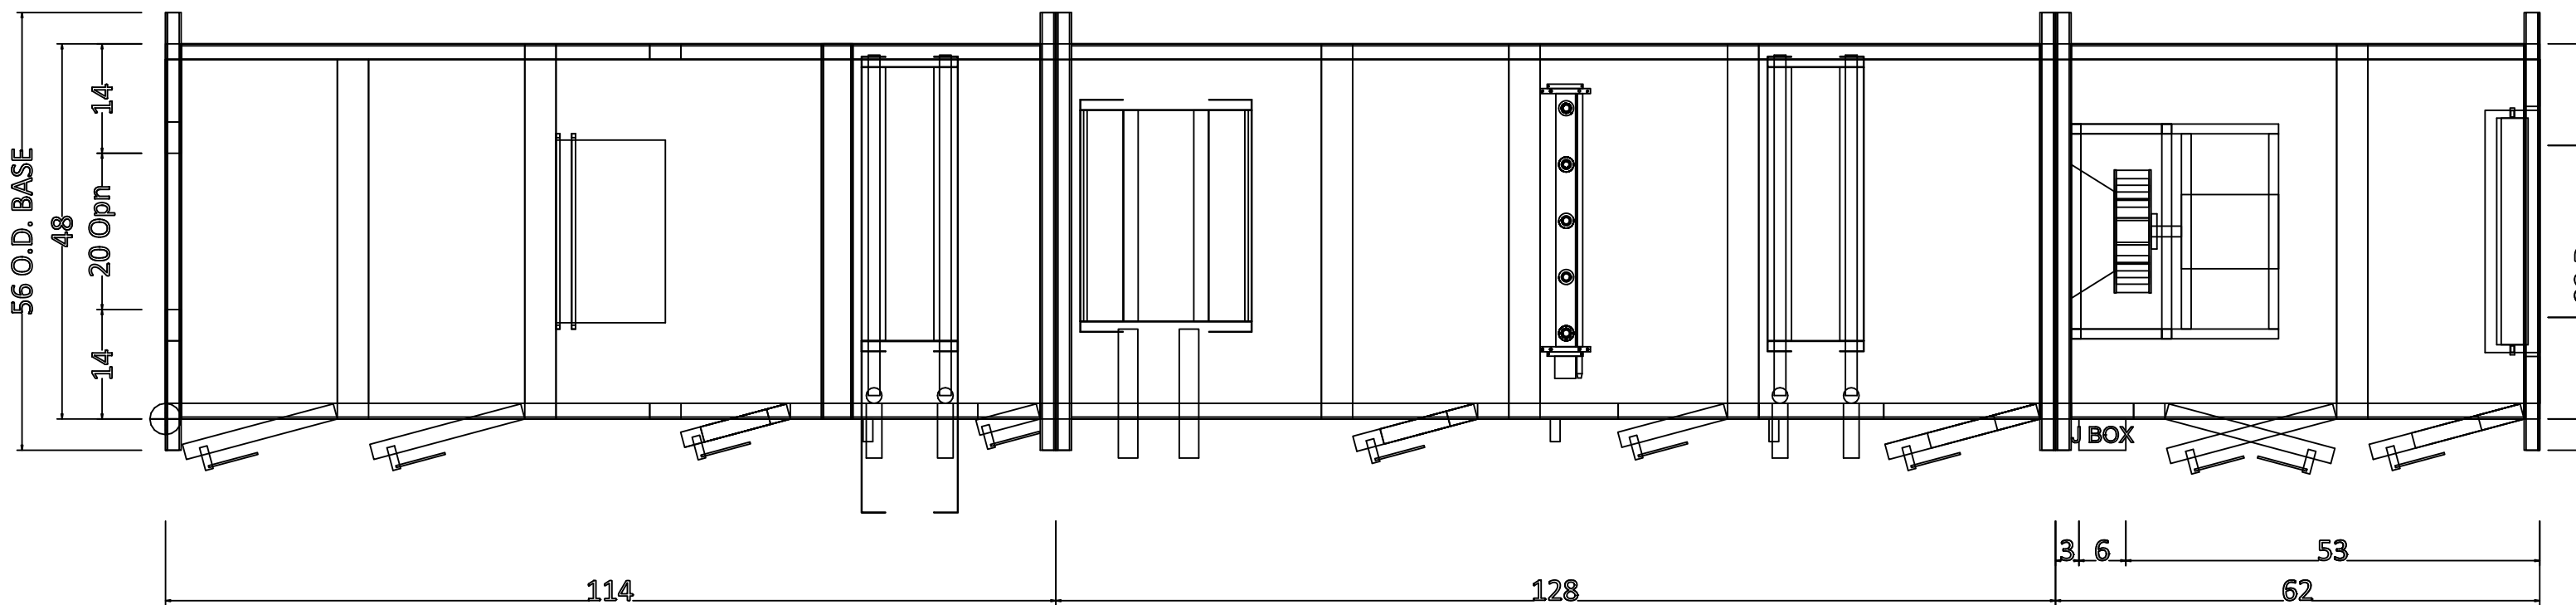

PLAN VIEW

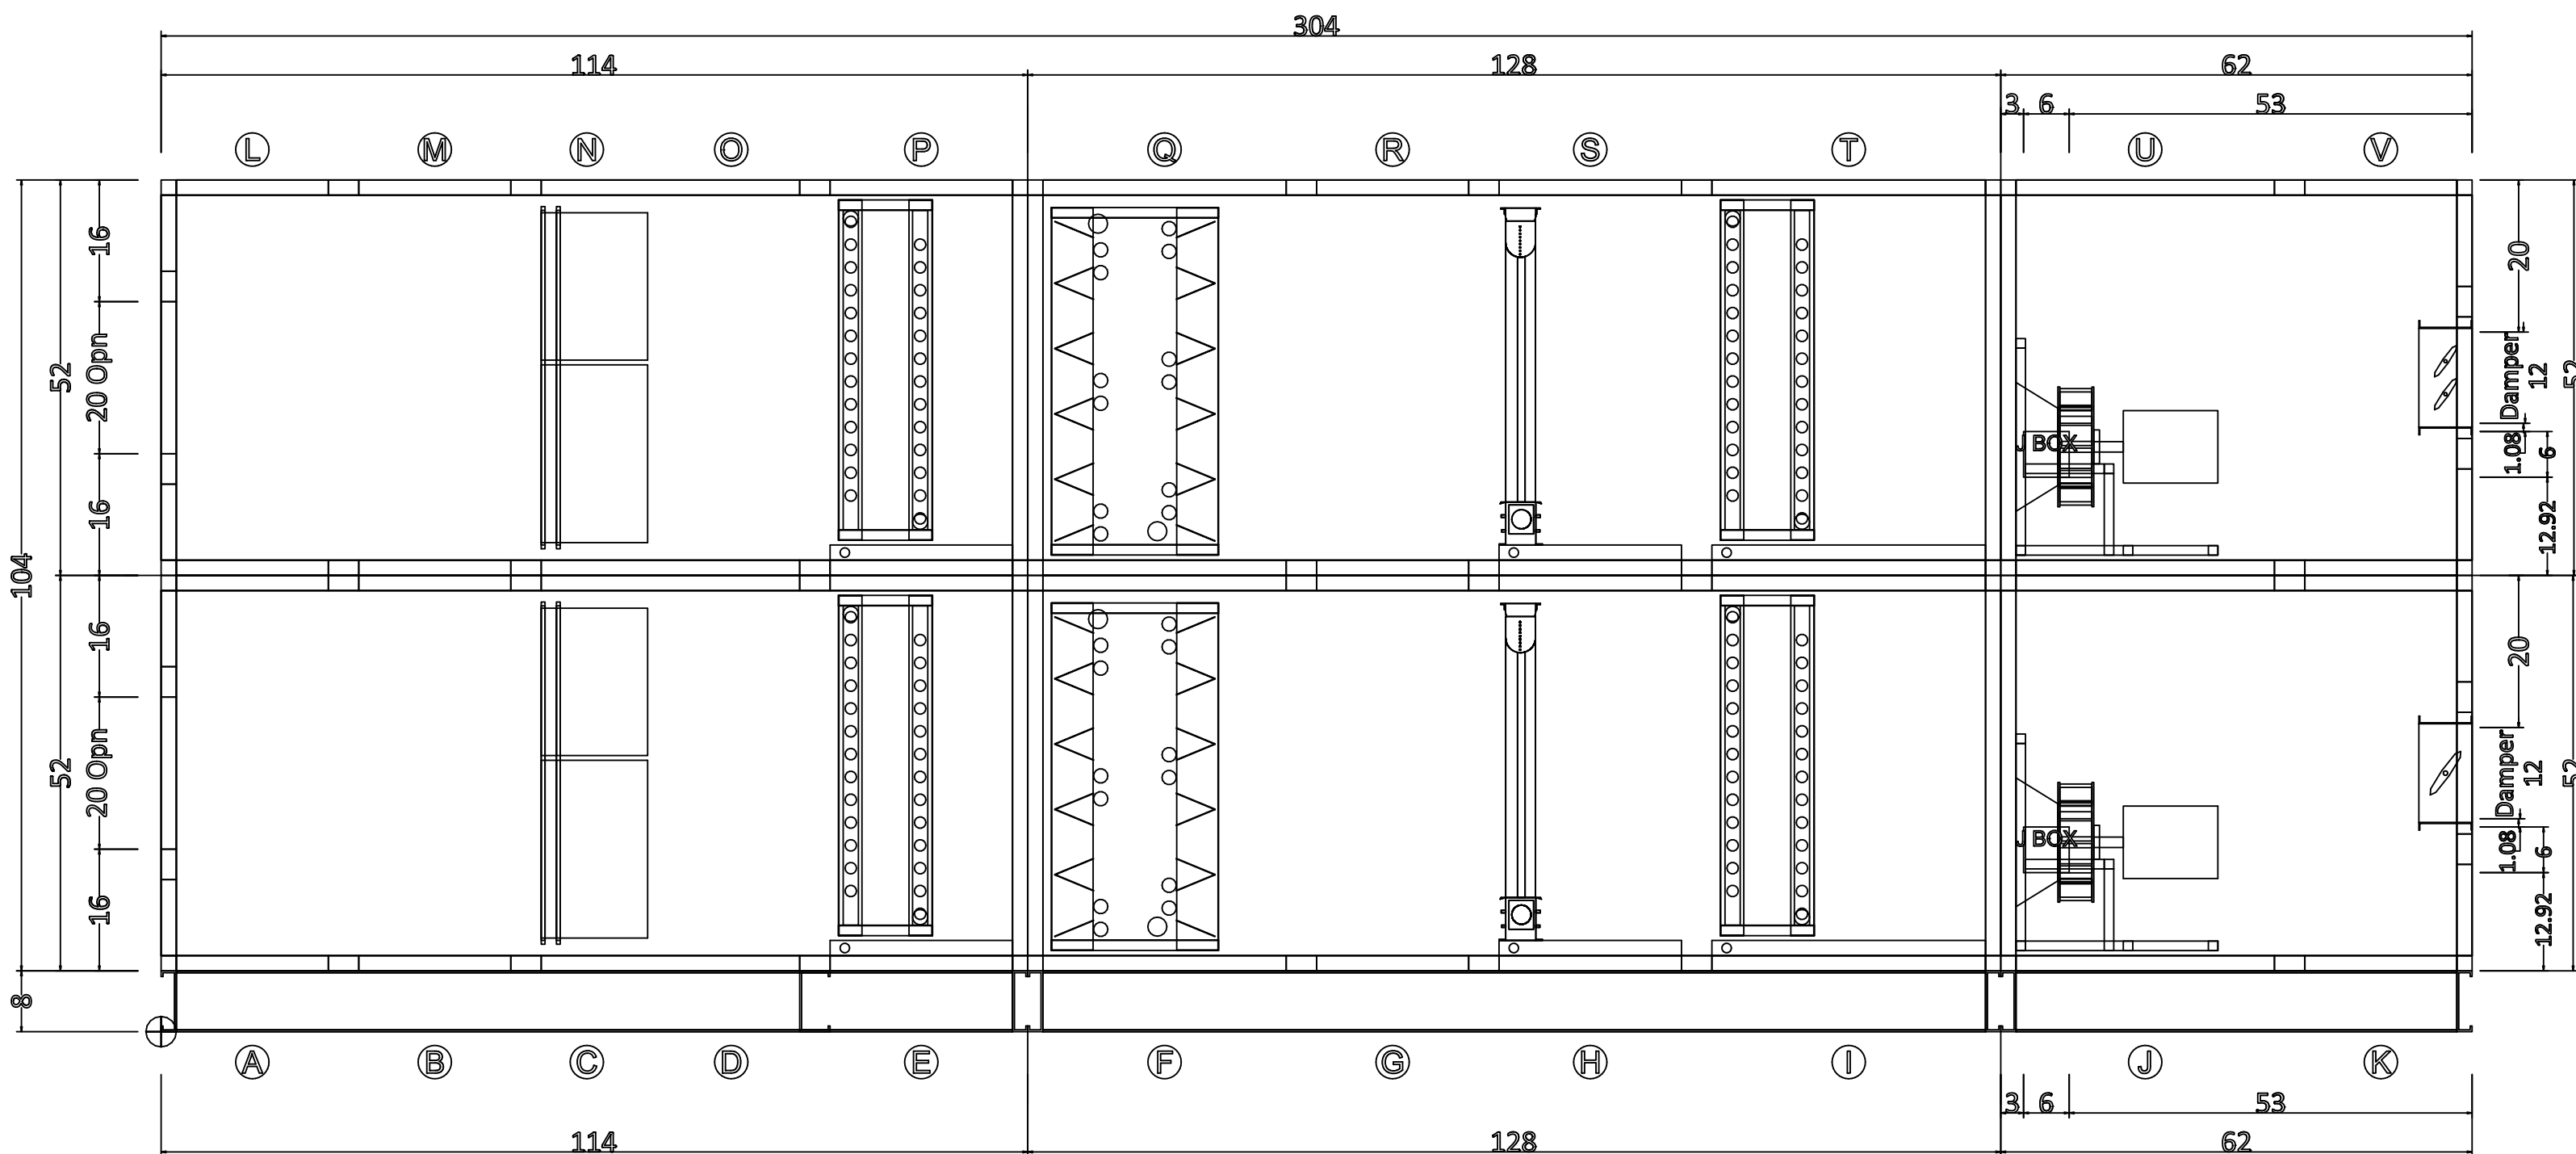

ELEVATION VIEW

Component Key	
(A)	Plenum Section Right Door (WxH): 20 ins x 48 ins
(B)	Access Section Right Door (WxH): 20 ins x 48 ins
(C)	Panel and Cartridge Filter Pre Filter Type: Pleated (MERV 8) Cartridge Filter Type: Varicel VXL
(D)	Access Section Right Door (WxH): 14 ins x 48 ins
(E)	Chilled Water coil Coil Model: 5WH1108C Total Capacity: 54005.0 Btu/hr Right Door (WxH): 8 ins x 38 ins
(F)	Steam Face and Bypass Coil Total Capacity: 240300.0 Btu/hr
(G)	Access Section Right Door (WxH): 16 ins x 48 ins
(H)	Chilled Water coil Coil Model: 5WH0002C Total Capacity: 0.0 Btu/hr Right Door (WxH): 14 ins x 38 ins
(I)	Chilled Water coil Coil Model: 5WH1008C Total Capacity: 326506.0 Btu/hr Right Door (WxH): 20 ins x 38 ins
(J)	Return Fan Fan Type: Centrifugal - Plenum Fan Size (Class): 16 (2) Air Flowrate: 3870.0 cfm T.S.P: 7.3 insWg Motor Power: 10.0 HP Right Door (WxH): 22 ins x 48 ins
(K)	Plenum Section Right Door (WxH): 20 ins x 44 ins
(L)	Plenum Section Right Door (WxH): 20 ins x 48 ins
(M)	Access Section Right Door (WxH): 20 ins x 48 ins
(N)	Panel and Cartridge Filter Pre Filter Type: Pleated (MERV 8) Cartridge Filter Type: Varicel VXL
(O)	Access Section Right Door (WxH): 14 ins x 48 ins
(P)	Chilled Water coil Coil Model: 5WH1108C Total Capacity: 54005.0 Btu/hr Right Door (WxH): 8 ins x 38 ins
(Q)	Manual Section
(R)	Access Section Right Door (WxH): 16 ins x 48 ins
(S)	Chilled Water coil Coil Model: 5WH0002C Total Capacity: 0.0 Btu/hr Right Door (WxH): 14 ins x 38 ins
(T)	Chilled Water coil Coil Model: 5WH1008C Total Capacity: 326506.0 Btu/hr Right Door (WxH): 20 ins x 38 ins
(U)	Supply Fan Fan Type: Centrifugal - Plenum Fan Size (Class): 16 (2) Air Flowrate: 3870.0 cfm T.S.P: 7.2 insWg Motor Power: 10.0 HP Right Door (WxH): 22 ins x 48 ins
(V)	Plenum Section Right Door (WxH): 20 ins x 44 ins

Plan/Elevation - No Ends

Unit Tag: AHU-5 Stacked

Sales Office: Daikin Applied Plymouth

Product: Vision Air Handler

Project Name: UAMS CAMID

Sales Engineer:

Model: CAH011GDGM

Oct. 24, 2024

Ver/Rev: A

Sheet: 1 of 1

Scale: NTS

Tolerance: +/-0.25"

Dwg Units: in



13600 Industrial Park Blvd, Minneapolis, MN 55441  
www.DaikinApplied.com Software Version: 13.43

All opening dimensions have a 1" mounting flange along the inner edge. The actual airflow area of the opening is 2" smaller in each dimension.



# Submittal Package



Opportunity Name, Quote Name  
UAMS CAMID, 896314

Preparation Date  
2024-07-23

Locally Represented By  
Condair House Account Sales  
2740 Fenton Road  
Ottawa, Ontario, Canada

Salesperson  
Liam Berry

## Zone List

Zone Tag	Q <sub>MA</sub> CFM	Q <sub>OA</sub> %	DB <sub>OA</sub> °F	RH <sub>OA</sub> %	DB <sub>BH</sub> °F	RH <sub>BH</sub> %	DB <sub>AH</sub> °F	RH <sub>AH</sub> %	DB <sub>SD</sub> °F	RH <sub>SD</sub> %	W <sub>Duct</sub> in.	H <sub>Duct</sub> in.	H <sub>TOT</sub> lbs/hr	Absorption ft	Location	Tech
H-2	26000	100	53	13	53	13	53	83	53	80	108	72	718	1.62	In Duct	LiveSteam
H-5	2500	100	52	13	55	11	55	85	55	80	30	36	77	1.97	In Duct	LiveSteam

Q<sub>MA</sub> = Mixed Air Volume

DB<sub>OA</sub> = Outside Air Design Dry Bulb Temperature

DB<sub>BH</sub> = Before Humidification Dry Bulb Temperature

DB<sub>AH</sub> = After Humidification Dry Bulb Temperature

DB<sub>SD</sub> = Space Design Dry Bulb Temperature

W<sub>Duct</sub> = Duct Width

H<sub>TOT</sub> = Total Humidification

Q<sub>OA</sub> = Outside Air

RH<sub>OA</sub> = Outside Air Design Relative Humidity

RH<sub>BH</sub> = Before Humidification Relative Humidity

RH<sub>AH</sub> = After Humidification Relative Humidity

RH<sub>SD</sub> = Space Design Relative Humidity

H<sub>Duct</sub> = Duct Height

Absorption = Absorption Distance

## Product List

Zone Tag	Part Number	Item	Qty
H-2	1594341	Valve, Bronze, 1 1/4" Cv=20.0	1
H-2	2597632	Act. 0-10 Vdc 1/2 - 2 in (1/2 - 3/4 SS)	1
H-2	2597652	Wye Strainer, 2.0" nominal diameter	1
H-2	2577157	Trap F&T up to 15 psig, M	1
H-2	2549922	HEADER SAM-E 108, 3" CENTERS (SST)	1
H-2	2538925	Header Insulation, SAM-e 108"	1
H-2	1503419	Steam Tube, SAM-e, 60 in Type B, 304SS	33
H-2	2538853	Tube Insulation, SAM-e 60" (Covers 1 Tube)	33
H-2	2521405	Mounting Frame, SAM-e 51 - 99 in, SS	1
H-2	1503476	Inlet adapter, SAM-e, Pressure Steam 1-1/4" npt	1
H-2	2591657	SP Top Center Mounting Assembly	3
H-2	2591658	SP SAM-e Adjustable yoke, Side Frame qty2	1
H-2	2577157	Trap F&T up to 15 psig, M	1
H-5	1594314	Valve, Bronze, 1/2" Cv=2.20	1
H-5	2597632	Act. 0-10 Vdc 1/2 - 2 in (1/2 - 3/4 SS)	1
H-5	2597648	Wye Strainer, 0.75" nominal diameter	1
H-5	2577157	Trap F&T up to 15 psig, M	1
H-5	2549909	HEADER SAM-E 30, 3" CENTERS (SST)	1
H-5	2538912	Header Insulation, SAM-e 30"	1
H-5	1503391	Steam Tube, SAM-e, 24 in Type A, 304SS	7
H-5	2538847	Tube Insulation, SAM-e 24" (Covers 1 Tube)	7
H-5	2521404	Mounting Frame, SAM-e 27 - 51 in, SS	1
H-5	1503473	Inlet adapter, SAM-e, Pressure Steam 1/2" npt	1
H-5	2591657	SP Top Center Mounting Assembly	1
H-5	2591658	SP SAM-e Adjustable yoke, Side Frame qty2	1
H-5	2577157	Trap F&T up to 15 psig, M	1

## Data Sheet - H-2



LiveSteam



Opportunity Name: UAMS CAMID

Quote Name: 896314

Salesperson: Liam Berry

Date: 2024-07-23

### Calculation Basis

Humidification Load (total)	718.0 lbs/h	Outside Air	Temperature	53.0°F
Load Correction (gains/losses)	30.7 lbs/h		Relative Humidity	13 %
Calculated Load	687.3 lbs/h		Absolute Humidity	7.4 gr/lb
Duct Size	108 x 72 in.	Before Humidification	Temperature	53.0°F
Duct Orientation	Horizontal		Relative Humidity	13 %
Total Air Volume	26000 CFM		Absolute Humidity	7.4 gr/lb
Outside Air	100 %	After Humidification	Temperature	53.0°F
Air Velocity	481.5 ft./min		Relative Humidity	83 %
Altitude	0 ft		Absolute Humidity	49.5 gr/lb
Air Pressure	14.7 psig	Space Design	Temperature	53.0°F
Humidity Increase	40.3 gr/lb		Relative Humidity	80 %
			Absolute Humidity	47.7 gr/lb


### Product Data

#### Valve, Bronze, 1 1/4" Cv=20.0


Supplied Steam Pressure:	12 psig	Maximum Steam Pressure:	50 psig
Adjusted Maximum Capacity:	719.3 lbs/h	Width:	17.3 in.
Steam Outlet OD:	1.25 in.	Height:	23.7 in.
Quantity Steam Outlets:	1	Depth:	9 in.
Minimum Steam Pressure:	2 psig	Valve CV:	20

#### HEADER SAM-E 108, 3" CENTERS (SST)

Width:	9 in.	Net Weight:	43.4 lbs
Height:	8.75 in.	Product Length:	108 in.
Length:	106.25 in.		

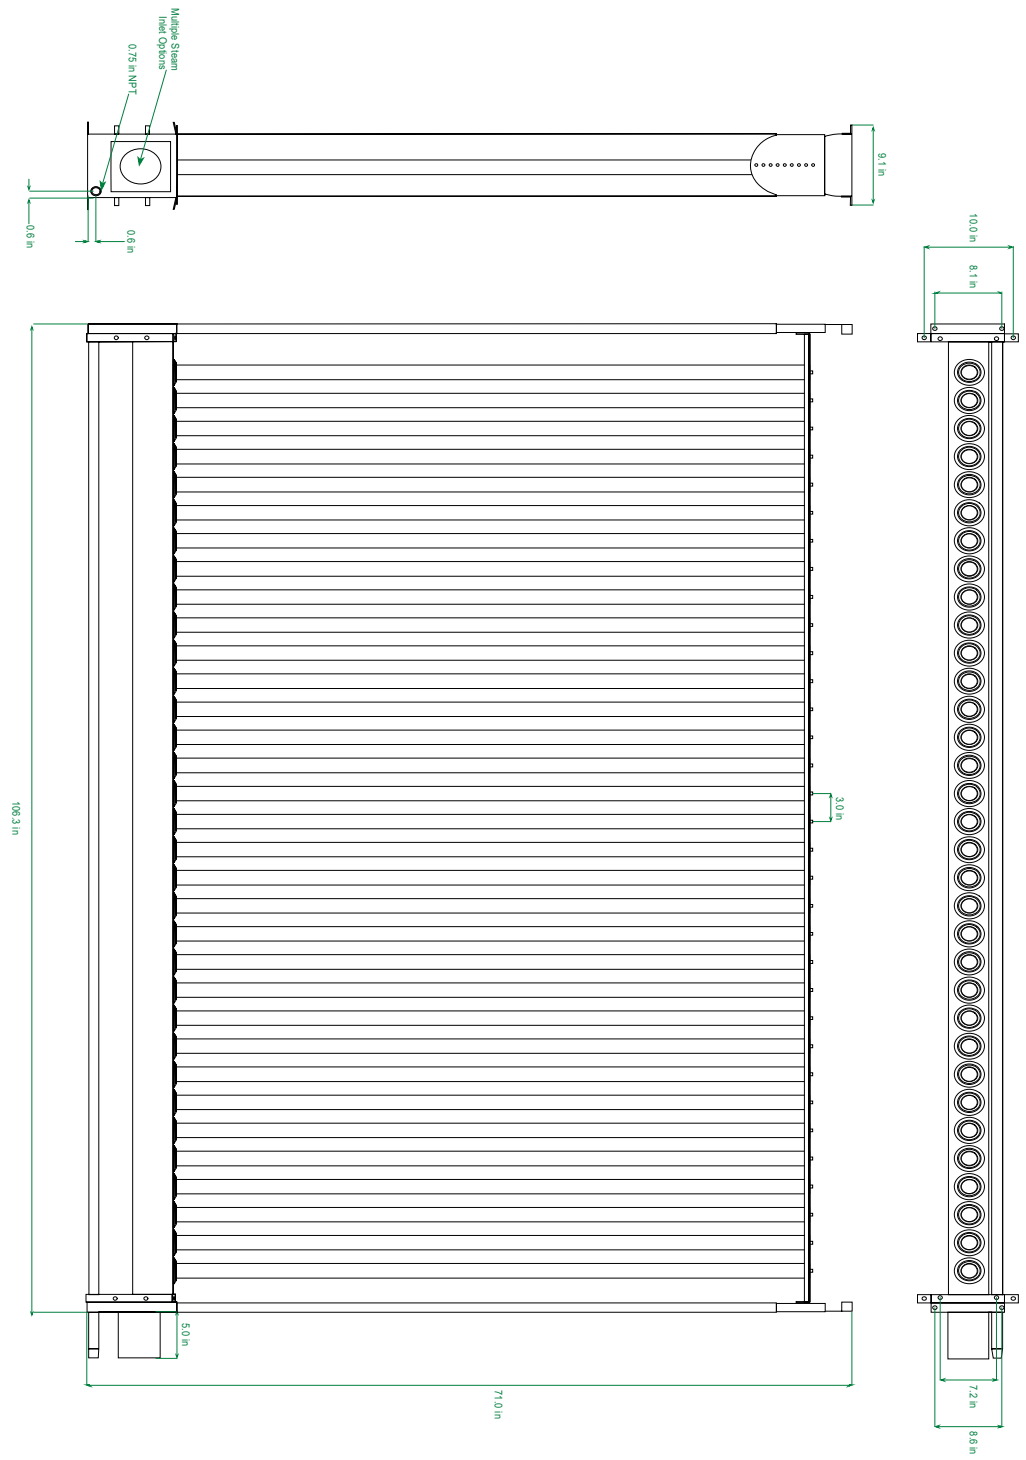



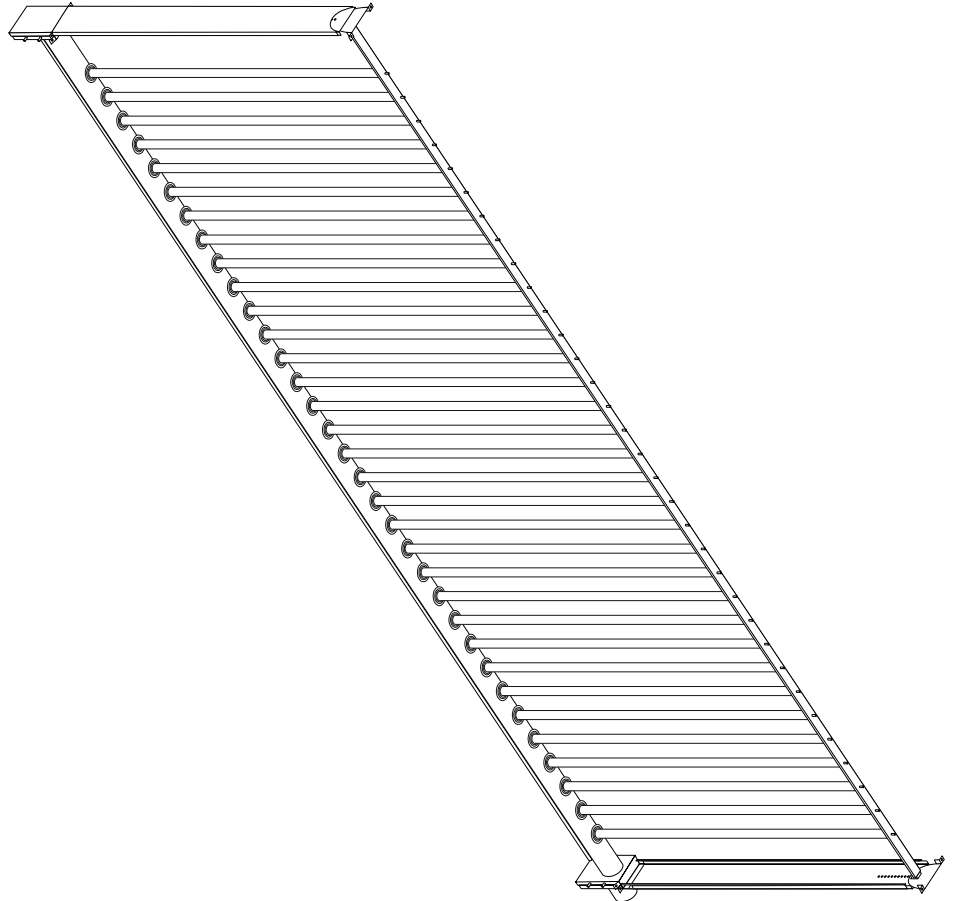

## Data Sheet - H-5



LiveSteam



Opportunity Name: UAMS CAMID

Quote Name: 896314

Salesperson: Liam Berry

Date: 2024-07-23

### Calculation Basis

Humidification Load (total)	77.1 lbs/h	Outside Air	Temperature	51.5°F
Load Correction (gains/losses)	5.0 lbs/h		Relative Humidity	13 %
Calculated Load	72.1 lbs/h		Absolute Humidity	7.0 gr/lb
Duct Size	30 x 36 in.	Before Humidification	Temperature	55.0°F
Duct Orientation	Horizontal		Relative Humidity	11 %
Total Air Volume	2500 CFM		Absolute Humidity	7.0 gr/lb
Outside Air	100 %	After Humidification	Temperature	55.0°F
Air Velocity	333.3 ft./min		Relative Humidity	85 %
Altitude	0 ft		Absolute Humidity	54.3 gr/lb
Air Pressure	14.7 psig	Space Design	Temperature	55.0°F
Humidity Increase	44.2 gr/lb		Relative Humidity	80 %
			Absolute Humidity	51.2 gr/lb


### Product Data


#### Valve, Bronze, 1/2" Cv=2.20

Supplied Steam Pressure:	12 psig	Maximum Steam Pressure:	50 psig
Adjusted Maximum Capacity:	79.1 lbs/h	Width:	9.7 in.
Steam Outlet OD:	0.5 in.	Height:	11.2 in.
Quantity Steam Outlets:	1	Depth:	6 in.
Minimum Steam Pressure:	2 psig	Valve CV:	2.2

#### HEADER SAM-E 30, 3" CENTERS (SST)

Width:	9 in.	Net Weight:	15.4 lbs
Height:	8.75 in.	Product Length:	30 in.
Length:	28.25 in.		

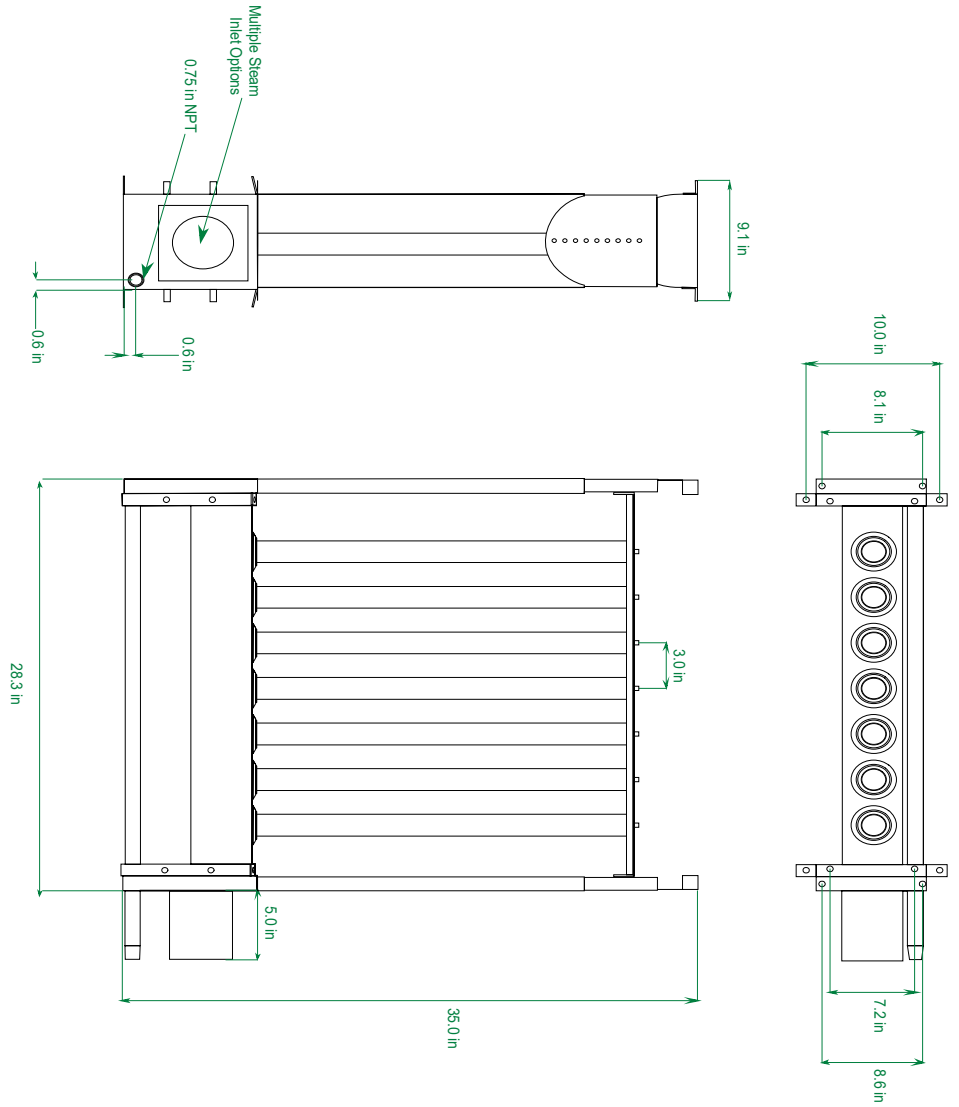

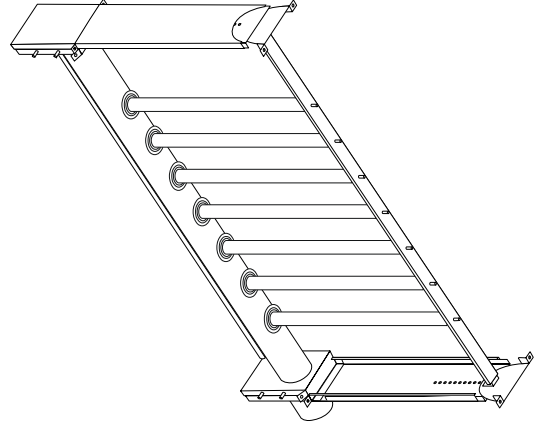

## **A1 - Live Steam (1594341) Description**

### **LIVESTEAM HUMIDIFIERS**

**Pressurized Boiler Steam Humidifier (Isothermal Technology)**

Pre-engineered, cost effective, humidification system designed to control and distribute steam under pressure, from a facility steam boiler, for introduction into a duct or Air Handling Unit.

The system is configured to operate with regular boiler steam, up to 50 psig, using standard bronze and stainless steel components.

Steam distributors are constructed of high quality stainless steel and can be configured for single or multiple configurations. The optional stainless steel insulation jacket encompasses 1/2" fiberglass insulation to minimize heat transfer in the air stream

All LIVESTEAM systems consist of: a steam valve, separator, actuator/linkage and steam distributor(s). Required optional components: steam trap(s), wye strainers, humidistat(s) and temperature switch.


## FEATURES

- Stainless steel separators
- Bronze steam valves with stainless steel seat, stem, and plug
- Pneumatic or electric actuator/linkage
- Stainless steel steam distributors (standard or insulated)
- Single distributor capacity: up to 1501 lbs/hr @ 50 psi
- Multiple distributor capacity: up to 3209 lbs/hr @ 50 psi
- On/Off or modulating control
- Two-year limited warranty

## A2 - Live Steam (1594341) Schematic

### VALVE DATA

<b>Valve Manufacturer:</b>	Schneider Electric
<b>Valve Model:</b>	VB-7263
<b>Valve Size:</b>	1/2" - 2"
<b>Flow Type:</b>	Modified Equal Percentage
<b>Flow Coefficient (Cv) Factor:</b>	As Specified




Valve Body Data		Material	
Maximum Static Pressure	250 Psig	Body	Bronze
Maximum Inlet Pressure (Steam)	100 Psig	Stem	Stainless Steel
Recommended Differential Pressure	35 Psig	Seat	Bronze
		Plug	Stainless Steel
Maximum Media Temperature	340°F(171°C)	Packing	Spring Loaded Teflon Cone
Plug Type	Parabolic	Disc	Teflon

Rangeability:

Rangeability is defined as the ratio of rated flow to the minimum controllable flow.

For two-way valves, modulation occurs when plug displacement allows flow through the area between the plug and the port. The rangeability value is achieved by accurately machining the plug and port diameters for appropriate clearance. The following are normal values, with 25% tolerances.

Nominal Size		Valve Cv	Nominal Ratio
Standard	Metric		
1/2"	15mm	0.1	2:1
		0.22	4:1
		0.4	5:1
		0.75	10:1
		1.3	15:1
		2.2	25:1
		2.8	28:1
3/4"	20mm	4.4	40:1
		5.5	50:1
		7.5	60:1
1"	25mm	10	60:1
		12	75:1
1 1/4"	32mm	20	75:1
1 1/2"	40mm	28	75:1
2"	50mm	40	75:1

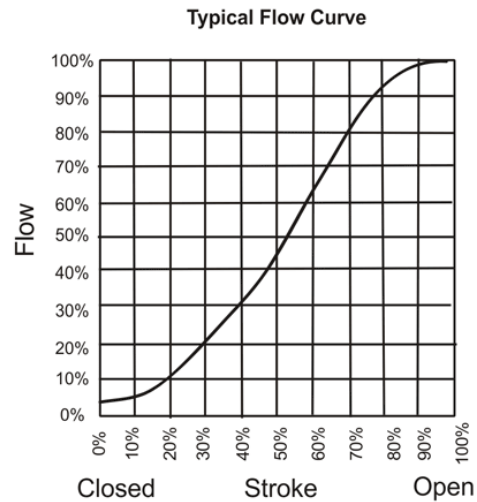

\*For representative purposes only

NORTEC reserves the right to ship the selected valve or an equivalent valve depending on availability



CONTROL VALVE  
BRONZE BODY

### **A3 - Live Steam (2597632) Description**

**LIVESTEAM / SE Series Electric Modulating Actuator**, provides motive power to operate steam valves. The actuators are designed mount directly to the valves without the use of linkages. They are linear acting and feature a return spring to close the valve in case of a loss of power. A manual override simplifies commissioning and allows the user to set the correct pre-load tension on the valve stem. The actuators are designed for safe operation and feature overload protection as well as a plenum rated polymer housing. Available control voltages include on/off, 0-10VDC, or 4- 20 mA, and 2 to 10 VDC feedback signal reports position of the valve. All actuators a operate with a 24 VAC supply voltage. For applications where only 120 VAC is available, a plug-in transformer, part 1603032, can be used.

## A4 - Live Steam (2597632) Installation

### Actuator/Valve Close-Off Pressure

Valve Material	Valve Part Number	CV	Size	Pressure* (psig)	Actuator Part Number			Linkage Kit**
					0-10 Vdc	4-20 mA dc	On/Off	
Bronze	1594300	0.10	0.5"	2-50	1507549	1507550	1507551	2573331
	1594302	0.22	0.5"	2-50	1507549	1507550	1507551	2573331
	1594304	0.40	0.5"	2-50	1507549	1507550	1507551	2573331
	1594306	0.75	0.5"	2-50	1507549	1507550	1507551	2573331
	1594310	1.3	0.5"	2-50	1507549	1507550	1507551	2573331
	1594314	2.2	0.5"	2-50	1507549	1507550	1507551	2573331
	1594316	2.9	0.5"	2-50	1507549	1507550	1507551	2573331
	1594318	4.4	0.5"	2-50	1507549	1507550	1507551	2573331
	1594322	5.5	0.75"	2-50	1507549	1507550	1507551	2573331
	1594324	7.5	0.75"	2-50	1507549	1507550	1507551	2573331
	1594330	10	1"	2-50	1507549	1507550	1507551	2573331
	1594332	12	1"	2-50	1507549	1507550	1507551	2573331
	1594341	20	1.25"	2-50	1507549	1507550	1507551	2573331
	1594350	28	1.5"	2-35	1507549	1507550	1507551	2573331
				36-50	1507552	1507553	1507554	2573332
				2-20	1507549	1507550	1507551	2573331
1594360	40	2"	21-50	1507552	1507553	1507554	2573332	
Stainless Steel	1594201	0.10	0.5"	2-50	1507549	1507550	1507551	2573333
	1594203	0.22	0.5"	2-50	1507549	1507550	1507551	2573333
	1594205	0.40	0.5"	2-50	1507549	1507550	1507551	2573333
	1594206	0.75	0.5"	2-50	1507549	1507550	1507551	2573333
	1594207	0.95	0.5"	2-50	1507549	1507550	1507551	2573333
	1594208	1.3	0.5"	2-50	1507549	1507550	1507551	2573333
	1594209	1.75	0.5"	2-50	1507549	1507550	1507551	2573333
	1594210	2.2	0.5"	2-50	1507549	1507550	1507551	2573333
	1594211	2.8	0.5"	2-50	1507549	1507550	1507551	2573333
	1594213	3.6	0.5"	2-50	1507549	1507550	1507551	2573333
	1594221	4.3	0.75"	2-50	1507549	1507550	1507551	2573333
	1594222	5	0.75"	2-50	1507549	1507550	1507551	2573333
	1594223	6.2	0.75"	2-50	1507549	1507550	1507551	2573333
	1594432	10	1"	2-50	1507556	1507557	1507558	2573334
	1594440	24	1.5"	2-50	1507556	1507557	1507558	2573334
	1594450	40	2"	2-50	1507556	1507557	1507558	2573334

\*Maximum operating steam pressure for LiveSteam humidifiers is 50 PSIG (15 PSIG on Steam Exchange Humidifiers)

\*\*Linkage Kit already included with Actuator




Actuators Maximum Close-Off Pressure



## A5 - Live Steam (2597632) Shop Drawing

### ELECTRIC ACTUATORS

For bronze 1/2" – 2" and stainless steel 1/2" – 3/4" valves, for incoming pressures from 2 to 50 psi for all valves, except for 1 1/2" which would be 2 to 34 psi and 2" which would be 2 to 19 psi.

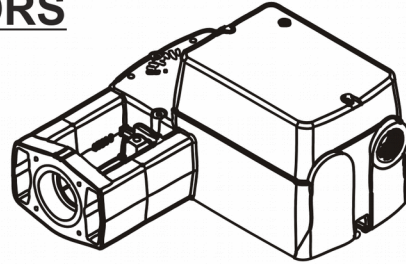

#### Actuator Inputs

**Control Signal:** On/Off, 0-10 Vdc, 4-20 mAdc

**Power Input:** See Table-1. All 24 Vac circuits are Class 2. All circuits 30 Vac and above are class 1.

**Connections:** 3 ft (91cm) appliance wire or plenum cables, enclosure accepts 1/2" (13mm) conduit connectors. For M20 metric connector, use 1/2" NPT to M20 adaptor.

#### Actuator Outputs

##### **Electrical:**

**Position Feedback Voltage (proportional or floating only):** For voltage ranges, the feedback signal is the same range as the input signal. The 4-20 mAdc current range and floating actuators have a 2-10 Vdc position feedback signal. The position feedback signal can supply up to 0.5 mA to operate up to 4 additional slave actuators.

##### **Mechanical:**

**Linear Stroke:** 1/2" (13mm) nominal.

**Approx. Stroke Timing:** Powered, 44-60 sec.

**Manual Override:** Allows positioning of valve and pre-load using manual crank.

**Right/Left Jumper:** Permits reverse acting/direct acting linear motion (0-10 Vdc and 4-20 mAdc only).

##### **Environment:**

**Shipping & Storage:** -40 to 160°F (-40 to 71°C)

**Operating:** -22 to 140°F (-30 to 60°C)

**Temperature Restrictions:** For maximum ambient 140°F (60°C) the maximum allowable fluid temperature should not exceed 366°F (186°C).

**Humidity:** 15-95%RH, non-condensing

**Location:** NEMA 1, NEMA 2 (enclosure is air plenum rated), UL Type 2 (IEC IP54) with customer supplied water tight conduit connectors.

**Overall Dimensions:** 6.76" (172mm) x 3.5" (89mm) x 6.31" (160mm)

#### **Agency Listings**

UL 873: Underwriters Laboratories (File #E9429 Category Temperature-Indicating and Regulating Equipment).

CUL: UL Listed for use in Canada by Underwriters Laboratories. Canadian Standards C22.2 No. 24-93.

Table 1

Part Number	Control Action	Voltage	Actuator Power Input						Linear Stroke Inches	Approx. Stroke Timing in Seconds @ 70°F (21°C)		Output Force Rating lb (Newton)	
			Running				Holding			Powered	Spring Return	Min.	Max Stall
			50Hz		60Hz		DC Amps	50/60Hz					
			VA	W	VA	W				W			
1507549	0-10 Vdc	24 Vac±20% 20-30 Vdc	6.6	4.2	6.6	4.2	0.14	1.5	1/2	60	16	-	-
1507550	4-20 mAdc		5.3	4.1	5.3	4.1	0.15	1.2		44	19	-	-
1507551	On/Off												



Electric Actuator  
Part # 1507549, 1507550, 1507551


## A6 - Live Steam (2597632) Shop Drawing

### 0-10V DIGITAL HUMIDISTAT Wiring Diagram for Livesteam

Part #	Description
1510142	0-10V Digital Wall Humidistat
2520266	0-10V Digital Duct Humidistat pkg.

Warning: Failure to wire the humidistat in accordance with the wiring diagram could permanently damage the electronics. Such errors will void the warranty.  
Cabling between controls and unit should be shielded 18 AWG

#### HUMIDISTAT TO ACTUATOR CONNECTIONS

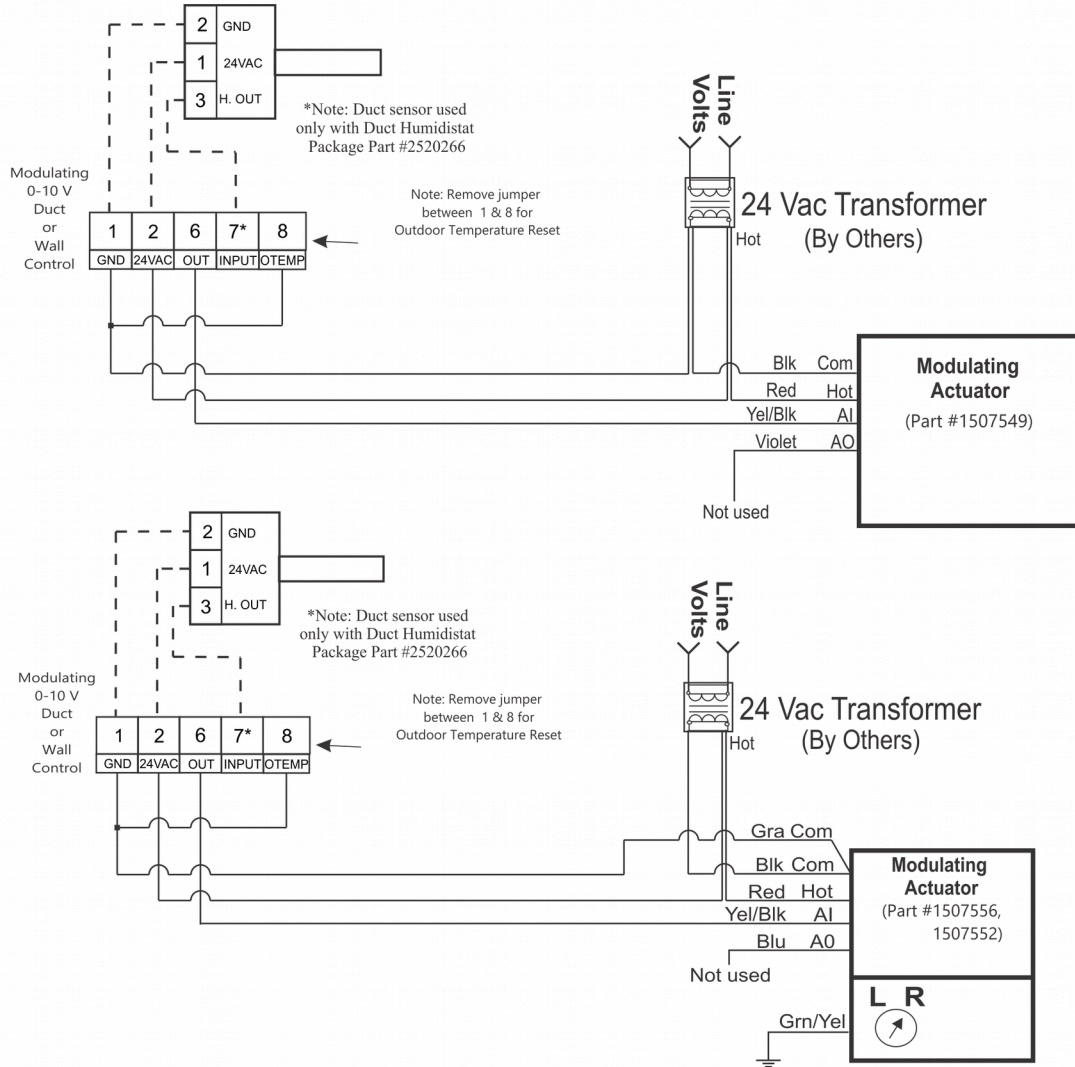


# A7 - Live Steam (2597632) Wiring Diagram

## Wiring Diagram for LiveSteam

### Modulation Control with On/Off Inputs

Warning: Failure to wire the humidistat in accordance with the wiring diagram could permanently damage the electronics. Such errors will void the warranty.

Cabling between controls and unit should be shielded 18 AWG

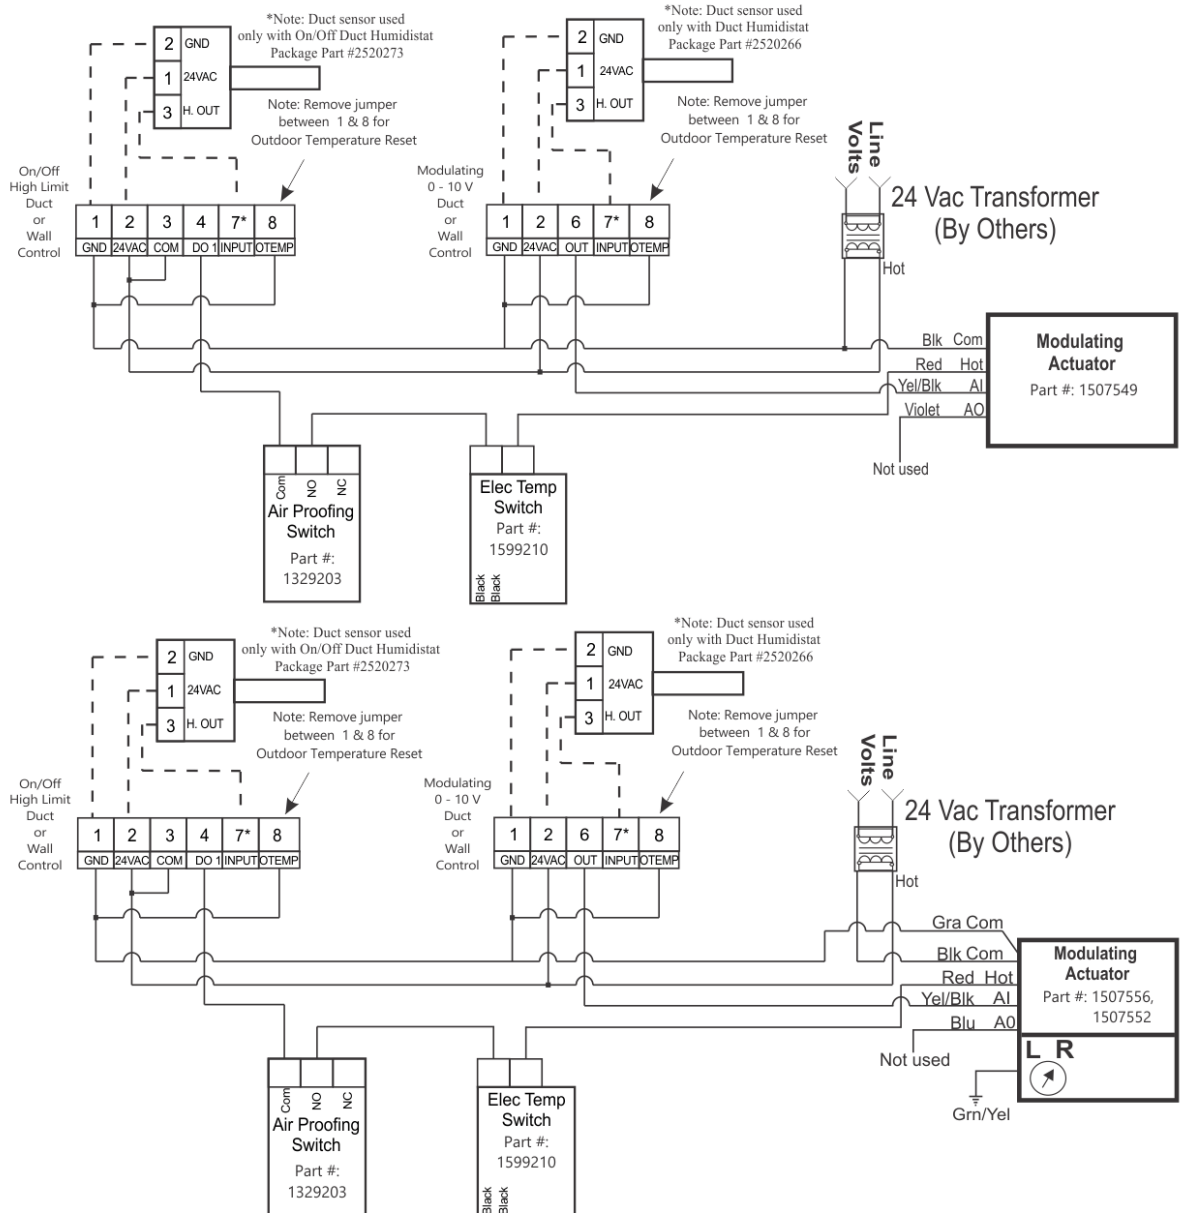

Controls for LiveSteam Application

Wiring Diagram/Installation Instruction

Part Number: 2571675 Revision: C Date: 28/11/2018

## **A8 - Live Steam (2597652) Description**

**LIVESTEAM Wye Strainer**, used in the supply steam line to remove impurities by filtering the steam through a strainer screen.

## A9 - Live Steam (2597652) Shop Drawing


### STRAINER DATA

Strainer Type:	"Y" Type
Strainer Size:	½" to 3"
Connection:	NPT
Body Material:	Cast Iron
Screen Material:	20 Mesh Stainless Steel
Pressure (non-shock):	250 psi (1725 kPa) - 406°F (208°C)
Installation:	The strainer should be installed with the flow direction as indicated on the body, in a vertical down or horizontal pipe line. The strainer must be accessible for periodic removal of accumulated debris by either blowing down or removal and cleaning of the screen.

<b>Type</b>	IT
<b>Sizes</b>	1/2" to 3"
<b>Connections</b>	NPT
<b>Construction</b>	Cast Iron
<b>Maximum Saturated Steam Pressure</b>	250 psig
<b>Standard Screen</b>	20 Mesh Type 304 Stainless Steel

No	Part	Material
1	Body	Cast Iron
2	Bushing (1/4" - 2")	Malleable Iron
2A	Cap (2 1/2" - 3")	Cast Iron
3	Cap Gasket (2 1/2" & 3")	Graphite
4	Standard Screen	Stainless Steel Type 304

Dimension	A	B	C	Weight
Size	inch	inch	NPT	lbs
1/2	3-3/16	2-1/16	3/8"	1.2
3/4	3-3/4	2-7/16	1/2"	2.9
1	4	2-5/8	3/4"	4.3
1-1/4	5	3-3/8	1"	6.5
1-1/2	5-3/4	3-7/8	1-1/4"	9.6
2	7	4-3/4	1-1/2"	12.9
2-1/2	9-1/4	5-7/8	1-1/4"	22.0
3	10.0	6	1-1/4"	35.0

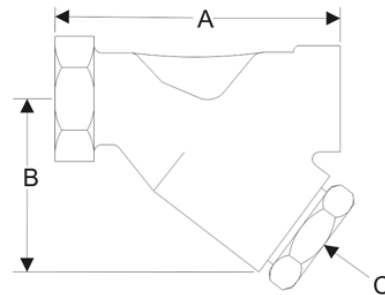

## A10 - Live Steam (2597652) Shop Drawing

### STRAINER DATA

Steam Pressure		Strainer Nominal Diameter in Inches											
		3/4		1		1 1/4		1 1/2		2		2 1/2	
psig	kPa	lbs/hr	kg/hr	lbs/hr	kg/hr	lbs/hr	kg/hr	lbs/hr	kg/hr	lbs/hr	kg/hr	lbs/hr	kg/hr
2	14	105	48	182	83	255	116	346	157	638	290	912	414
5	34	124	56	215	98	301	137	409	186	753	342	1075	489
10	69	155	70	270	123	378	172	512	233	944	429	1348	613
15	103	186	85	324	147	454	206	616	280	1135	516	1621	737
20	138	218	99	379	172	530	241	720	327	1326	603	1894	861
25	172	249	113	433	197	607	276	824	374	1517	690	2167	985
30	207	281	128	488	222	683	311	927	421	1708	776	2440	1109
35	241	312	142	543	247	760	345	1031	469	1899	863	2713	1233
40	276	343	156	597	271	836	380	1135	516	2090	950	2986	1357
45	310	375	170	652	296	912	415	1238	563	2281	1037	3259	1481
50	345	406	185	706	321	989	450	1342	610	2472	1124	3532	1605



Strainer Size Performance Data

## **A11 - Live Steam (2577157) Description**


**LIVESTEAM Steam Trap**, float and thermostatic for pressures up to 15 psig. The trap allows removal of condensate from a pressurized steam system while preventing the passage of steam.

## A12 - Live Steam (2577157) Shop Drawing

### TRAP DATA

<b>Trap Type:</b>	Float and Thermostatic
<b>Trap Connection:</b>	3/4" NPT
<b>Construction:</b>	Cast Iron Body and Cover. Stainless Steel Internals.
<b>Maximum Operating Pressure:</b>	15 psig (103 kPa) Nortec Part #2577157 75 psig (103 kPa) Nortec Part #1599602
<b>Installation:</b>	Full port isolating valves should be placed to permit servicing. The trap should be installed below the drainage point with a collecting leg before the trap, in a position so that the float arm is in a horizontal plane so that the float rises and falls vertically, and with the direction of flow as indicated on the body. The trap has 4 orifices and 2 plugs to facilitate installation.
<b>Maintenance:</b>	This product can be maintained without disturbing the piping connections. Complete isolation from both supply and return line is required before any servicing is performed.

Dimensions in (cm)								Cleanout port	Ports
	A	B	C	D	E	Weight			
2577157/ 1599602	5-3/4 (14.6)	5-11/16 (14.4)	4-7/8 (12.3)	3-3/8 (8.5)	1-5/32 (2.9)	12 lbs (5.4 kg)	1/4"NPT	4 ports, 2 plugs, 3/4" NPT	

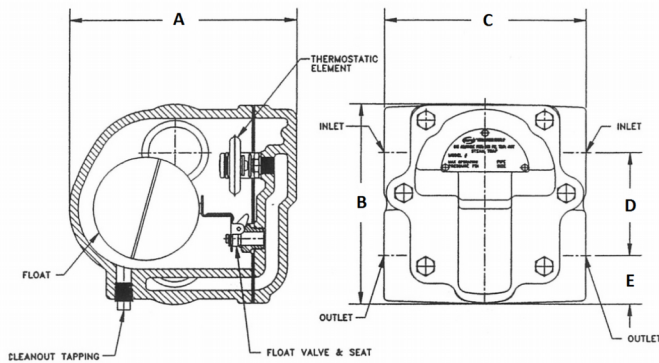

Construction Materials	
Part	Material
Body	Class 30 Cast Iron
Cap	Class 30 Cast Iron
Disc	Stainless Steel & Brass
Hinge	Brass
Pin, Hinge	Stainless Steel
Gasket	non Asbestos Fiber
Seat	SST, Brass Holder
Valve	Stainless Steel
Clip	Stainless Steel
Lever & float	Stainless Steel
Plug 1/4" NPT	Steel



Steam Trap - F&T Cast Iron  
Nortec Part # 2577157, 1599602



## **A13 - SAM-e (2549922) Description**

### **SAM-e HEADERS**

The SAM-e distributes clean steam, precisely controlled, uniformly into the entire air stream, and void of any condensate spray. Steam distribution takes place via steam tubes with integrated nozzles. The steam is kept dry as condensate is drained through the main header.

The stainless steel headers are typically installed with vertical tubes for horizontal airflow applications, but can also be mounted horizontally (10 deg. incline from horizontal) for vertical airflow applications. The headers can be ordered 3, 6, 9, or 12 inch center to center tube spacing for maximum flexibility and optimal steam distribution..

Manufactured out of high grade 304 stainless steel, the header features welded inlet and condensate connections to ensure leak-free operation. Stainless steel inlet adapter is factory supplied for connection to steam supply line(s), allowing maximum flexibility, and simplification of installation. Specialized synthetic grommets form an air and water-tight seal around the base of the steam tubes, simplifying installation and ensuring reliable leak-free operation.


Headers are also available with optional 304 stainless steel insulation. This metal shielding creates an insulating air-gap around the header which minimizes heat transfer by conduction and convection, while the reflective surface minimizes heat transfer by radiation. Insulating the header in this manner increases energy efficiency by up to 70%, and results in significantly reduced airstream heat gain and steam condensate loss.

### FEATURES

- Steam tubes with end support bracket for easy installation.
- All stainless steel distributors and nozzles ensure permanent bond.
- Stainless steel header with rubber grommet seals for easy installation of steam tubes.
- Includes hose cuffs and clamps for steam line connections.
- Adjustable mounting frame available for quick and easy installation.
- Available with 3", 6", 9" or 12" center to center steam tube spacing.
- Available insulated for increased energy efficiency and reduced airstream heat gain.
- High capacities.
- Ten year limited warranty.

# A14 - SAM-e (2549922) Shop Drawing

Duct Width		A		B		C		Duct Height		D (Tube height)		E Min.		E Max.	
in	cm	in	cm	in	cm	in	cm	in	cm	in	cm	in	cm	in	cm
18	45.7	13 1/8	33.3	14 7/8	37.8	16 1/4	41.3	18	45.7	5 1/2	14.0	17	43.2	24 2/3	62.7
24	61.0	19 1/8	48.6	20 7/8	53.0	22 1/4	56.5	24	61.0	11 1/2	29.2	23	58.4	30 2/3	77.9
30	76.2	25 1/8	63.8	26 7/8	68.3	28 1/4	71.8	30	76.2	17 1/2	44.5	29	73.7	36 2/3	93.1
36	91.4	31 1/8	79.1	32 7/8	83.5	34 1/4	87.0	36	91.4	23 1/2	59.7	35	88.9	42 2/3	108.4
42	106.7	37 1/8	94.3	38 7/8	98.7	40 1/4	102.2	42	106.7	29 1/2	74.9	41	104.1	48 2/3	123.6
48	121.9	43 1/8	109.5	44 7/8	114.0	46 1/4	117.5	48	121.9	35 1/2	90.2	47	119.4	54 2/3	138.9
54	137.2	49 1/8	124.8	50 7/8	129.2	52 1/4	132.7	54	137.2	41 1/2	105.4	53	134.6	60 2/3	154.1
60	152.4	55 1/8	140.0	56 7/8	144.5	58 1/4	148.0	60	152.4	47 1/2	120.7	59	149.9	66 2/3	169.3
66	167.6	61 1/8	155.3	62 7/8	159.7	64 1/4	163.2	66	167.6	53 1/2	135.9	65	165.1	72 2/3	184.6
72	182.9	67 1/8	170.5	68 7/8	174.9	70 1/4	178.4	72	182.9	59 1/2	151.1	71	180.3	78 2/3	199.8
78	198.1	73 1/8	185.7	74 7/8	190.2	76 1/4	193.7	78	198.1	65 1/2	166.4	77	195.6	84 2/3	215.1
84	213.4	79 1/8	201.0	80 7/8	205.4	82 1/4	208.9	84	213.4	71 1/2	181.6	83	210.8	90 2/3	230.3
90	228.6	85 1/8	216.2	86 7/8	220.7	88 1/4	224.2	90	228.6	77 1/2	196.9	89	226.1	96 2/3	245.5
96	243.8	91 1/8	231.5	92 7/8	235.9	94 1/4	239.4	96	243.8	83 1/2	212.1	95	241.3	102 2/3	260.8
102	259.1	97 1/8	246.7	98 7/8	251.1	100 1/4	254.6	102	259.1	89 1/2	227.3	101	256.5	108 2/3	276.0
108	274.3	103 1/8	261.9	104 7/8	266.4	106 1/4	269.9	108	274.3	95 1/2	242.6	107	271.8	114 2/3	291.3
114	289.6	109 1/8	277.2	110 7/8	281.6	112 1/4	285.1	114	289.6	101 1/2	257.8	113	287.0	120 2/3	306.5
120	304.8	115 1/8	292.4	116 7/8	296.9	118 1/4	300.4	120	304.8	107 1/2	273.1	119	302.3	126 2/3	321.7
126	320.0	121 1/8	307.7	122 7/8	312.1	124 1/4	315.6	126	320.0	113 1/2	288.3	125	317.5	132 2/3	337.0
132	335.3	127 1/8	322.9	128 7/8	327.3	130 1/4	330.8	132	335.3	119 1/2	303.5	131	332.7	138 2/3	352.2
138	350.5	133 1/8	338.1	134 7/8	342.6	136 1/4	346.1	138	350.5	125 1/2	318.8	137	348.0	144 2/3	367.5
144	365.8	139 1/8	353.4	140 7/8	357.8	142 1/4	361.3	144	365.8	131 1/2	334.0	143	363.2	150 2/3	382.7

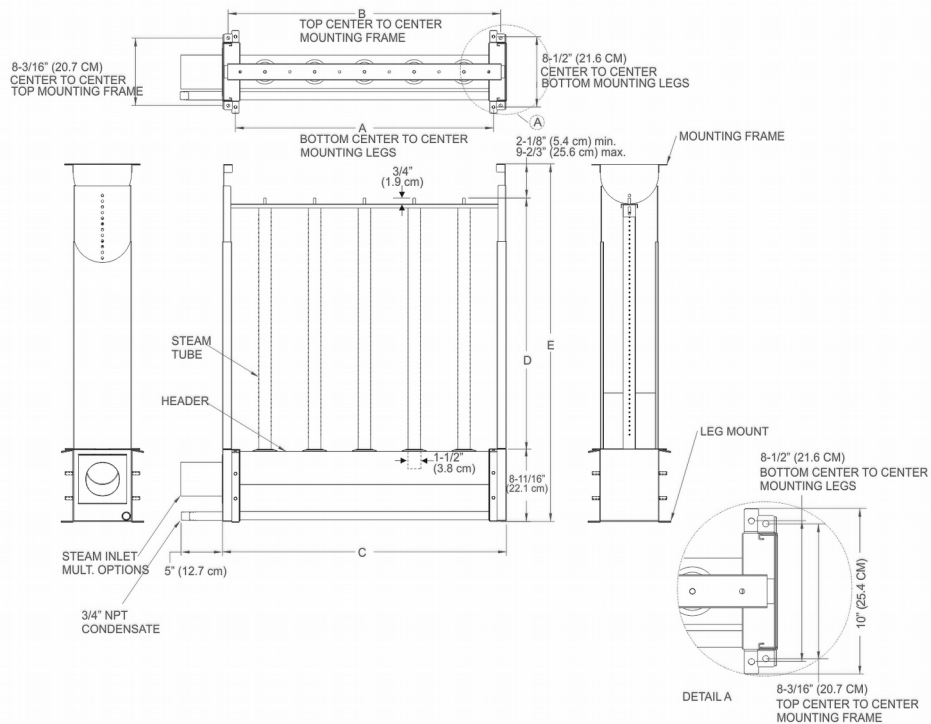

## A15 - SAM-e (2549922) Shop Drawing

Air Velocity [ fpm (m/s) ]	Air Pressure Loss [ in(mm) of water column ]			
	SAM-e Tube Spacing			
	3" (762 mm)	6" (152 mm)	9" (229 mm)	12" (305 mm)
500 (2.5)	0.01 (0.3)	0.01 (0.3)	No measurable data	
750 (3.8)	0.03 (0.8)	0.01 (0.3)		
1000 (5.1)	0.05 (1.3)	0.02 (0.5)		
1250 (6.4)	0.07 (1.8)	0.03 (0.8)		
1500 (7.6)	0.09 (2.3)	0.04 (1.0)	0.01 (0.3)	0.01 (0.3)
1750 (8.9)	0.10 (2.5)	0.06 (1.5)	0.01 (0.3)	0.01 (0.3)
2000 (10.2)	0.12 (3.0)	0.08 (2.0)	0.01 (0.3)	0.01 (0.3)



SAM-e Static Air Pressure Table  
July 15, 2016

## **A16 - SAM-e (1503419) Description**

**Steam DISTRIBUTOR, Type B for SAM-e, 304ss, suitable for capacities up to 36 lbs/hr (16 kg/hr).**

Constructed of 1.5" O.D. (3.8 cm) high-grade stainless steel tubing, the distributors can accommodate duct heights between 24"-144" for in-duct header mounting, and between 18"-144" for outside duct header mounting. Each distributor has 48 stainless steel nozzles to evenly disperse steam into the duct or air handling unit.

The steam tubes come equipped with evenly spaced stainless steel nozzles providing optimum steam distribution, over the entire length of tube. These nozzles extend into the center of the steam tube ensuring only condensate-free steam is released. Condensate drains out of the steam tubes, and through the header, eliminating the need for jacketed tubes. A permanent bond between the nozzle and steam tube is made when the nozzle is hydraulically pressed into the tube. They have the same thermal expansion characteristics guaranteeing a permanent union. The specifically sized orifices ensure consistent output from each nozzle.


Steam distributors are available with optional 304 stainless steel insulation. Tube insulation consists of two 304 stainless steel shields, which are clamped onto the distributor tubes forming an insulating air gap around the tube while leaving a small gap for the nozzles to release steam. For tube insulation, contact and heat transfer between stainless steel shields and distributor to be limited using a 'knife edge' type angled contact. The air gap reduces heat transfer through conduction and convection, while the reflective surfaces minimize heat transfer through radiation.

### FEATURES

- Capacities of 36 lbs/hr (16 kg/hr) per tube.
- Nozzle design ensures only condensate-free steam is dispersed and prevents spitting.
- Stainless steel nozzles are pressed into tube ensuring permanent bond.
- Available insulation improves energy efficiency by as much as 70%.
- Can be retrofit with insulation in the field.
- Maintenance free.
- Ten year limited warranty.

## A17 - SAM-e (1503419) Shop Drawing

### 304 SS SAM-e Short Absorption Manifold Tubes

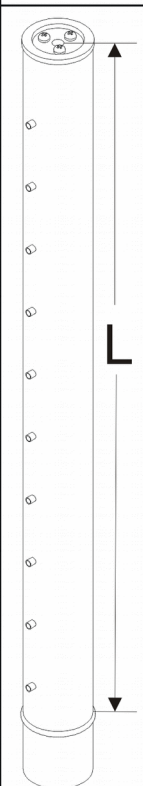In-Duct Height Including Header in (cm)	Type A 15 lbs/hr (7 kg/hr)	Type B 35 lbs/hr (16 kg/hr)	Type B+ 55 lbs/hr (25 kg/hr)	Type C 75 lbs/hr (34 kg/hr)	"L" Dimension in (cm)	In-Duct Optional Mounting Frame	Steam Tube Profile
18 (45.7)	1503388	N/A	N/A	N/A	5.5 (14.0)	1504697	
24 (61.0)	1503389	1503411	N/A	N/A	11.5 (29.2)		
30 (76.2)	1503390	1503412	1509391	N/A	17.5 (44.5)	1503469	
36 (91.4)	1503391	1503413	1509392	1503440	23.5 (59.7)		
42 (106.7)	1503392	1503414	1509393	1503441	29.5 (74.9)	1503470	
48 (121.9)	1503393	1503415	1509394	1503442	35.5 (90.2)		
54 (137.2)	1503394	1503416	1509395	1503443	41.5 (105.4)		
60 (152.4)	1503395	1503417	1509396	1503444	47.5 (120.7)		
66 (167.6)	1503396	1503418	1509397	1503445	53.5 (136.9)	1503471	
72 (182.9)	1503397	1503419	1509398	1503446	59.5 (151.1)		
78 (198.1)	1503398	1503420	1509399	1503447	65.5 (166.4)		
84 (213.4)	1503399	1503421	1509400	1503448	71.5 (181.5)		
90 (228.6)	1503400	1503422	1509401	1503449	77.5 (196.9)	1503472	
96 (243.8)	1503401	1503423	1509402	1503450	83.5 (212.1)		
102 (259.1)	1503402	1503424	1509403	1503451	89.5 (227.3)		
108 (274.3)	1503403	1503425	1509404	1503452	95.5 (242.6)		
114 (289.6)	1503404	1503426	1509405	1503453	101.5 (257.8)	1503472	
120 (304.8)	1503405	1503427	1509406	1503454	107.5 (273.1)		
126 (320.0)	1503406	1503428	1509407	1503455	113.5 (288.3)		
132 (335.3)	1503407	1503429	1509408	1503456	119.5 (303.5)		
138 (350.5)	1503408	1503430	1509409	1503457	125.5 (318.8)	1503472	
144 (365.8)	1503409	1503431	1509410	1503458	131.5 (334.0)		

## **A18 - SAM-e (2538853) Description**


### **SAM-e Tube Insulation (1 req'd for each tube), compatible with all SAM-e and mini SAM-e tubes.**

Constructed high quality 304 stainless steel, this shielding provides an insulating air gap around the steam tubes. The insulating air-gap significantly reduces energy losses from hot distributor tubes. Insulation can be factory installed on new orders or easily retrofit to existing installations. When ordering, order insulation to match tube length.

#### **FEATURES**

- Improve energy efficiency by as much as 70%.
- Reduce condensate losses.
- Minimal heat gain into air-stream.
- Aerodynamic design minimizes pressure losses.
- Fiberglass free and non-hygroscopic for hygienic operation.
- Easily retrofit to existing installations.
- Maintenance free.
- Tube insulation consists of two stainless steel shields that are clamped onto the distributor tubes, leaving a small gap for the steam nozzles to release steam. Contact and heat transfer between the insulating shields and the tube is prevented by using an angled knife edge along each shield. The resulting air gap around the tube reduces heat transfer through conduction and convection, while the reflective surfaces minimize heat transfer through radiation.

# A19 - SAM-e (2538853) Shop Drawing

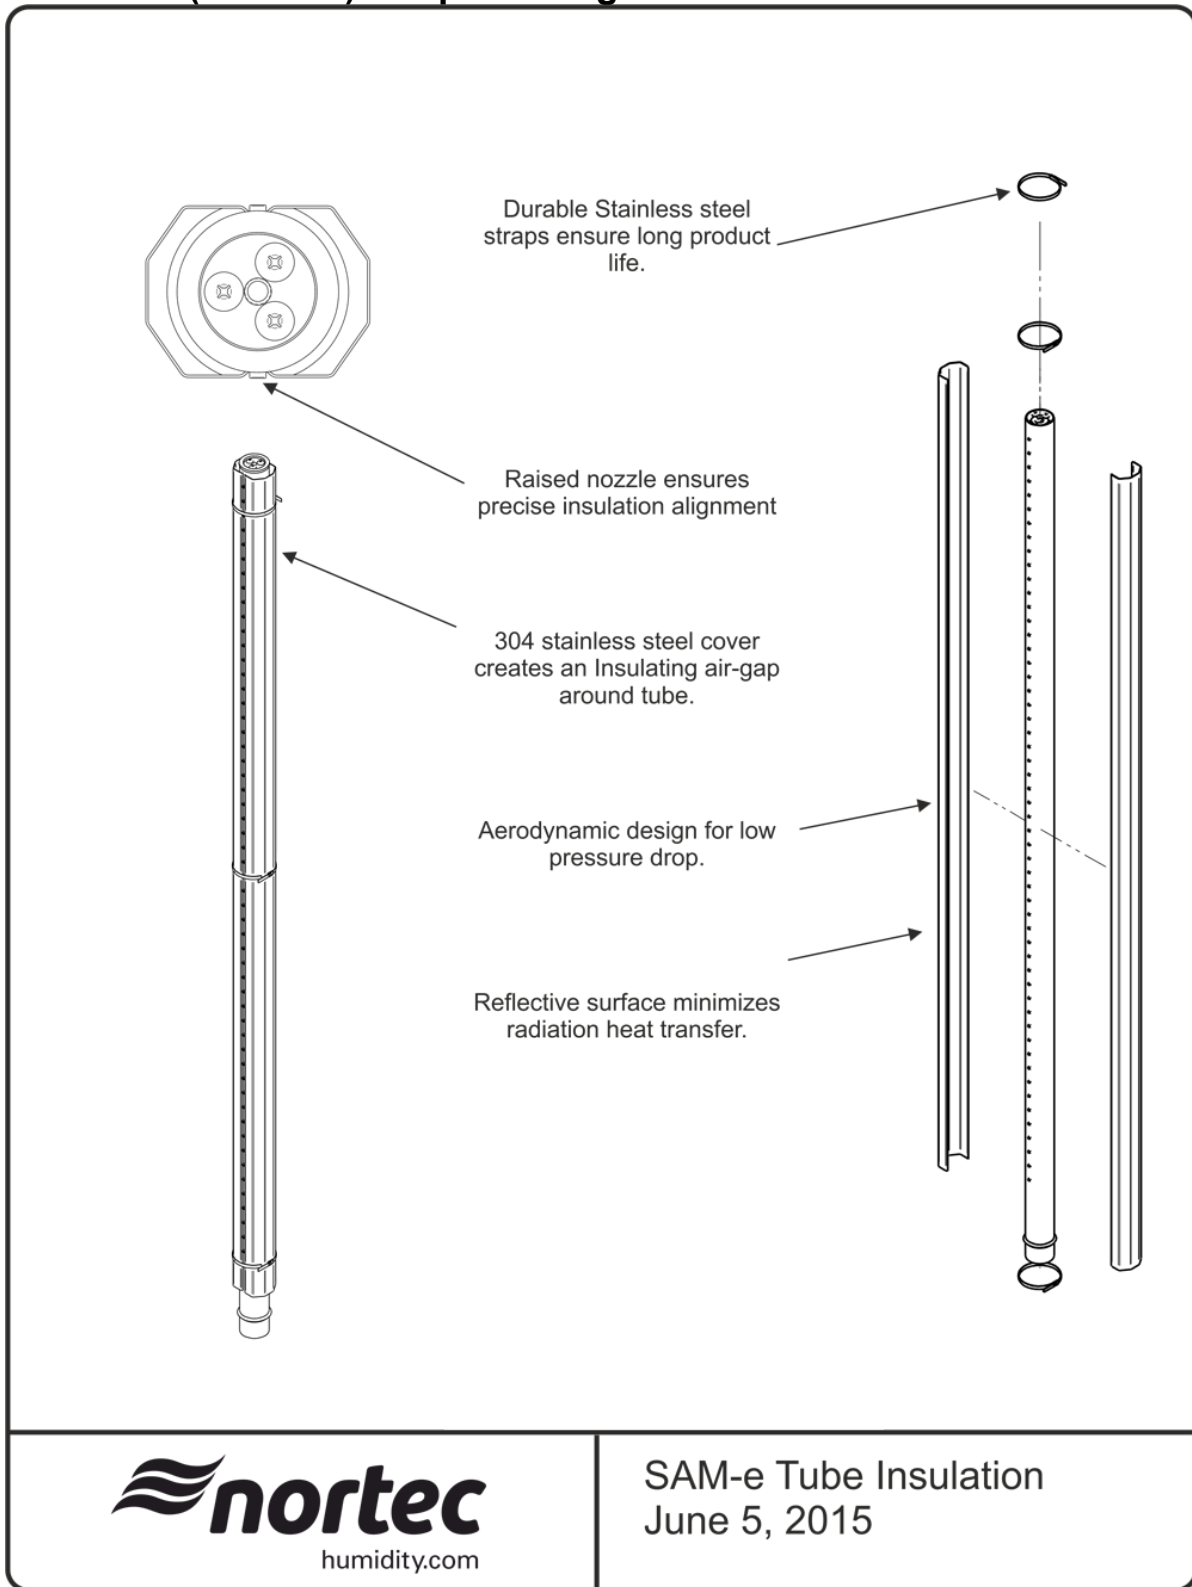


## **A20 - SAM-e (2521405) Description**

**Mounting FRAME, Adjustable for SAM-e**, Constructed of stainless steel, the mounting frame provides support and allows for a quick and easy installation. The telescopic frame can be adjusted to suit the duct or air handling unit. The mounting frame is optional for horizontal duct applications, but required for vertical duct applications.



## A21 - SAM-e (2521405) Shop Drawing

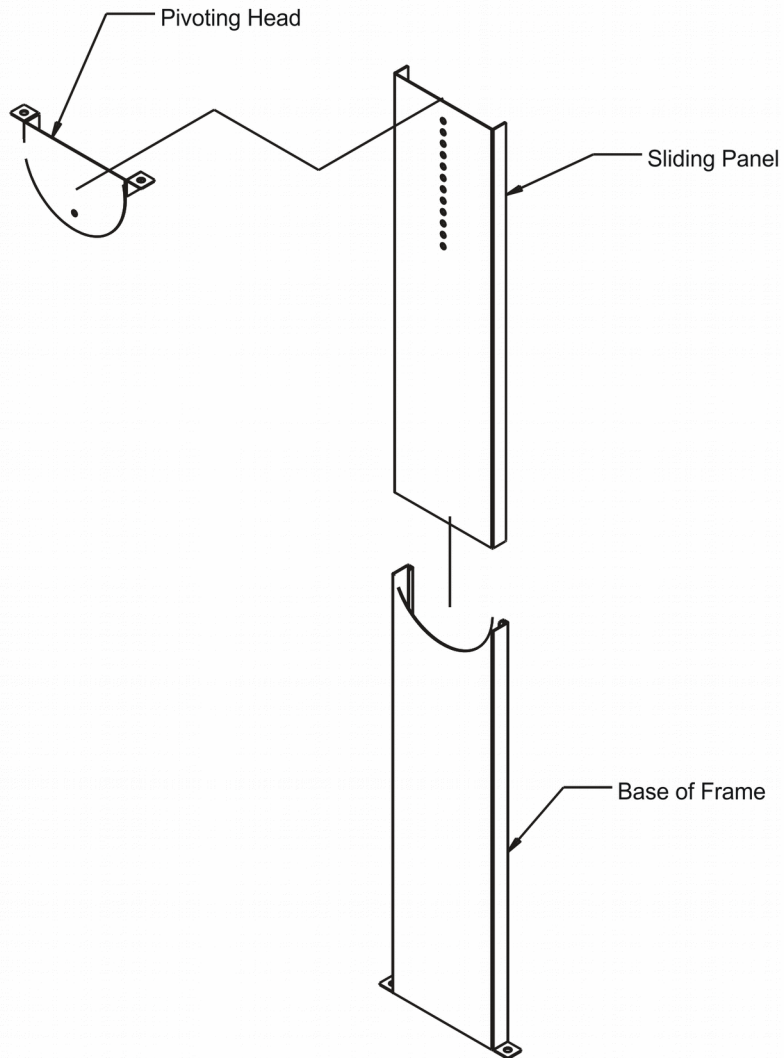

## **A22 - SAM-e (1503476) Description**


### **Pressure Inlet Adapter Kit for SAM-e**

Provides an NPT threaded connection for connecting a SAM-e Short Absorption Manifold to a LiveSteam or pressure steam system. Inlet adapter kits are constructed from high quality stainless steel and are factory welded to the SAM-e header. Pressure inlet kits also include an internal baffle to separate steam from condensate allowing operation without the need for an external separator.

## A23 - SAM-e (1503476) Installation

# Pressurized Steam


Note: The SAM-e header functions as a steam separator, therefore an external steam separator is not required.

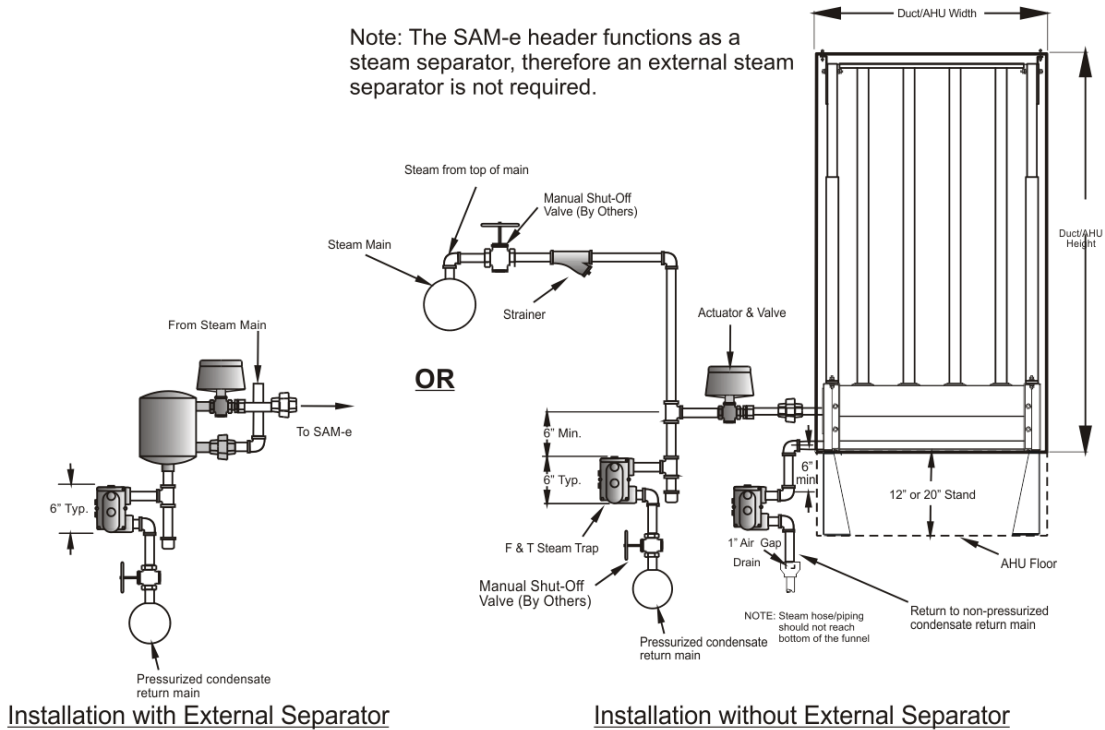


Installation with External Separator

Installation without External Separator

## A24 - SAM-e (1503476) Schematic

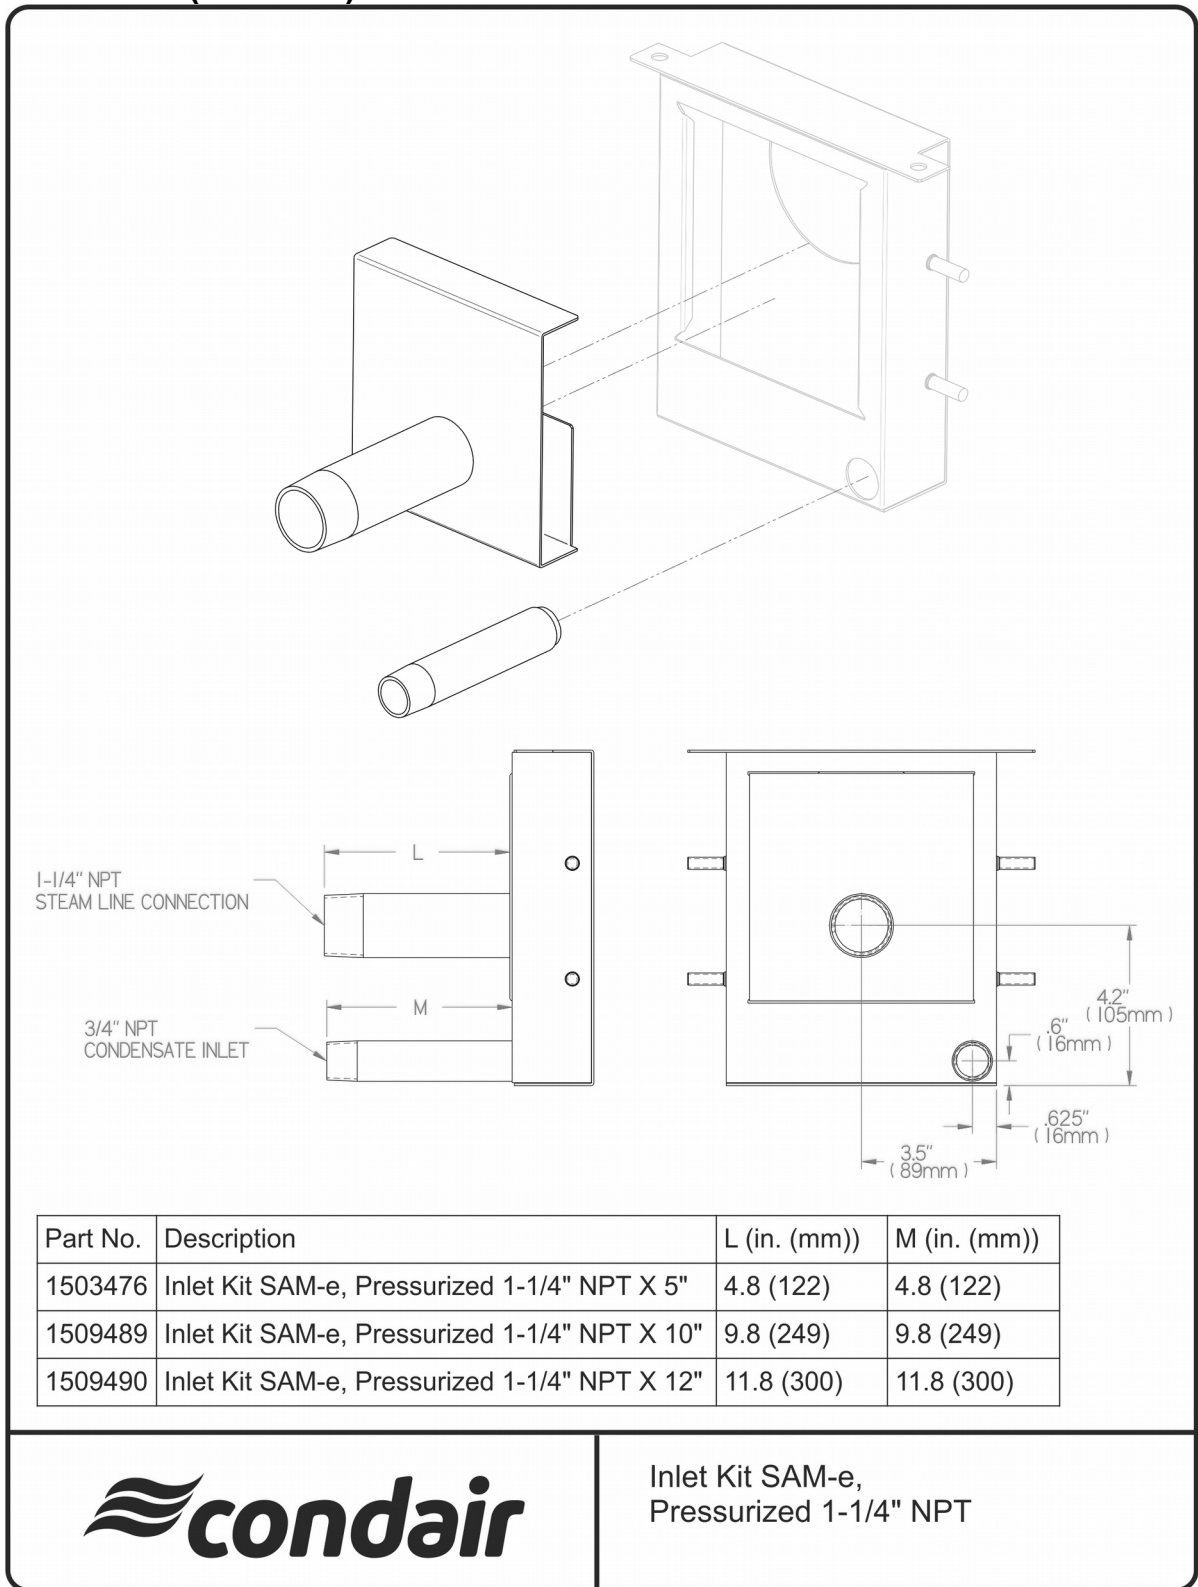

## A25 - SAM-e (1503476) Shop Drawing

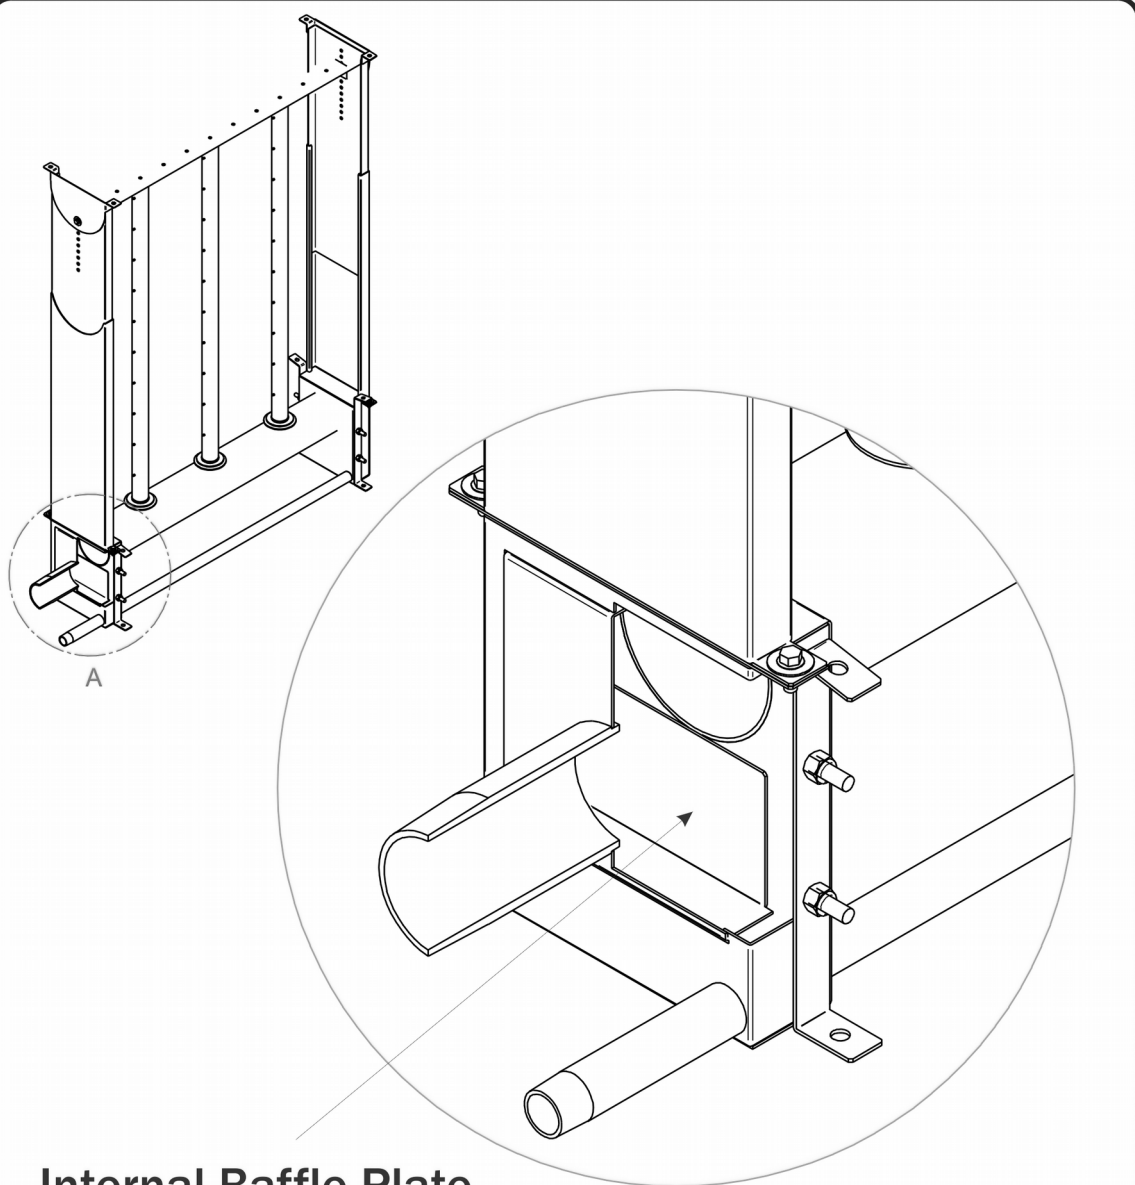

### Internal Baffle Plate

### DETAIL A

All pressurized SAM-e inlet kits come with a standard internal baffle plate. The baffle plate redirects the flow of steam causing condensate to 'fall out', eliminating the need to install an external steam separator.

## **A26 - SAM-e (2591657) Description**

**SAM-e Top Center Mount Bracket:** provides additional support and rigidity for cases where a SAM-e will be shipped fully assembled inside of an air handling unit. This option is typically used when shipping the SAM-e for installation at an Air Handling Unit manufacturer.

## **A27 - SAM-e (2591658) Description**

**SAM-e Side Yoke (x2)**, provides an additional two adjustable side yokes. This can be used as either a replacement for existing yokes, or to double up the existing yokes for additional strength.

## **A28 - SAM-e (1503391) Description**

**Steam DISTRIBUTOR, Type A for SAM-e, 304ss, suitable for capacities up to 15 lbs/hr (7 kg/hr).**

Constructed of 1.5" O.D. (3.8 cm) high-grade 304 stainless steel tubing, the distributors can accommodate duct heights between 18"-144" for in-duct header mounting, and between 8"-144" for outside duct header mounting. Each distributor has 20 stainless steel nozzles to evenly disperse steam into the duct or air handling unit.

The steam tubes come equipped with evenly spaced stainless steel nozzles providing optimum steam distribution, over the entire length of tube. These nozzles extend into the center of the steam tube ensuring only condensate-free steam is released. Condensate drains out of the steam tubes, and through the header, eliminating the need for jacketed tubes. A permanent bond between the nozzle and steam tube is made when the nozzle is hydraulically pressed into the tube. They have the same thermal expansion characteristics guaranteeing a permanent union. The specifically sized orifices ensure consistent output from each nozzle.


Steam distributors are available with optional 304 stainless steel insulation. Tube insulation consists of two 304 stainless steel shields, which are clamped onto the distributor tubes forming an insulating air gap around the tube while leaving a small gap for the nozzles to release steam. For tube insulation, contact and heat transfer between stainless steel shields and distributor to be limited using a 'knife edge' type angled contact. The air gap reduces heat transfer through conduction and convection, while the reflective surfaces minimize heat transfer through radiation.

### FEATURES

- Capacities of 15 lbs/hr (7 kg/hr) per tube.
- Nozzles design ensures only dry steam is dispersed and prevents spitting.
- Stainless steel nozzles are pressed into tube ensuring permanent bond.
- Available insulation improves energy efficiency by as much as 70%.
- Can be retrofit with insulation in the field.
- Maintenance free.
- Ten year limited warranty.



## A29 - SAM-e (1503473) Schematic

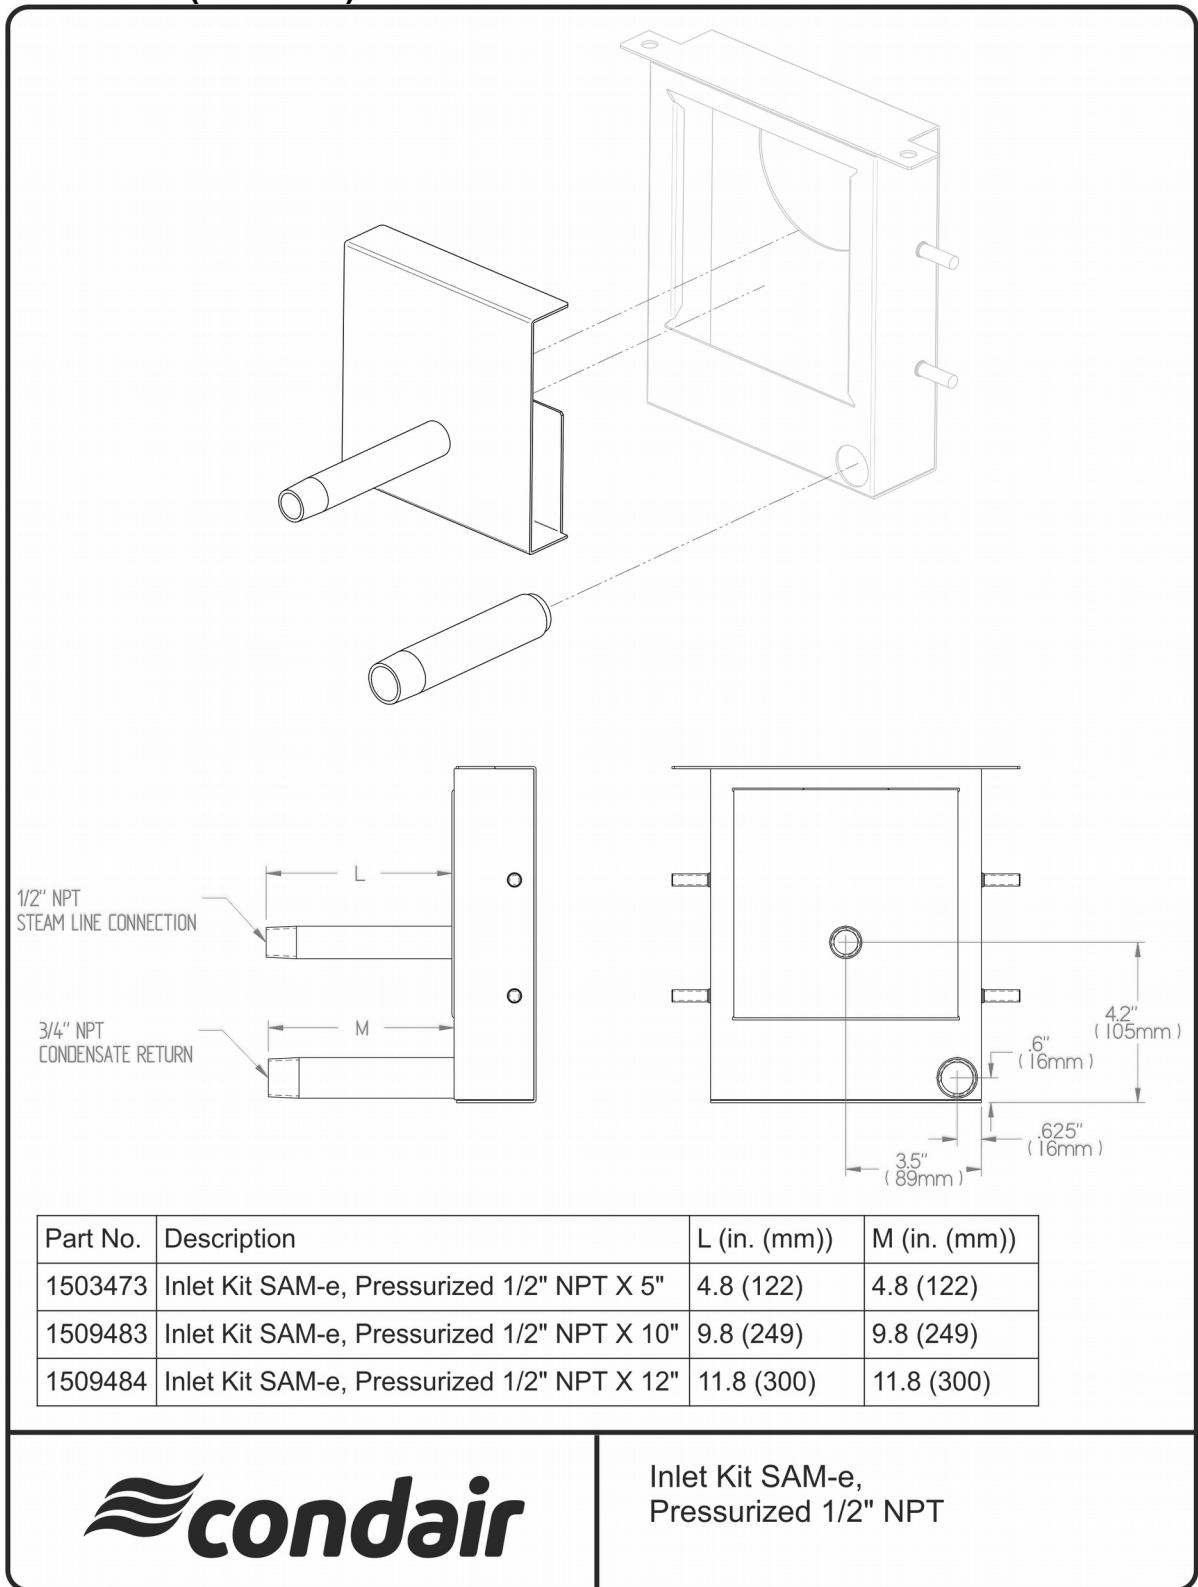


## **A30 - Mini SAM-e (2538925) Description**

**SAM-e Header Insulation**, compatible with all SAM-e and mini SAM-e headers. Constructed from high quality 304 stainless steel, this shielding provides an insulating air gap around the header. The insulating air-gap significantly reduces energy losses from hot distributor headers. Insulation can be factory installed on new orders or easily retrofit to existing installations. When ordering, order insulation to match header length.


### FEATURES

- Improve energy efficiency by as much as 70%.
- Reduced condensate losses.
- Minimal heat gain into air-stream.
- Aerodynamic design minimizes pressure losses.
- Fiberglass free and non-hygroscopic for hygienic operation.
- Easily retrofit to existing installations.
- Maintenance free.
- Header insulation consists of a stainless steel shield that is clamped onto the distributor header, leaving a small gap for the steam tubes to protrude. Contact and heat transfer between the insulating shield and the tube is prevented by using strips of synthetic foam insulation. The resulting air gap around the header reduces heat transfer through conduction and convection, while the reflective surfaces minimize heat transfer through radiation.

# A31 - Mini SAM-e (2538925) Shop Drawing

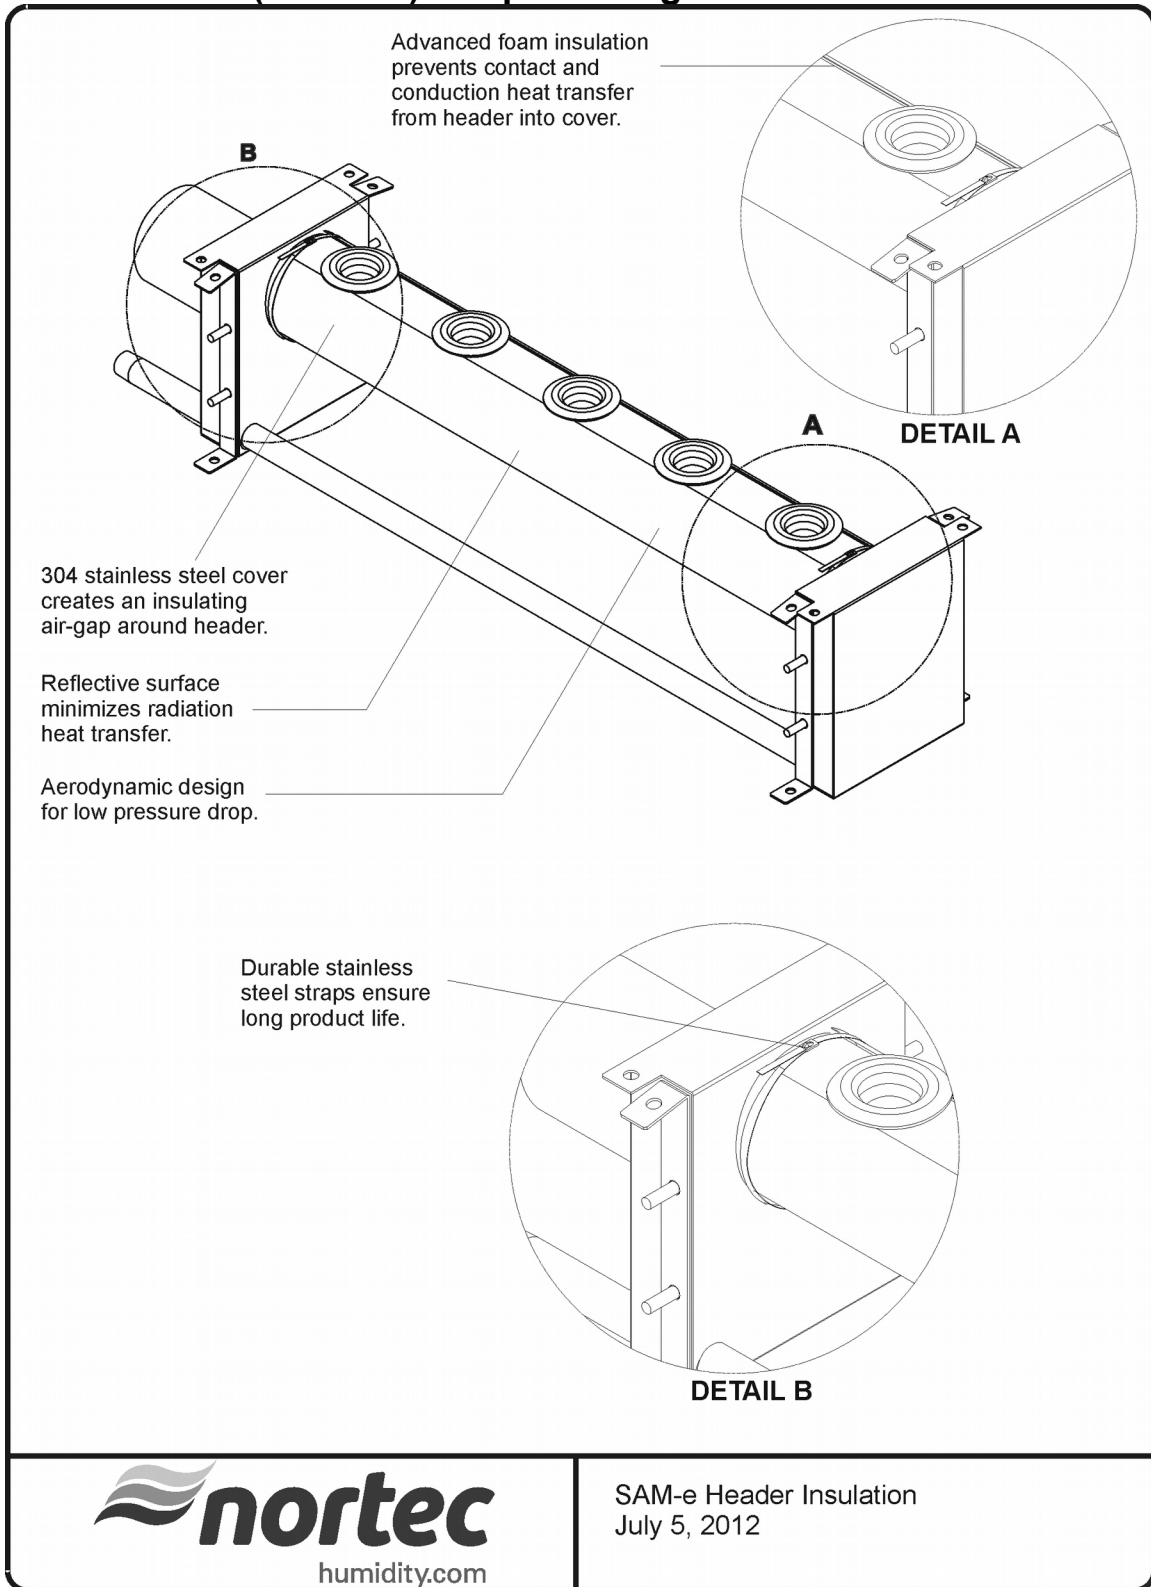

## A32 - Mini SAM-e (2538925) Shop Drawing

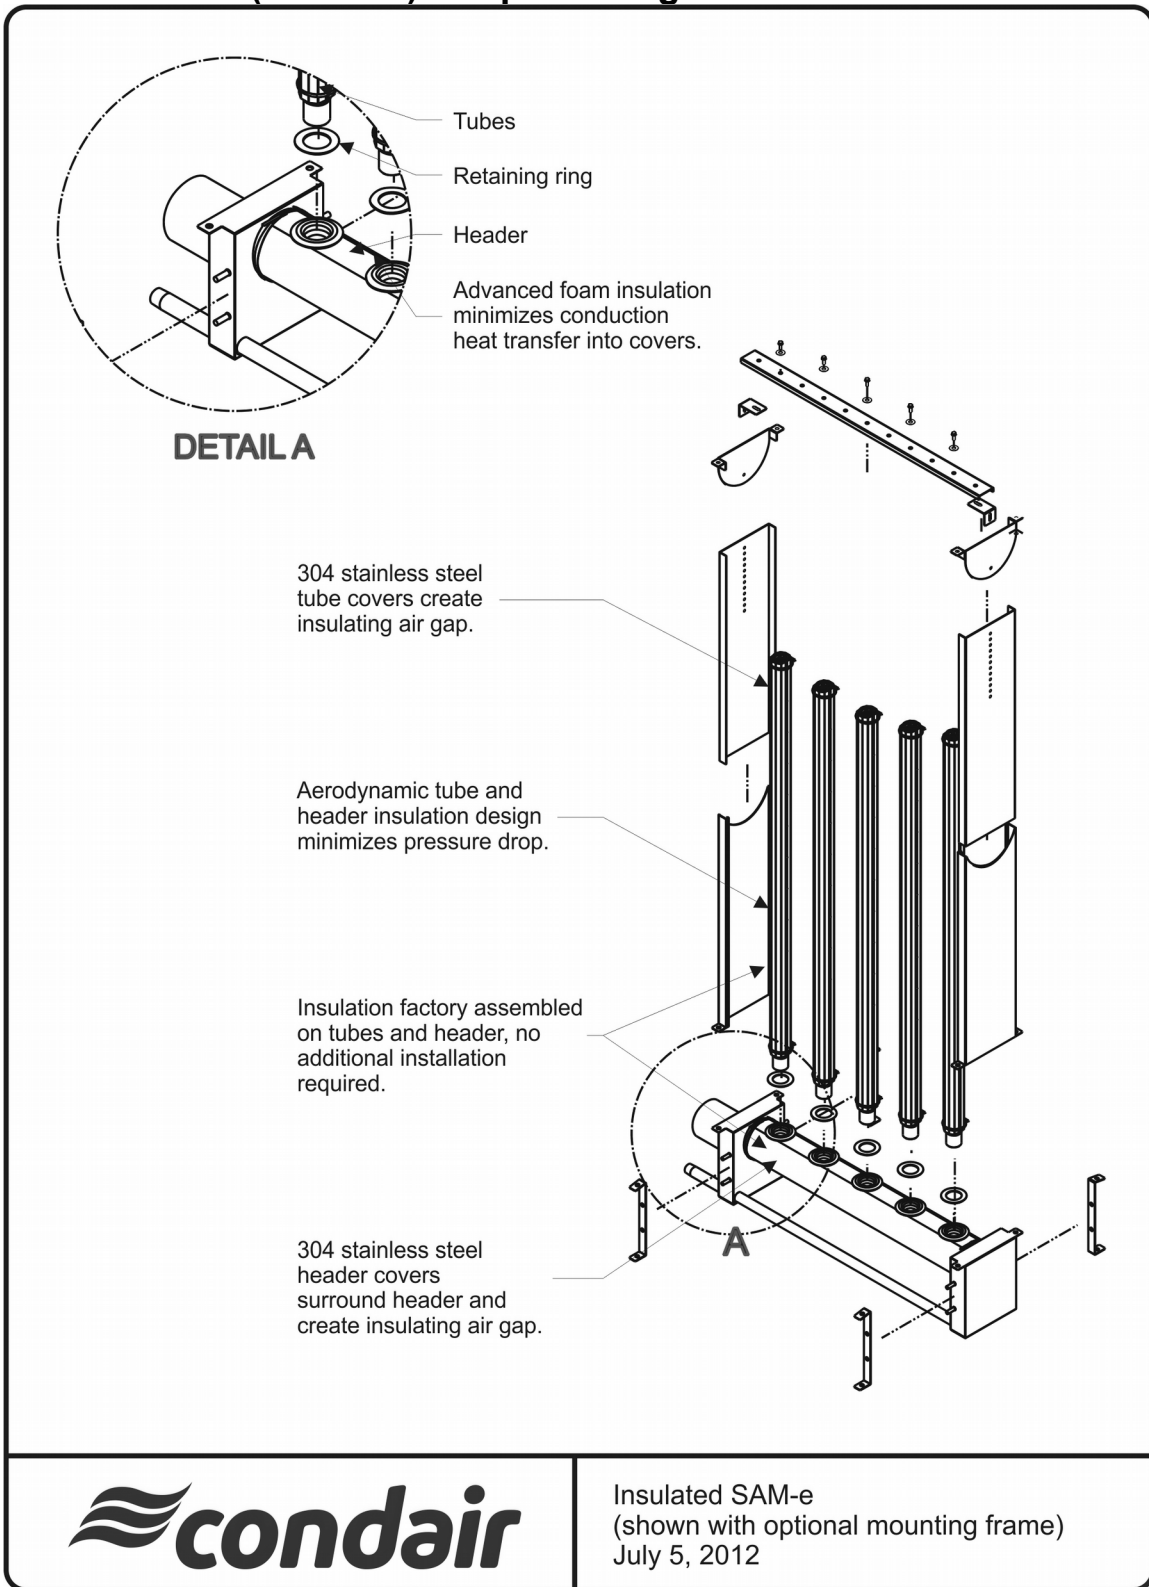

## **TERMS & CONDITIONS OF SALE**

### **PRICES:**

All prices are LIST price. All prices and discount factors are subject to change without notice.

### **ORDERS:**

All orders must be in writing (made out to Condair Inc. or Condair Ltd. hereinafter collectively referred to as Condair) or submitted through Help software, and are subject to acceptance by Condair's Credit Manager prior to production release and are contingent upon governmental regulations, availability of labor and materials, strikes, accidents, fires, and all other causes beyond the control of Condair.

### **SHIPPING TERMS:**

Shipping Terms: All packaged goods, (electric and gas-fired) humidifiers, SAM-e, Livesteam distribution systems, HP, ML and AirFog, are shipped FOB factory, standard ground freight included to the continental United States and Canada. Parts orders that are over \$1,000 net invoice value are shipped freight included. All air freight charges are extra. Export crating and export shipping costs are extra.

### **RISK OF LOSS & DAMAGE:**

Risk of loss or damage passes to the Buyer when the equipment described herein is delivered to the carrier. Any claim for goods lost or damaged in transit, shall be made by the Buyer against the carrier.

### **CHANGED OR CANCELLED ORDERS:**

- All changed or cancelled orders, in production or completed, are subject to a charge of 30%.
- Orders other than "Quick Ship Orders" for packaged products (e.g. electric, gas-fired) may generally be cancelled within 48 hours of being placed. Condair will make every effort to stop production of an order upon written notice of cancellation. If production has not started, Condair will waive the cancellation charge.
- Orders for equipment specially fabricated cannot be cancelled. E.g. SAM-e, LiveSteam, HP, ML, ME, and DL.
- Parts orders that are regular stock items are not subject to a cancellation charge. However, if a parts order is changed, which includes adding new parts to an order; this may cause a delay in delivery.

### **RETURNED GOODS:**

- Condair will accept unused equipment returned for credit only when prior approval has been given. Prior to returning goods a Return Material Authorization Number (RMA) must be obtained and it must be clearly marked on all returned goods. Goods received without an RMA will not be accepted and credit will not be issued. Any material accepted for return must be shipped back prepaid by the Buyer and must reach Condair without damage.
- An RMA will only be issued within 3-months of the equipment's shipping date.
- Any unused equipment accepted for return is subject to a 30% restocking charge.
- Equipment specially fabricated, cannot be returned. E.g. SAM-e, Livesteam, HP, ML, ME, and DL.
- Credit will only be issued to the original purchaser.
- Credit will be issued in the form of a credit note, which can be used towards a future purchase.

### **WARRANTY - UNITS:**

Condair warrants for a period of two years after installation or 30 months from the manufacturer's ship date, whichever is earlier, that Condair's manufactured and assembled products, not otherwise expressly warranted, are free from defects in material and workmanship. No warranty is made against corrosion, deterioration, or suitability of substituted materials used as a result of compliance with government regulations. Extended warranties are available for most Condair manufactured products at the time of initial product order.

Condair's obligations and liabilities under this warranty are limited to furnishing replacement parts to the customer, F.O.B. Condair's factory, providing the defective part(s) is returned freight prepaid by the Buyer. Parts used for repairs are warranted for the balance of the term of the warranty on the original humidifier or 90 days, whichever is longer.

The warranties set forth herein are in lieu of all other warranties expressed or implied by law. No liability whatsoever shall be attached to Condair until said products have been paid for in full and then said liability shall be limited to the original purchase price for the product. Any further warranty must be in writing, signed by an officer of Condair. In no event will Condair be liable for any incidental, special, indirect or consequential damages or for loss of profits, business or goodwill whether based in contract or in tort or other liability to provide indemnification or any other remedy. This limitation applies whether or not Condair has been advised or is aware of the possibility of such damages.

Condair's limited warranty on accessories, not of Condair's manufacture, such as controls, humidistats, pumps, etc. is limited to the warranty of the original equipment manufacturer from date of original shipment of the products to the Buyer.

Condair makes no warranty and assumes no liability unless the equipment is installed in strict accordance with a copy of the catalog and installation manual in effect at the date of purchase and by a contractor approved by Condair to install such equipment. Condair makes no warranty and assumes no liability whatsoever for consequential damage or damage resulting directly from misapplication, incorrect sizing or lack of proper maintenance of the equipment. Condair retains the right to change the design, specification and performance criteria of its products without notice or obligation.

Extended warranties for 1, 2, or 3 additional years can be purchased at time of order only through Help Software.

Parts or materials that are considered consumables, including but not limited to: cylinders, filters, nozzles, membranes, media, gaskets, O-rings, etc. are NOT covered by the warranty.

Condair makes no warranty and assumes no liability whatsoever for damage resulting from freezing of the humidifier, supply lines, drain lines, or quality of the water used.

#### **REPLACEMENT PARTS:**

- All requests for replacement parts, whether they are for warranty consideration or not, require a covering purchase order, prior to Condair releasing the goods. Goods will be shipped to the Buyer with an invoice.
- To obtain credit for parts covered by Condair's warranty, defective parts must be returned for inspection. To return parts the Buyer must request a Return Material Authorization (RMA) and it must be clearly marked on all returned parts. Parts returned without an RMA will not be accepted and credit will not be issued. All parts returned for credit must be shipped back prepaid by the Buyer.
- All parts must be returned within 3-months of an RMA being issued. Parts returned more than 3-months from when the RMA was issued will not be accepted.
- Credit for parts covered under warranty will be issued, if inspection indicates the returned parts are defective.

#### **PAYMENT:**

Terms of payment are net 30 days from date of invoice, unless otherwise specified. The offer of these terms is contingent upon approval by the Credit Manager at the time of receipt of the Buyer's official order. The Buyer agrees that interest on all overdue accounts may be charged monthly at a rate of 2.0% per month (24% per annum). Maintaining good credit will assist in meeting delivery. For quick ship orders, contact factory for pricing.