

Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.
P.O. Box 16620
Little Rock, AR 72231
Phone 501-834-3320
Fax 501-834-5416

Date: 10/18/2024

Return Request: 11/1/2024

Project: UAMS (CAMID)

Supplier: Middleton

Manufacturer: Various

Submittal: Air Duct Accessories

Submittal Number: 23 33 00-01

Drawing # and Installation: Mechanical Drawings

ARCHITECT

Clark Kenersen
2020 Baltimore Avenue, Suite 300
Kansas City, MO 64108
816-474-8237

ENGINEER

Clark Kenersen
2020 Baltimore Avenue, Suite 300
Kansas City, MO 64108
816-474-8237

GENERAL CONTRACTOR

CDI Contractors
3000 Cantrell Rd.
Little Rock, AR 72202
501-666-4300

MECHANICAL SUBCONTRACTOR

Comfort Systems USA (Arkansas), Inc.
9924 Landers Rd.
N. Little Rock, AR 72117
501-834-3320

Notes:

CSUSA PROJECT NO.

22-6069

sean@comfortar.com

9924 Landers Rd.
No. Little Rock, AR 72117


MIDDLETON, INC

P.O. BOX 506 BRYANT, AR 72089

TELEPHONE (501) 224-4888

LICENSE # 0225670422

Email: dsingleton@middletontinc.com



HVAC SUBMITTALS

10-17-24


PROJECT: UAMS Center for Animal Models of Infection & Disease
CONTRACTOR: Comfort Systems

PREPARED BY: David Singleton – **Middleton, Inc.**

CONTENTS

FURNISHED BY: **MIDDLETON, INC.**

Submittal Items 233300 – Ductwork Accessories

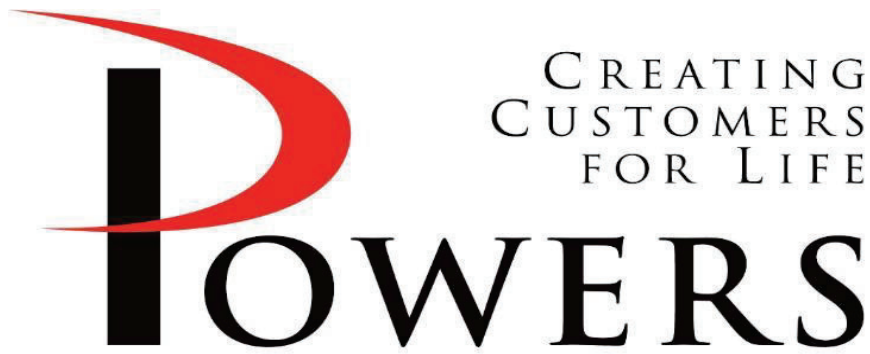


SUBMITTAL

PRODUCT	Takeoff Fittings & Round Balancing Dampers
MANUFACTURER	Dace
JOB NAME	UAMS Center for Animal Models of Infection & Disease
LOCATION	Little Rock, AR
ENGINEER	James R. Beecher
CONTRACTOR	Middleton Inc.
DATE	10/16/2024
SUBMITTED BY	Chris Atwood

5440 Northshore Drive - North Little Rock, Arkansas 72118 - Tel: 501.374.5420 Fax: 501.370.9298

HIGH EFFICIENCY SIDE TAKEOFF FITTINGS

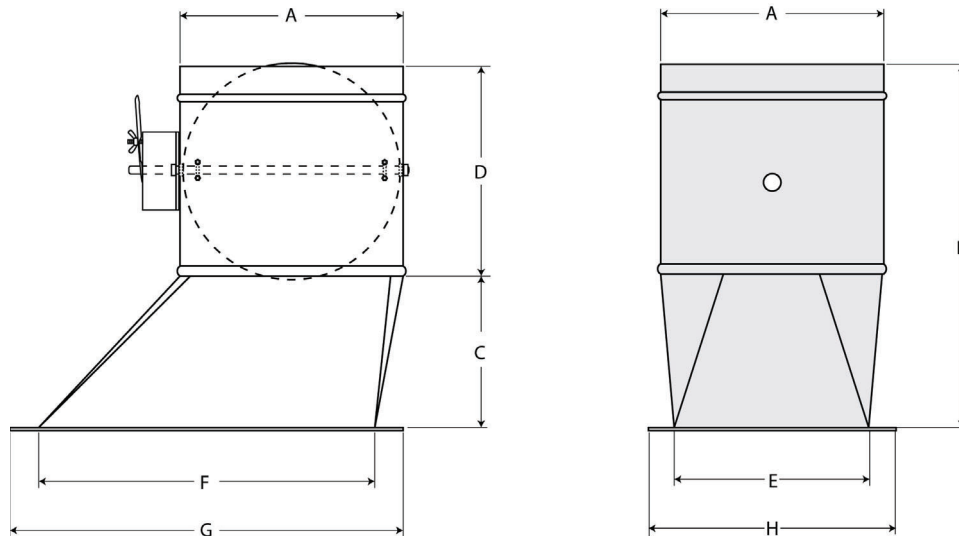

SIZE	A	B	C	D	E	F	G	H
5"	4 7/8	13	5 1/2	7 1/2	5	9	11	7
6"	5 7/8	13	5 1/2	7 1/2	5	9	11	7
7"	6 7/8	13	5 1/2	7 1/2	5	11	13	7
8"	7 7/8	13	5 1/2	7 1/2	6	12	14	8
9"	8 7/8	13	5 1/2	7 1/2	7	13	15	9
10"	9 7/8	13	5 1/2	7 1/2	8	14	16	10
12"	11 7/8	13	5 1/2	7 1/2	10	16	18	12
14"	13 7/8	13	5 1/2	7 1/2	12	18	20	14
16"	15 7/8	13	5 1/2	7 1/2	14	20	22	16
18"	17 7/8	13	5 1/2	7 1/2	16	22	24	18
20"	19 7/8	13	5 1/2	7 1/2	18	24	26	20

STANDARD CONSTRUCTION DETAILS

- 26 gauge G90/60 galvanized steel
- 1" flange with die formed corners & pre punched mounting holes
- entire unit is spot welded, SMACNA 3" WG minimum
- adhesive coated rubber perimeter gasket

OPTIONS IN CONSTRUCTION

- material 24 ga, 22 ga galvanized steel, S.Steel construction where located in S.S Duct
- all aluminum or all stainless steel
- optional damper—26—16 ga galvanized steel, aluminum, stainless steel
- CO3 damper control is a 2" raised locking quadrant, 3/8" sq. axle, nylon bearings fastened to the damper with U bolts.

Dace Mfg.

orders@dacemfg.co

SUBMITTAL

Feb 2015

ROUND MANUAL BALANCE DAMPER

MODEL: RMBD CO3

Purpose Description:

The round manual balancing damper is used to regulate air flow in pipe.

CONSTRUCTION:

BARREL: (B) 6" long, beaded & tapered.

ALL DIAMETERS: (A) sized 1/8" under nominal

BODY MATERIAL:

26 gauge standard

OPTIONS:

24 gauge steel

22 gauge steel

SS 304

DAMPER BLADES:

26 gauge standard

OPTIONS:

24 GA,

22 GA steel,

20 gauge—16 gauge steel


SS 304

S.Steel construction where located in S.S. Duct.



DAMPER CONTROL:


CO3 - 2" raised handle, locking quadrant, 3/8" square continuous rod, 'U' bolts, nylon bearings

All stainless steel option

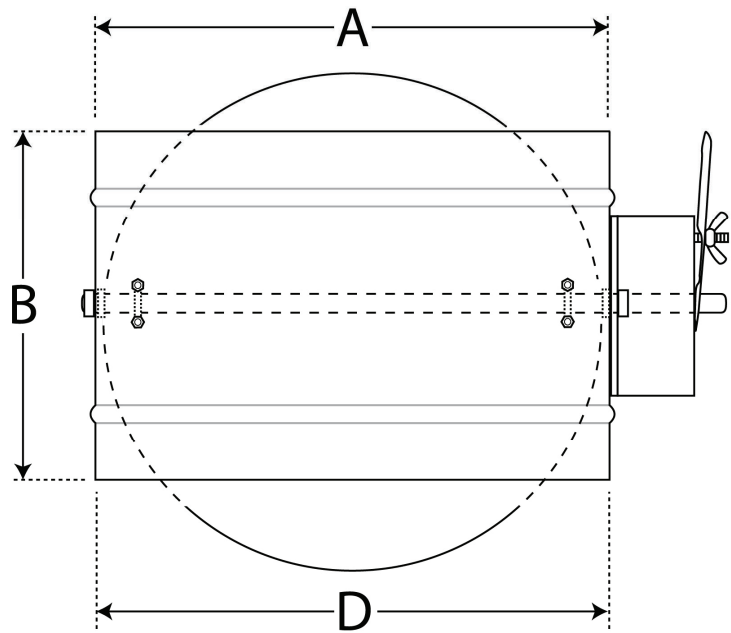

RMBD-CO3

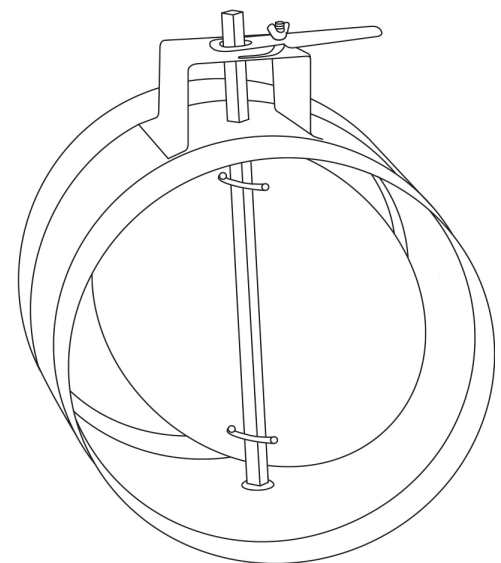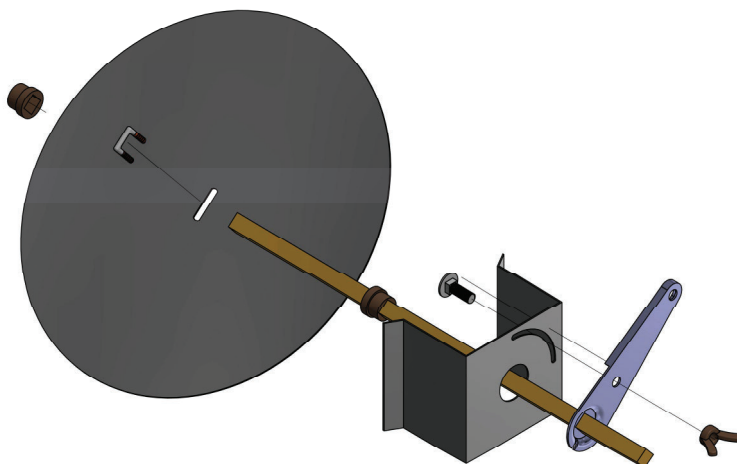

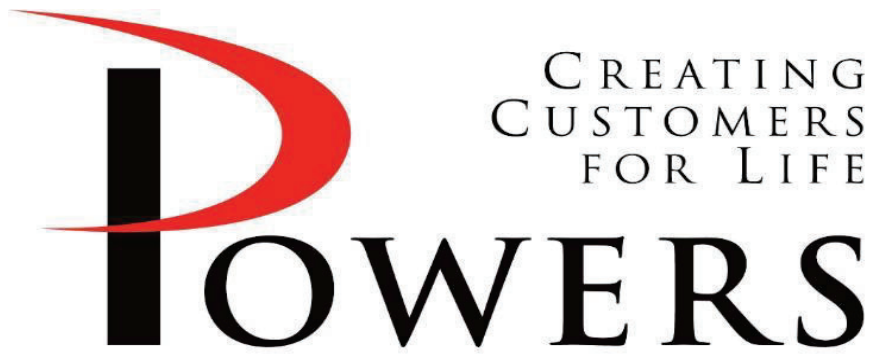

SUBMITTAL

PRODUCT	Fire Damper
MANUFACTURER	Pottorff
JOB NAME	UAMS Center for Animal Models of Infection & Disease
LOCATION	Little Rock, AR
ENGINEER	James R. Beecher
CONTRACTOR	Middleton Inc.
DATE	10/16/2024
SUBMITTED BY	Chris Atwood

5440 Northshore Drive - North Little Rock, Arkansas 72118 - Tel: 501.374.5420 Fax: 501.370.9298

Submittal

Model VFD-10D

Fire damper, 1-1/2 hour, dynamic rated, curtain blade

General construction

- Dimensions:** Nominal (approximately 1/4" (6) undersize)
- Material:** Galvanized steel
- Application mount:** Vertical
- Frame:** 20 gauge
- Blade style:** 24 gauge, curtain
- Fire closure device:** Fusible link
- Fire closure temperature (°F):** 165

Options


- Style:** B
- Sleeve:** Type: Integral sleeve; Length (in): 12; Gauge: 20; Clearance (in): 4.25
- Transition: Front:** Type: Round; Ship: Mounted
- Transition: Rear:** Type: Round; Ship: Mounted
- PI-10 blade indicator:** Configuration: One per ordered size; Ship: Mounted; Mount: External
- Angles:** Type: Picture frame, 20 ga (2 sides)

Ratings


- UL 555 fire resistance rating:** 1-1/2 hour (vertical and horizontal)
- UL HNLJ.V-5:** Ventilation Duct Assemblies
- Dynamic closure velocity (fpm):** 2000
- UL555S rated pressure (in.wg.):** 4

Listings

- UL 555 listing:** R11767
- CSFM listing:** 3225-0368:101

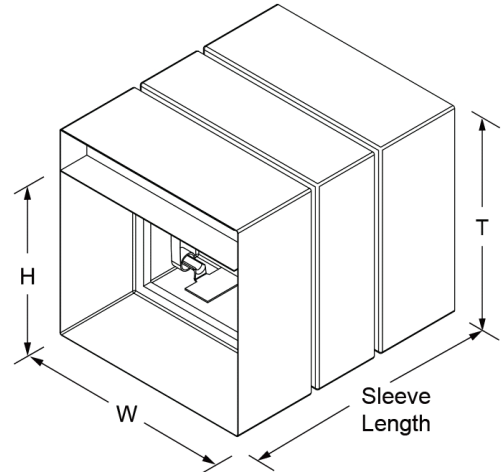

Model VFD-10D-B with integral sleeve



Round transition

Details

Line Item	Tag	Qty	Duct (in.xxxx)		Sections	Damper assembly (in.xxxx)
			W x H	D	Wide x High	W x T (in)
10	FIRE DAMPER	1	9 x 9	9	1 x 1	9 x 11

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

Application

The PI-10 indicator switch package employs a single pole and double throw micro switch to provide full closed blade indication on curtain style dampers from a remote location. The PI-10 indicator switch package can be factory installed directly to a damper frame, sleeve, or shipped loose for field mounting.


Ratings

15A/125 or 250 VAC
10A/24 VAC
1.5A/ 124 VDC



Maximum Temperature: -13°F to 176°F (-25°C to 80°C)


Wiring Diagram

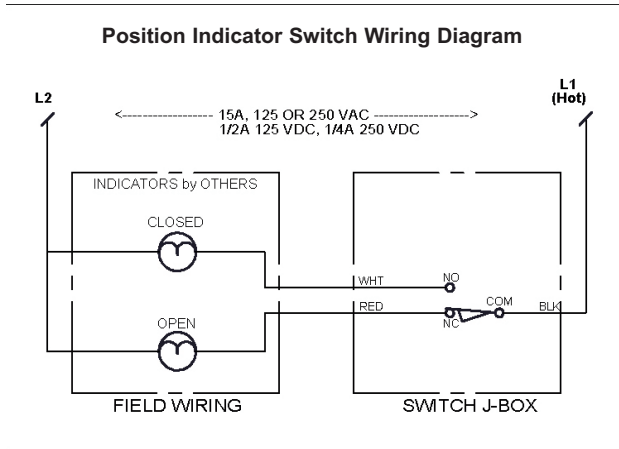


Verify continuity before final wiring.

Listings


UL 1054 listing: E12252

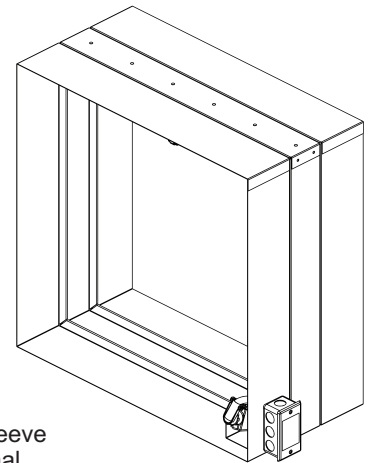


Model **PI-10** (sleeve option), external mount wiring box




PI-10 Ship Loose - Internal Mount

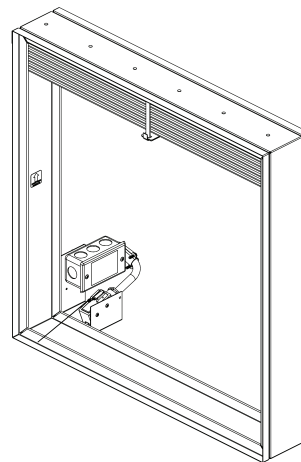


Model **PI-10** (no sleeve)

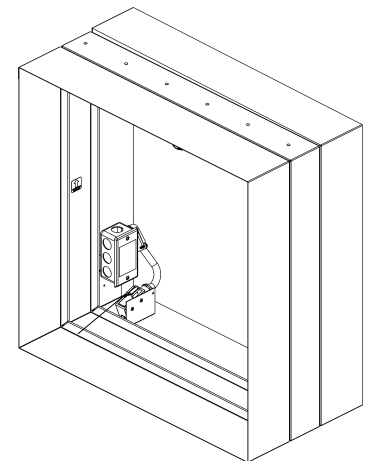

Model **PI-10** (sleeve option), internal mount wiring box



PI-10 Ship Loose - External Mount

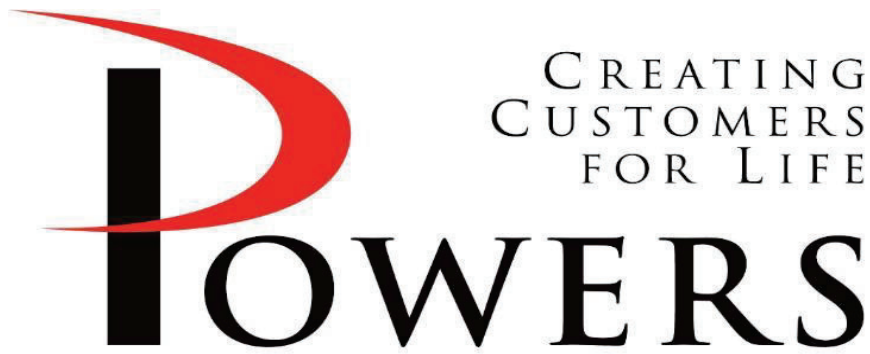

SUBMITTAL

PRODUCT	Fire Smoke Dampers
MANUFACTURER	Pottorff
JOB NAME	UAMS Center for Animal Models of Infection & Disease
LOCATION	Little Rock, AR
ENGINEER	James R. Beecher
CONTRACTOR	Middleton Inc.
DATE	10/16/2024
SUBMITTED BY	Chris Atwood

5440 Northshore Drive - North Little Rock, Arkansas 72118 - Tel: 501.374.5420 Fax: 501.370.9298


Submittal

Model FSD-141

Combination fire smoke damper, 1-1/2 hour, UL class 1, triple-V blade

General construction

- Dimensions:** Nominal (approximately 1/4" (6) undersize, sleeve thickness not included)
- Material:** Galvanized steel
- Mount:** Vertical
- Frame:** 5" x 1" (127x25) hat channel, 13 gauge equivalent
- Blade style:** 6" x 16 gauge, triple-v
- Blade action:** Parallel
- Sleeve:** Type: Sleeve
- Axles:** 1/2" (13) diameter plated steel hex
- Linkage:** Concealed in frame
- Bearings:** Stainless steel oilite, sleeve-type
- Seals:** Blade: Silicone; Jamb: Flexible stainless steel
- Fire closure device:** HS-10
- Fire closure temperature (°F):** Primary: 165

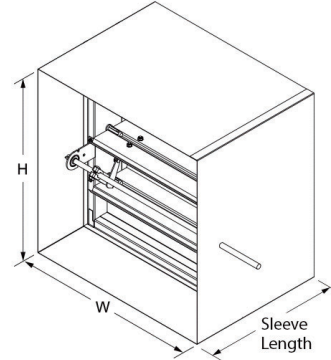

Options

- Angles:** Type: Picture frame, 20 ga (2 sides)
- PI-50 blade indicator:** Configuration: One per actuator

Ratings

- UL 555 fire resistance rating:** 1-1/2 hour
- UL 555S leakage class:** 1 [8 cfm/sq.ft. @ 4 in.wg.] [(0.04m³/s/ m²@1.0 kPa)]
- UL HNLJ.V-5:** Ventilation Duct Assemblies
- Dynamic closure velocity (fpm):** 2000
- UL555S rated pressure (in.wg.):** 4
- Application temperature (°F):** 250

Listings

- UL 555 and 555S listing:** R11767
- CSFM listing:** 3225-0368:110 and 3230-0368:111



Model FSD-141 with sleeve



Air Performance

Pottorff certifies that the model FSD-141 shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings only.

Details

Line item	Tag	Qty	Dimensions (in.xxxx)		Sections	Sleeve or Side Plate			Actuator							
			W x H	D		Wide x High	L (in)	Gauge	Clr (in)	Qty	Model	Volt	Pos	Orien	Loc	Power consumption (per actuator)
1	FIRE SMOKE DAMPER	1	14 x 8		1 x 1	16	20	6	1	FSTF120	120V	PO	Perp	Ext/int	3.5VA	3.5
2	FIRE SMOKE DAMPER	1	12 x 8		1 x 1	16	20	6	1	FSTF120	120V	PO	Perp	Ext/int	3.5VA	3.5
3	FIRE SMOKE DAMPER	1	14 x 12		1 x 1	16	20	6	1	FSTF120	120V	PO	Perp	Ext/int	3.5VA	3.5
4	FIRE SMOKE DAMPER	1	22 x 18		1 x 1	16	20	6	1	FSNF120V	120V	PO	Perp	Ext/int	23VA	27
5	FIRE SMOKE DAMPER	1	60 x 30		2 x 1	16	20	6	1	FSNF120H	120V	PO	Perp	Ext/int	23VA	27

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.



Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.


Submittal

Model FSD-141

Actuator and Sleeve Interference Details

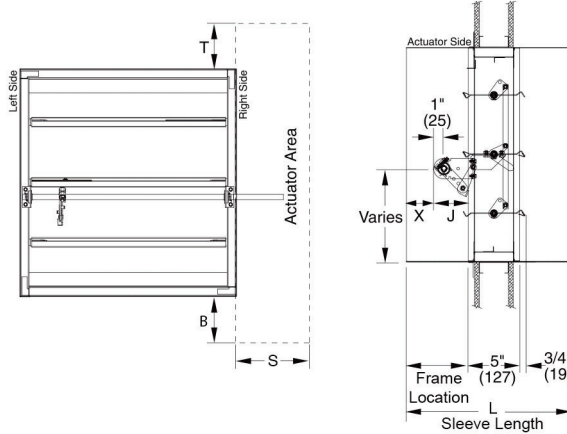

Detail #11-1



Detail #21-1

Model FSD-141

The drawings and corresponding table illustrate the position of the damper when mounted in a factory sleeve and the relative space required for a given actuator. The standard mounting locations provide enough space for installation of retaining angles and duct connections.

Dimensional Data

Line item	Tag	Qty	Dimensions (in.xxxx)		Sections Wide x High	Sleeve or Side Plate		Actuator			Dimensional data (in)				
			W x H	D		L (in)	Clr (in)	Qty	Model	Detail	F	T	S	X	J
1	FIRE SMOKE DAMPER	1	14 x 8		1 x 1	16	6	1	FSTF120	#11-1	4	1	4.5	2.625	3.375
2	FIRE SMOKE DAMPER	1	12 x 8		1 x 1	16	6	1	FSTF120	#11-1	4	1	4.5	2.625	3.375
3	FIRE SMOKE DAMPER	1	14 x 12		1 x 1	16	6	1	FSTF120	#11-1	0	2	4.5	2.625	3.375
4	FIRE SMOKE DAMPER	1	22 x 18		1 x 1	16	6	1	FSTF120V	#11-1	0	1	4.5	2.625	3.375
5	FIRE SMOKE DAMPER	1	60 x 30		2 x 1	16	6	1	FSTF120H	#21-1	0	0	4.5	2.625	3.375

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.


Submittal

Model FSD-141

Combination fire smoke damper, 1-1/2 hour, UL class 1, triple-V blade

General construction

- Dimensions:** Nominal (approximately 1/4" (6) undersize, sleeve thickness not included)
- Material:** Galvanized steel
- Mount:** Vertical
- Frame:** 5" x 1" (127x25) hat channel, 13 gauge equivalent
- Blade style:** 6" x 16 gauge, triple-v
- Blade action:** Parallel
- Sleeve:** Type: Sleeve
- Axles:** 1/2" (13) diameter plated steel hex
- Linkage:** Concealed in frame
- Bearings:** Stainless steel oilite, sleeve-type
- Seals:** Blade: Silicone; Jamb: Flexible stainless steel
- Fire closure device:** HS-10
- Fire closure temperature (°F):** Primary: 165

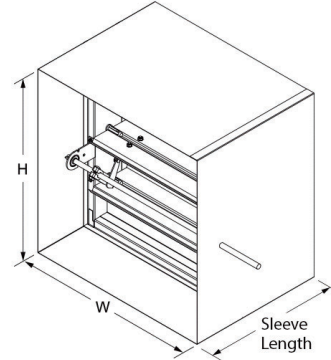

Options

- Angles:** Type: Picture frame, 20 ga (2 sides)
- PI-50 blade indicator:** Configuration: One per actuator; Wiring: Separate connections

Ratings

- UL 555 fire resistance rating:** 1-1/2 hour
- UL 555S leakage class:** 1 [8 cfm/sq.ft. @ 4 in.wg.] [(0.04m³/s/m²@1.0 kPa)]
- UL HNLJ.V-5:** Ventilation Duct Assemblies
- Dynamic closure velocity (fpm):** 2000
- UL555S rated pressure (in.wg.):** 4
- Application temperature (°F):** 250

Listings

- UL 555 and 555S listing:** R11767
- CSFM listing:** 3225-0368:110 and 3230-0368:111



Model FSD-141 with sleeve



Air Performance

Pottorff certifies that the model FSD-141 shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings only.

Details

Line item	Tag	Qty	Dimensions (in.xxxx)		Sections	Sleeve or Side Plate			Actuator							
			W x H	D		Wide x High	L (in)	Gauge	Clr (in)	Qty	Model	Volt	Pos	Orien	Loc	Power consumption (per actuator)
6	FIRE SMOKE DAMPER	1	80 x 24		3 x 1	16	20	6	2	FSNF120L	120V	PO	Perp	Ext/int	23VA	27

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.


Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

Submittal

Model FSD-141

Actuator and Sleeve Interference Details

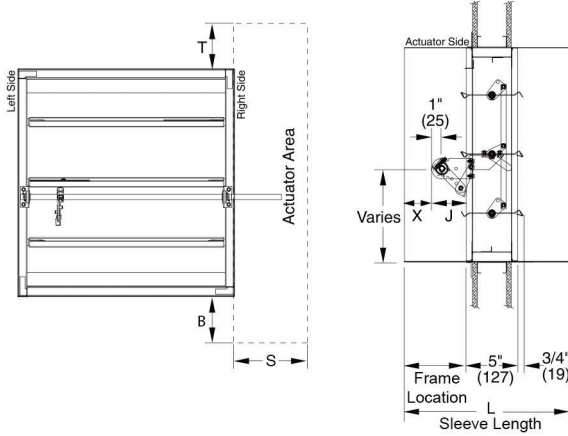

Detail #31-2

Model FSD-141

The drawings and corresponding table illustrate the position of the damper when mounted in a factory sleeve and the relative space required for a given actuator. The standard mounting locations provide enough space for installation of retaining angles and duct connections.

Dimensional Data

Line item	Tag	Qty	Dimensions (in.xxxx)			Sections Wide x High	Sleeve or Side Plate		Actuator			Dimensional data (in)				
			W x H	D			L (in)	Clr (in)	Qty	Model	Detail	F	T	S	X	J
6	FIRE SMOKE DAMPER	1	80 x 24			3 x 1	16	6	2	FSNF120L	#31-2	0	0	4.5	2.625	3.375

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

Submittal

Model FSD-141

Combination fire smoke damper, 1-1/2 hour, UL class 1, triple-V blade

General construction

Dimensions: Nominal (approximately 1/4" (6) undersize, sleeve thickness not included)

Material: Galvanized steel

Mount: Vertical

Frame: 5" x 1" (127x25) hat channel, 13 gauge equivalent

Blade style: 6" x 16 gauge, triple-v

Blade action: Parallel

Sleeve: Type: Sleeve

Axles: 1/2" (13) diameter plated steel hex


Linkage: Concealed in frame

Bearings: Stainless steel oilite, sleeve-type

Seals: Blade: Silicone; Jamb: Flexible stainless steel

Fire closure device: HS-10

Fire closure temperature (°F): Primary: 165

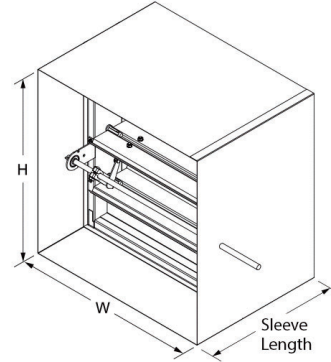

Model FSD-141 with sleeve

Options

Transition: Jackshaft side: Type: Round; Ship: Mounted

Transition: Non jackshaft side: Type: Round; Ship: Mounted

Angles: Type: Picture frame, 20 ga (2 sides)

PI-50 blade indicator: Configuration: One per actuator

Ratings

UL 555 fire resistance rating: 1-1/2 hour

UL 555S leakage class: 1 [8 cfm/sq.ft. @ 4 in.wg.] [(0.04m³/s/ m²@1.0 kPa)]

UL HNLJ.V-5: Ventilation Duct Assemblies

Dynamic closure velocity (fpm): 2000


UL555S rated pressure (in.wg.): 4

Application temperature (°F): 250

Listings

UL 555 and 555S listing: R11767

CSFM listing: 3225-0368:110 and 3230-0368:111



Round transition (both sides)



Air Performance

Pottorff certifies that the model FSD-141 shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings only.

Details

Line item	Tag	Qty	Dimensions (in.xxxx)		Sections	Sleeve or Side Plate			Actuator							
			W x H	D		Wide x High	L (in)	Gauge	Clr (in)	Qty	Model	Volt	Pos	Orien	Loc	Power consumption (per actuator)
7	FSD ROUND	1	8 x 8	8	1 x 1	16	20	6	1	FSTF120	120V	PO	Perp	Ext/int	3.5VA	3.5
8	FSD ROUND	2	12 x 12	12	1 x 1	16	20	6	1	FSTF120	120V	PO	Perp	Ext/int	3.5VA	3.5
9	FSD ROUND	1	22 x 22	22	1 x 1	16	20	6	1	FSNF120V	120V	PO	Perp	Ext/int	23VA	27
19	FSD ROUND	1	6 x 6	5	1 x 1	16	20	6	1	FSTF120	120V	PO	Perp	Ext/int	3.5VA	3.5

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.


Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

Submittal

Model FSD-141

Actuator and Sleeve Interference Details

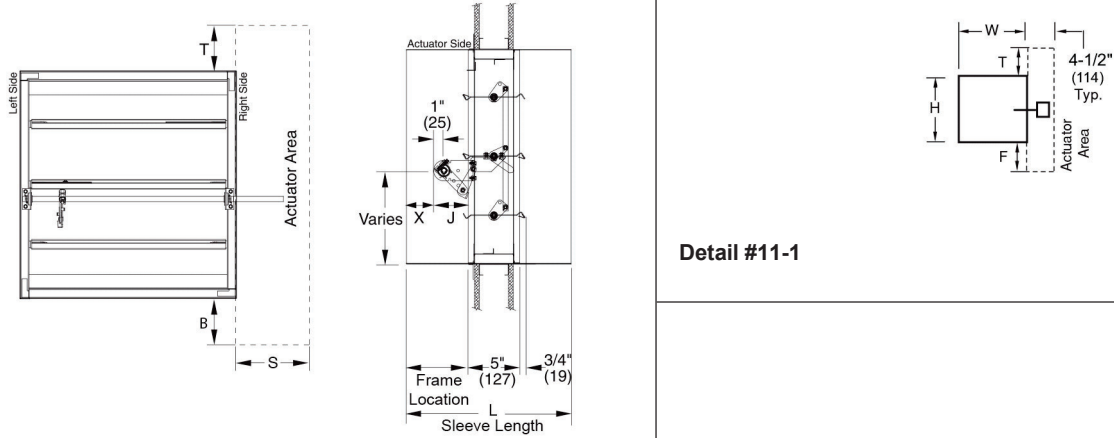

Detail #11-1

Model FSD-141

The drawings and corresponding table illustrate the position of the damper when mounted in a factory sleeve and the relative space required for a given actuator. The standard mounting locations provide enough space for installation of retaining angles and duct connections.

Dimensional Data

Line item	Tag	Qty	Dimensions (in.xxxx)			Sections Wide x High	Sleeve or Side Plate		Actuator			Dimensional data (in)				
			W x H	D			L (in)	Clr (in)	Qty	Model	Detail	F	T	S	X	J
7	FSD ROUND	1	8 x 8	8		1 x 1	16	6	1	FSTF120	#11-1	4	1	4.5	2.625	3.375
8	FSD ROUND	2	12 x 12	12		1 x 1	16	6	1	FSTF120	#11-1	0	2	4.5	2.625	3.375
9	FSD ROUND	1	22 x 22	22		1 x 1	16	6	1	FSNF120V	#11-1	0	0	4.5	2.625	3.375
19	FSD ROUND	1	6 x 6	5		1 x 1	16	6	1	FSTF120	#11-1	5	3	4.5	4	2

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.


Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

Submittal Model FSD-141 Performance


Pressure drop testing

Pressure drop testing was performed in accordance with AMCA Standard 500-D using the three configurations shown. All data has been corrected to represent air density of 0.075 lb/ft. Actual pressure drop in any ducted HVAC system is a combination of many elements. This information, along with analysis of other system influences, should be used to estimate actual pressure losses for a damper installed in a given HVAC system.

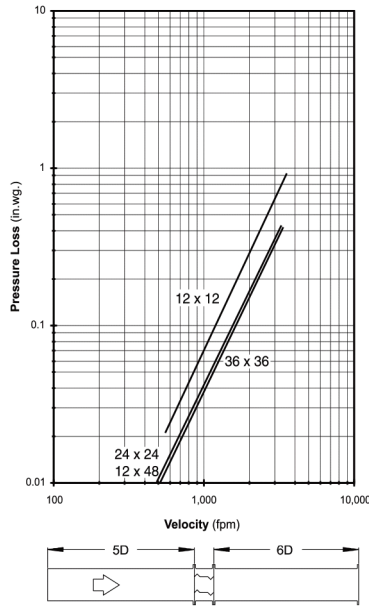


Ducted inlet and outlet

AMCA Figure 5.3 illustrates a fully ducted damper. This configuration represents the lowest pressure drop of the three test configurations because entrance and exit losses are minimized by straight duct runs upstream and downstream of the damper.

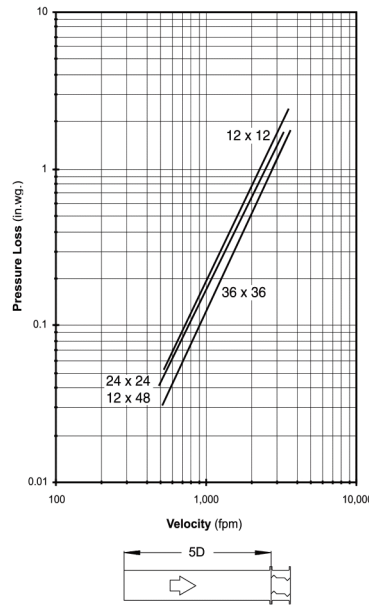

Ducted inlet

AMCA Figure 5.2 illustrates a ducted damper exhausting air into an open area. This configuration has a lower pressure drop than Figure 5.5 because entrance losses are minimized by a straight duct run upstream of the damper.

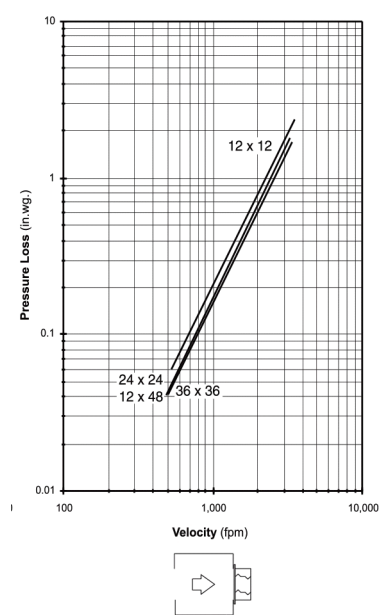

Plenum mount

AMCA Figure 5.5 illustrates a plenum mounted damper. This configuration has the highest pressure drop because of extremely high entrance and exit losses due to the sudden changes of area in the system.



Air Performance

Pottorff certifies that the model FSD141 shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings only.

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

Application


The HS-10 fire closure device employs a one-temperature, manually resettable, electric thermostat sensor to interrupt the electrical power to actuators used on fire/smoke dampers to permit the controlled closure of the dampers. The HS-10 is designed to replace the fusible link. The HS-10 allows for damper testing per all NFPA specifications. The damper will close once power is removed from the HS-10 and will automatically reopen once power is restored.

Wiring Diagram

Control Switch Function

Normal

Hot

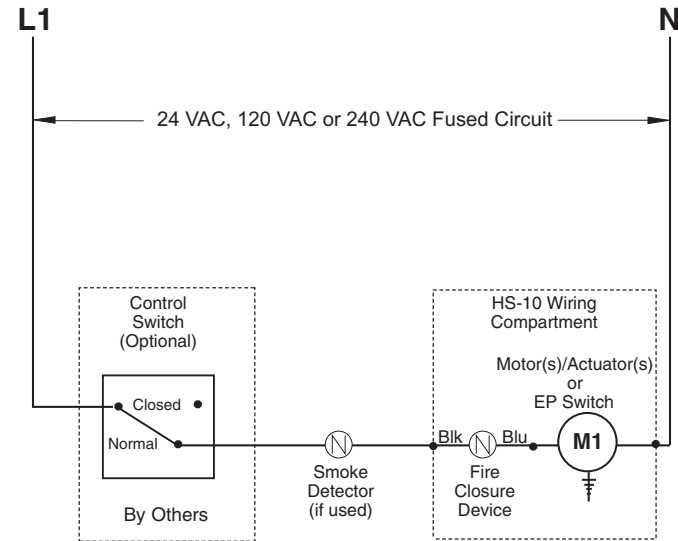

The damper remains open except in either of the following situations:

- 1 - The smoke detector cuts the power to the "Power-Open" motor/actuator.
- 2 - An elevated duct temperature causes the fire closure device to cut power to the "Power-Open" motor/operator.
The damper will remain closed until the duct temperature has returned to a safe level. At that point the fire closure device can be manually reset, allowing the damper to be reopened.

Closed

The damper closes and remains closed regardless of any sensor signal.

Listings



UL 555 listing: R11767

CSFM listing: 3225-0368:110, 3225-0368:111, 3225-0368:112, 3225-0368:113, 3225-0368:115, and 3225-0368:116.

New York City MEA listing: 295-98-E


Meets NFPA Standards: 80, 90A, 92A, 92B, 101, and 105

Meets Building Code Standards: IBC, NBC, NFPA, SBC and UBC

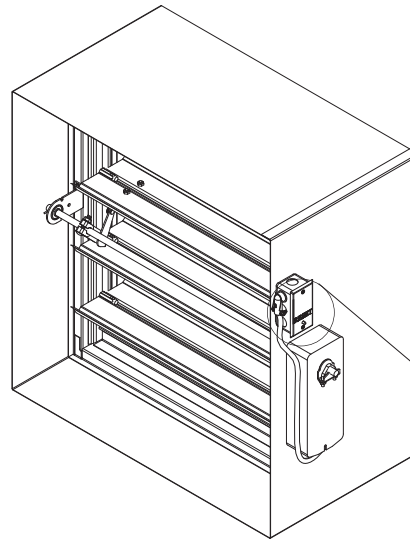

Model **HS-10** external


Model **HS-10** internal

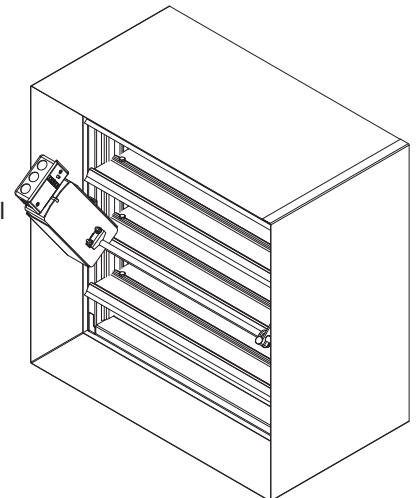

Application

The PI-50 indicator switch package employs an in-jamb assembly plate consisting of two single pole, double throw micro switches to provide full open and full closed blade indication from a remote location. The PI-50 indicator switch package is factory installed directly to a damper blade.

Wiring Diagram

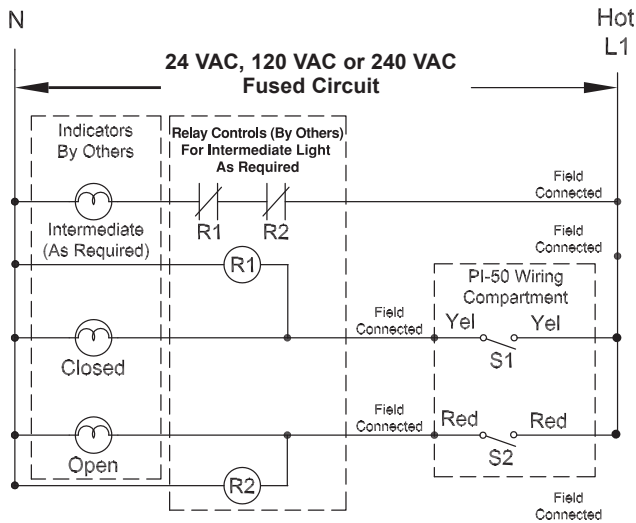

Verify continuity before final wiring.

S1 & S2 - Damper position indicator switches.

S1 - Closes when damper is closed.

S2 - Closes when damper is open.

R1 - Relay control for intermediate position indication.

R2 - Relay control for intermediate position indication.

Ratings

125/250 VAC, 12A

250 VAC, 1/3HP; 125 VAC, 1/6HP

250 VDC, 1/4A; 125 VDC, 1/2A

Max. ambient temp. 257°F (125°C)

Listings


UL 555 listing: R11767

CSFM listing: 3225-0368:110, 3225-0368:111,
3225-0368:112, 3225-0368:113,
3225-0368:115, and 3225-0368:116.


New York City MEA listing: 295-98-E

Meets NFPA Standards: 90A, 92A, 92B and 101


Meets Building Code Standards: IBC, NBC, NFPA, SBC and UBC

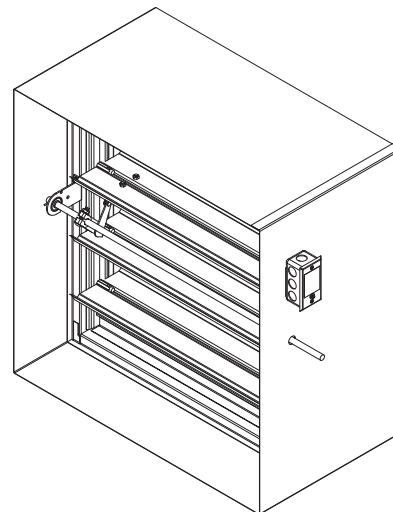


Model **PI-50** (sleeve option), external mount wiring box

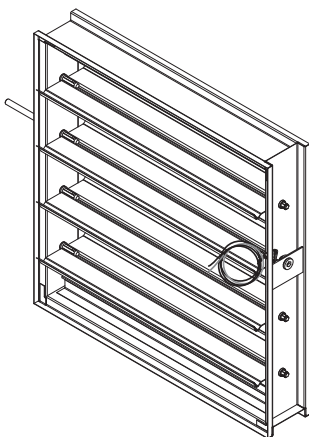

Model **PI-50** (no sleeve)

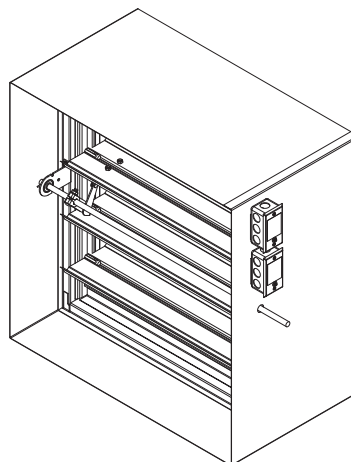

Model **PI-50** (sleeve and two per ordered size option), external mount wiring box (internal mount wiring box available)

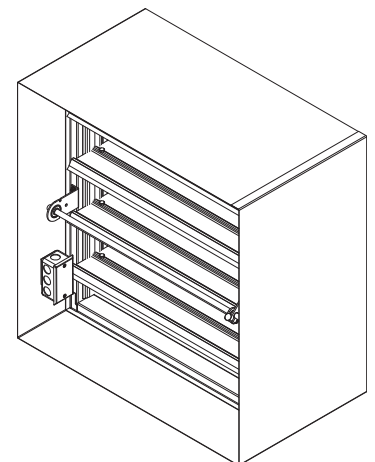

Model **PI-50** (sleeve option), internal mount wiring box



Technical Data		FSNF24(-S)(-FC) US, FSNF120(-S)(-FC) US
Power supply	FSNF24(-S)(-FC) US	24 VAC ± 20%, 50/60 Hz
	FSNF120(-S)(-FC) US	120 VAC ± 10%, 50/60 Hz
Power consumption	running	17 W, 24 VA
	24 VAC holding	4 W, 6.5 VA
	120 VAC running	19 W, 23 VA, 0.19 A
	120 VAC holding	6 W, 8.5 VA, 0.07 A
Fusing*	FSNF24	2.5 amp slow blow
	FSNF120	0.5 amp slow blow
Transformer sizing		40 VA per 24 VAC actuator
Electrical connection	FSNF24 US	3 ft, 18 ga, 2 color coded leads
	FSNF120 US	3 ft, 18 ga, 3 color coded leads
	FSNF...-S US	3 ft, 18 ga, appliance cable
Overload protection		electronic throughout 0 to 95° rotation grounded enclosure, 120V
Control		microprocessor
Angle of rotation		95°
Torque		70 in-lb [7.9 Nm] minimum from 32°F to 350°F [0°C to 177°C]
Direction of rotation	spring	can be selected by CCW/CW mounting
Position indication		visual indicator, 0° to 95°
Running time		between 32°F and 350°F [0°C to 177°C] <15 seconds at rated voltage and torque
Humidity		5 to 95% RH non-condensing
Ambient temperature		32°F to 122°F [0°C to 50°C]
Storage temperature		-40°F to 176°F [-40°C to 80°C]
Housing		NEMA type 1
Housing material		zinc coated steel
Gears		steel, permanently lubricated
Agency listings		cULus listed to UL873 and CAN/CSA C22.2 No. 24 NYC Department of Buildings Materials and Equipment Acceptance Division MEA 197-07-M California State Fire Marshal Listing 3210-1593:101
Servicing		maintenance free
Quality standard		ISO 9001
Weight	FSNF24(-S) US	6.0 lbs [2.75 kg], (+ 0.5 lbs [+ .23 kg])
	FSNF120(-S) US	6.7 lbs [3.0 kg], (+ 0.5 lbs [+ .23 kg])

FSNF24-S US, FSNF120-S US, FSNF24-S-FC, FSNF120-S-FC	
Auxiliary switch	2xSPST 7A resistive, 2.5A inductive at 120V or 250V, UL Approved, double-insulated, one switch at 10°, one at 85°

Application

The type FSNF spring-return actuator is intended for the operation of smoke and combination fire and smoke dampers in ventilation and air-conditioning systems. The actuator will meet requirements of UL555 and UL555S when tested as an assembly with the damper and will open and close in 15 seconds at 350°F. Square footage of damper operated will depend on make and model of damper and the temperature 250°F or 350°F.

Operation

Mounting of the actuator to the damper axle shaft or jackshaft (3/8" to 1.05") is via a cold-weld clamp. Teeth in the clamp and V-bolt dig into the metal of both solid and hollow shafts maintaining a perfect connection. The specially designed clamp will not crush hollow shafts. The bottom end of the actuator is held by an anti-rotation strap or by a stud provided by the damper manufacturer.

The actuator is mounted in its fail safe position with the damper blade(s) closed. Upon applying power, the actuator drives the damper to the open position. The internal spring is tensioned at the same time. If the power supply is interrupted, the spring moves the damper back to its fail-safe position.

-FC Models have the same electrical and mechanical characteristics except instead of a 1/2" conduit connector a 3/8" screw flex connector is supplied.


SAFETY NOTES

The actuator contains no components which the user can replace or repair.

1/2" Threaded Connector – Screw a conduit fitting into the actuator's metal bushing. Jacket the actuator's input wiring with suitable flexible conduit. Properly terminate the conduit in a suitable junction box.

3/8" Flexible Connector Models (-FC Screw Connector) – Mount the flexible conduit into the actuator's metal bushing by means of the provided screw with a torque of 0.9 ft-lb. Jacket the actuator's input wiring with suitable flexible conduit. Properly terminate the conduit in a suitable junction box.

Dimensions (Inches [mm])

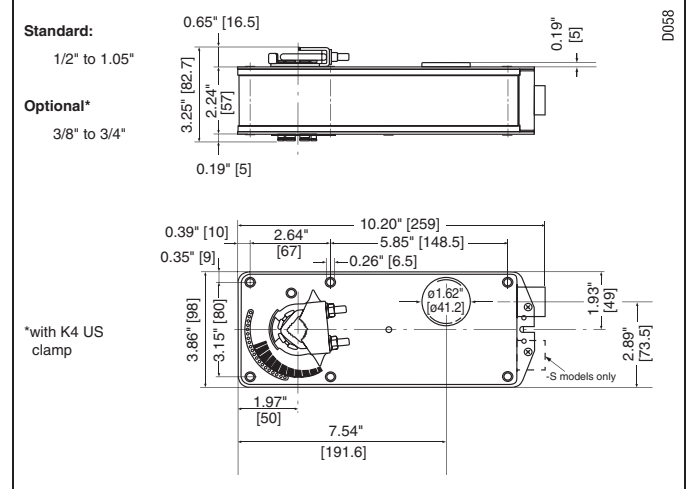

Accessories

All AF/NF linkages and parts except ZG-102 may be employed.

*** Individual Fusing or Breakers are not required by Belimo.**

The FSNF24 draws higher peak current when driving against any type of stop. Given the technology of fuses & breakers, this requires the value of fuse or breaker to be increased to avoid nuisance opening or tripping. A 2.5 amp slow blow should be used for 24VAC. A 0.5 amp slow blow should be used for 120VAC.

Transformers

Note that while a 100VA transformer would handle 2 actuators, a 4A breaker is insufficient.

FSNF24(-S)(-FC) US, FSNF120(-S)(-FC) US

On/Off, Spring Return, 350°F for Half Hour, 15 Seconds Cycle Time




Typical Applications

Multi-section Damper Assemblies

The typical fire and smoke damper requires from 5-15 in-lb of torque per square foot at 250°F – 350°F under dynamic load (2400 fpm velocity). The FSNF will operate multi-section dampers using multiple actuators for multiple sections. Some of the methods used are shown below.

This is a direct coupled actuator. If linkages are needed use those for the FSAF series. Do not use the ZG-102 as close coupled actuators have a shortened life due to the high speed of the FSNF. Mounting at opposite ends of a jackshaft is OK.

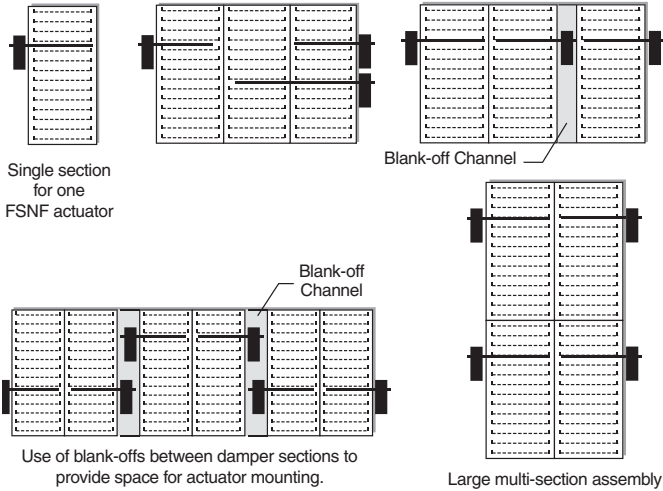

Typical Specification

Smoke Control and Combination Fire and Smoke Control Damper Actuators

All smoke and combination fire and smoke dampers shall be provided with Belimo FSTF, FSLF, FSNF, or FSAF actuators. No substitutions allowed.

Damper and actuator shall have UL555S Listing for 250°F (350°F) and shall comply with UBC if required by local codes.

Where proof of closure switches are required, blade switches, actuator auxiliary switches, or proximity switches are allowed if permitted by local codes.

Replacement Applications

The number one "equal or better" requirement for use as a replacement for obsolete defective motors is the UL555S listing of the Belimo actuator with the damper for the application. The local authority having jurisdiction sets the requirements. In some cases a permit and inspection may be required.

Go to www.belimo.us/firesmoke for a Cross Reference from old damper actuators to Belimo. Extensive retrofit installation instructions are available, along with technical training information.

CAUTION

Caution must be used when replacing failed motors with new Belimo actuators. Many old motors did not have internal springs and depended on external springs on the side of the damper or wrapped around the damper shaft to close the damper. Old motor springs must be removed or disabled. Do not remove fusible link springs if they had only fire and no smoke functions

In some cases, a BAE 165 or equal thermal sensor must be installed.



Wiring Diagrams

INSTALLATION NOTES


- 1 Provide overload protection and disconnect as required.
- 2 **CAUTION Equipment Damage!**
Actuators may be connected in parallel. Power consumption and input impedance must be observed.
- 4 For end position indication, interlock control, fan startup, etc., FSNF24-S US and FSNF120-S US incorporate two built-in auxiliary switches:
2 x SPDT, 7A (2.5A inductive)@125/250 VAC, UL Approved, 10° and 85°.
Switch rating is for 250°F 1/2 hour only.

WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

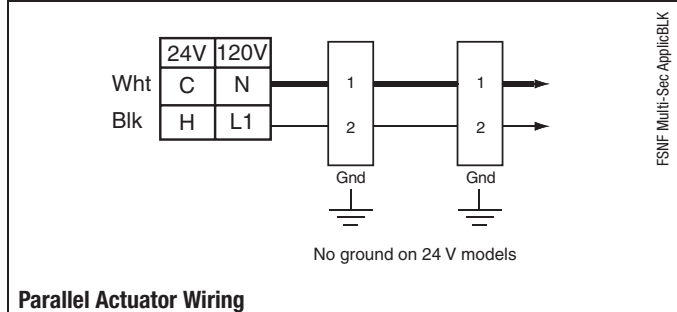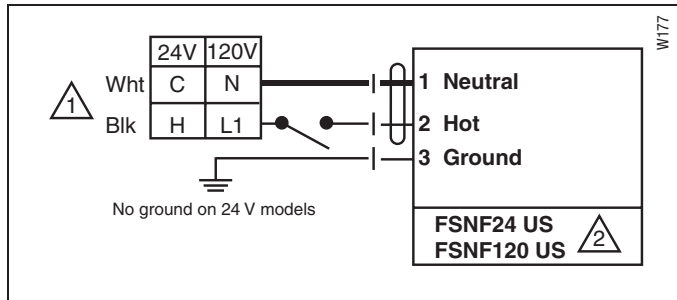

Parallel Actuator Wiring

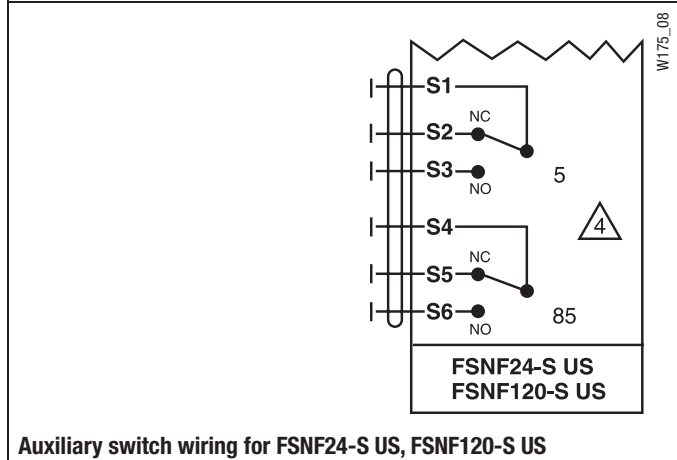

Auxiliary switch wiring for FSNF24-S US, FSNF120-S US

Subject to change. © Belimo Aircontrols (USA), Inc.



Technical Data		FSTF120(-S) US
Power supply	nominal	120 VAC, 60 Hz
	tolerance	108 to 132 VAC, 60 Hz
Power consumption	running	2 W, 3.5 VA
	holding	1.5 W, 2.5 VA
max. inrush current		2.1A
Electrical connection (-S models have 2 cables)		3 ft, 18 GA appliance cable
		1/2" conduit connector
Overload protection		electronic throughout 0 to 95° rotation
Electrical protection		actuators are double insulated
Angle of rotation		max 95°, adjust. with mechanical stop
Torque		min. 18 in-lb [2 Nm]
Direction of rotation		reversible with cw/ccw mounting
Position indication		visual indicator, 0° to 95° (0° spring return position)
Running time	motor	< 75 sec (0 to 18 in-lb)
	spring	< 25 sec @32°F to 122°F [0°C to 50°C]
Humidity		5 to 95% RH non-condensing
Ambient temperature		32°F to 122°F [0°C to 50°C]
Operating temperature		Up to 250°F for 1/2 hour per UL555S test
Housing		NEMA type 2 / IP42, UL enclosure type 2
Housing material		UL94-5VA. UL2043 Listed for plenum use
Agency listings†		cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02). UL2043 smoke rated
Noise level (max)	running	< 50 db (A)
	spring return	62 db (A)
	holding	inaudible
Servicing		maintenance free
Quality standard		ISO 9001
Weight	FSTF120 US	1.26 lbs (0.57 kg)
	FSTF120-S US	1.5 lbs (0.68 kg)

† Rated Impulse Voltage 4kV, Type of action 1.AA (1.AA.B for -S version), Control Pollution Degree 3.

FSTF120-S US

Auxiliary switch	2 x SPST 3A (0.5A) @ 120 VAC, UL approved One fixed at 10° and one fixed at 80°
------------------	--

Torque min. 18 in-lb, for control of fire and smoke dampers

Application

The type FSTF spring-return actuator is intended for the operation of smoke and combination fire and smoke dampers in ventilation and air-conditioning systems. The actuator will meet requirements of UL555 and UL555S when tested as an assembly with the damper Square footage of damper operated will depend on make and model.

Operation


Mounting of the actuator to the damper axle shaft or jackshaft is via a cold-weld clamp. Teeth in the clamp and V-bolt dig into the metal of both solid and hollow shafts maintaining a perfect connection. The specially designed clamp will not crush hollow shafts. The bottom end of the actuator is held by an anti-rotation strap or by a stud provided by the damper manufacturer.

The actuator is mounted in its fail safe position with the damper blade(s) typically closed. Upon applying power, the actuator drives the damper to the open position. The internal spring is tensioned at the same time. If the power supply is interrupted, the spring moves the damper back to its fail-safe position.

SAFETY NOTE

Screw a conduit fitting into the actuator's bushing. Jacket the actuator's input and output wiring with suitable flexible conduit. Properly terminate the conduit in a suitable junction box.

Dimensions (Inches [mm])

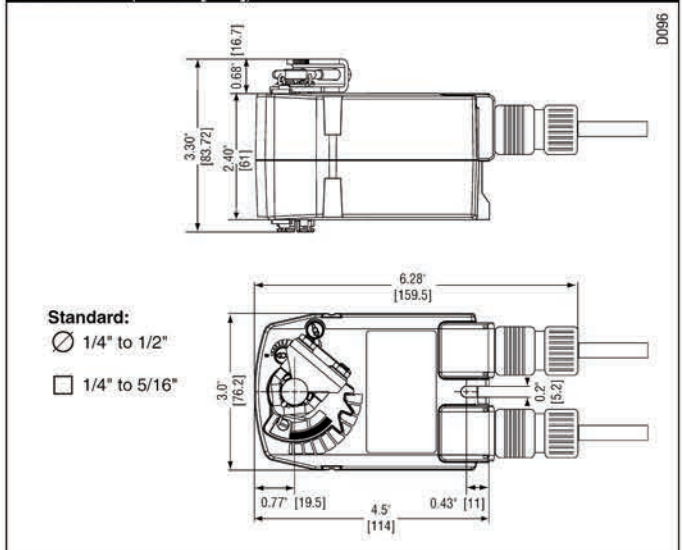

FSTF120(-S) US

On/Off, Spring Return, 120 VAC



Accessories

Tool-06	8mm and 10 mm wrench
KH-TF	Crank arm for up to 1/2" round shaft
ZG-TF2	Crank arm adaptor kit for FSTF
ZG-TF112	Mounting bracket, kit for FSTF
ZS-100	Weather shield (metal)
ZS-150	Weather shield (polycarbonate)
10379-00001	Limit stop

NOTE: When using FSTF120 US and FSTF120-S US actuators, only use accessories listed on this page or those provided by damper manufacturers.

For actuator wiring information and diagrams, refer to Belimo Wiring Guide.

Typical Specification

On/Off fire and smoke spring return damper actuators shall be direct coupled type which require no crank arm and linkage and be capable of direct mounting to a shaft up to a 1/2" diameter and center a 1/2" shaft. The actuators must be designed so that they may be used for either clockwise or counterclockwise fail-safe operation. Actuators shall be protected from overload at all angles of rotation. If required, two SPDT auxiliary switches for position indication shall be provided. Actuators shall be cULus listed and have a 5 year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

Wiring Diagrams

✂️ INSTALLATION NOTES

1 Provide overload protection and disconnect as required.

2 **CAUTION Equipment Damage!**
Actuators may be connected in parallel.
Power consumption must be observed.


4 Two SPST auxiliary switches for position indication. NC switch opens at 10° and NO switch closes at 80°


📄 APPLICATION NOTES

◆ Meets cULus requirements without the need of an electrical ground connection.

⚠️ WARNING Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

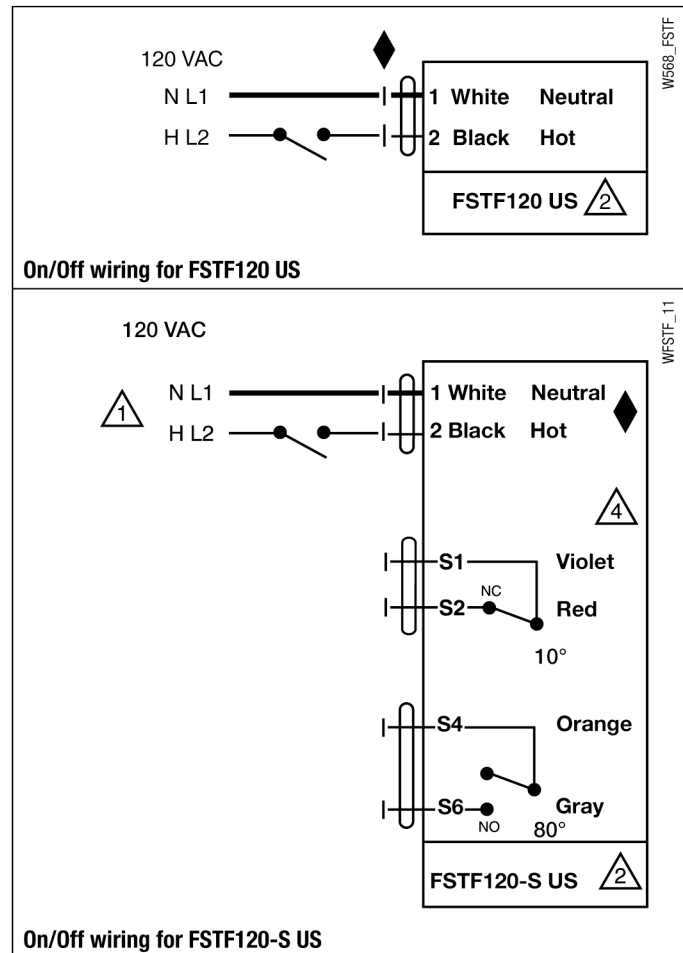

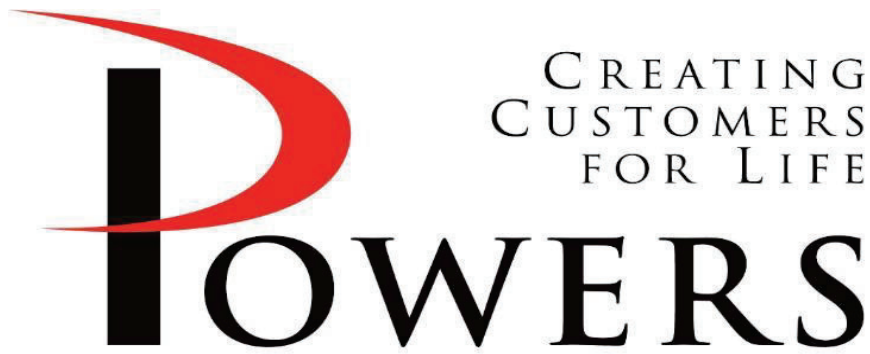

SUBMITTAL

PRODUCT	Duct Access Doors
MANUFACTURER	Pottorff
JOB NAME	UAMS Center for Animal Models of Infection & Disease
LOCATION	Little Rock, AR
ENGINEER	James R. Beecher
CONTRACTOR	Middleton Inc.
DATE	10/16/2024
SUBMITTED BY	Chris Atwood

5440 Northshore Drive - North Little Rock, Arkansas 72118 - Tel: 501.374.5420 Fax: 501.370.9298

Submittal

Model HAD

Duct access door, insulated panel

General construction

Material: Galvanized steel

Door panel: 24 gauge - double wall, insulated


Insulation: 1" thick fiberglass

Gasket: Compressible closed cell neoprene - door to frame and frame to duct


Latches: Cam

Ratings

Operating temperature range: -20°F to 200°F

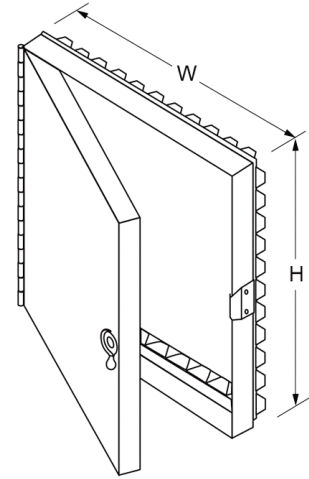

Model HAD



Side view

Details

Line Item	Tag	Qty	Frame gauge	Door Size (in.xxxx)	Duct Opening Size	Qty Latches	Ratings
				W x H	W x H (in)	W x H	Press (in.w.g.)
18	DUCT ACCESS DOORS	4	24	12 x 12	11 x 11	0 x 1	3
20	DUCT ACCESS DOOR	1	22	18 x 18	17 x 17	0 x 2	2
21	DUCT ACCESS DOOR	2	22	24 x 24	23 x 23	0 x 2	2

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

Submittal

Model DMR

Duct access door, round sandwich panel

General construction

Material: Galvanized steel

Door panel: 22 gauge - precision stamped

Gasket: Compressible closed cell neoprene - door panel to duct

Knobs: Molded polypropylene with metal threaded inserts - hand adjustable

Ratings


UL 94 flammability rating: HF1

Maximum system pressure: +20 in.wg. to -10 in.wg.


Operating temperature range: -20°F to 200°F

Options

Insulated Door Panel: True

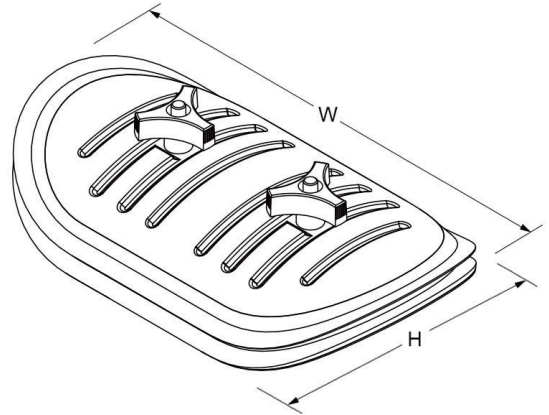

Model DMR



Side view


Details

Line Item	Tag	Qty	Door Panel	Duct Size (in.xxxx)	Door Size (in.xxxx)
			Gauge	D	W x H
22	ROUND DUCT ACC DOOR	1	22	8	8 x 4
23	ROUND DUCT ACC DOOR	1	22	9	8 x 4
24	ROUND DUCT ACC DOOR	2	22	12	12 x 8

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

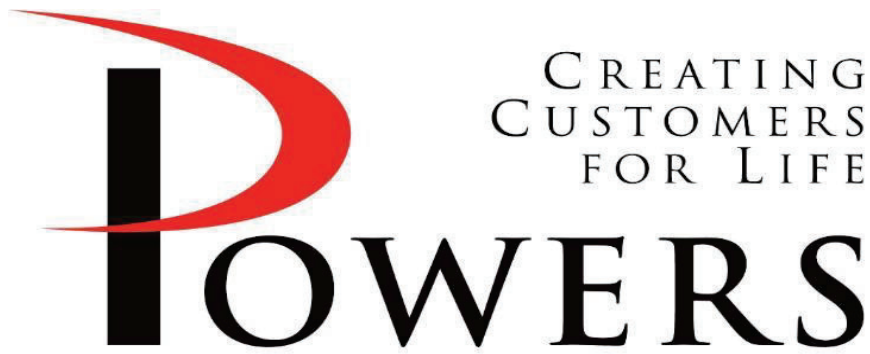

SUBMITTAL

PRODUCT	Backdraft Dampers
MANUFACTURER	Pottorff
JOB NAME	UAMS Center for Animal Models of Infection & Disease
LOCATION	Little Rock, AR
ENGINEER	James R. Beecher
CONTRACTOR	Middleton Inc.
DATE	10/16/2024
SUBMITTED BY	Chris Atwood

5440 Northshore Drive - North Little Rock, Arkansas 72118 - Tel: 501.374.5420 Fax: 501.370.9298

Submittal

Model BD-150


Backdraft damper, extruded blade

General construction


- Dimensions:** Nominal (approximately 1/4" (6) undersize)
- Frame:** 1.875" x 13/16" x 0.081" (46 x 21 x 2) extruded channel
- Blade style:** 0.05" (1.3) thick aluminum, extruded
- Linkage:** Exposed on blade
- Bearings:** Synthetic
- Seals:** Extruded vinyl blade edge seals

Ratings

- Leakage:** 10.7 cfm/ft² @ 1.0 in.w.g. (0.05m³/s/m² @ 0.25 kPa)
- Temperature:** -40°F to 200°F (-40°C to 93°C)
- Blades start to open (in.w.g.):** 0.03
- Blades fully open (in.w.g.):** 0.19

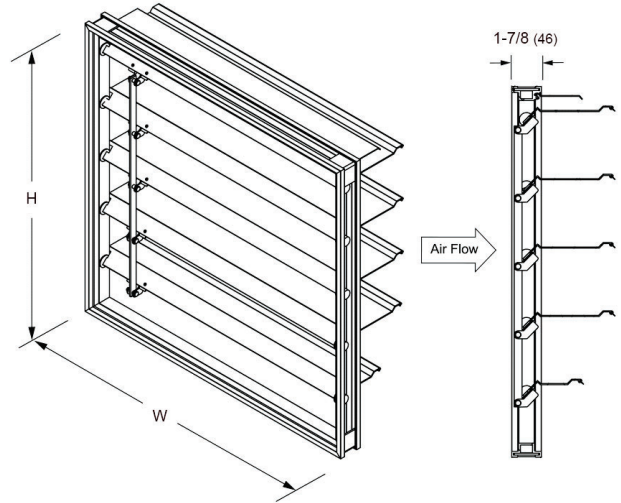

Model BD-150



Horizontal mount (up flow only)

Details

Line item	Tag	Qty	Dimensions (in.xxxx)		Sections Wide x High	Ratings	
			W x H	D		Vel (fpm)	Press (in.w.g.)
25	BACKDRAFT DAMPERS @ CAGE WASH 163	2	10 x 12		1 x 1	1500	6
26	BACKDRAFT DAMEPRS @ MECH 164	3	18 x 8		1 x 1	1500	5

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.


Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.


Submittal Model BD-150 Performance

Pressure drop testing

Pressure drop testing was performed in accordance with AMCA Standard 500-D using the two configurations shown. All data has been corrected to represent air density of 0.075 lb/ft. Actual pressure drop in any ducted HVAC system is a combination of many elements. This information, along with analysis of other system influences, should be used to estimate actual pressure losses for a damper installed in a given HVAC system. Leakage testing was conducted in accordance with ANSI/AMCA 500-D, Figure 5.5. in the intake direction. Data are based on a vertically mounted damper, with gravity used as the only closing torque. Air leakage is based on operation between 32°F (0°C) and 120°F (49°C) and converted to standard air density.

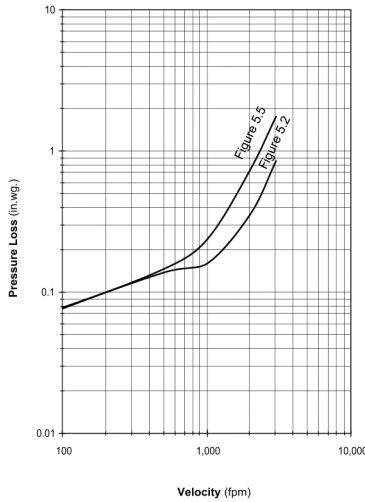

Pressure drop vs. velocity
 24" x 24" damper

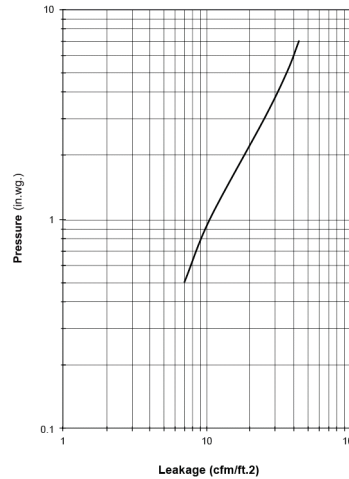

Leakage vs. pressure drop
 24" x 24" damper

Damper Width	Maximum System Pressure	Maximum System Velocity
48" (1219)	3 in.wg. (0.75 kPa)	1500 fpm (7.7 m/s)
36" (914)	4 in. wg. (1.0 kPa)	1500 fpm (7.7 m/s)
24" (610)	5 in. wg. (1.25 kPa)	1500 fpm (7.7 m/s)
12" (305)	6 in. wg. (1.5 kPa)	1500 fpm (7.7 m/s)

Ratings




Certified ratings

Pottorff certifies that the model BD-150 shown herein is licensed to bear the AMCA seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings seal applies to air performance, and air leakage ratings. (AMCA's Certified Ratings Program only allows 24" x 24" backdraft dampers to be tested for certification.)

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

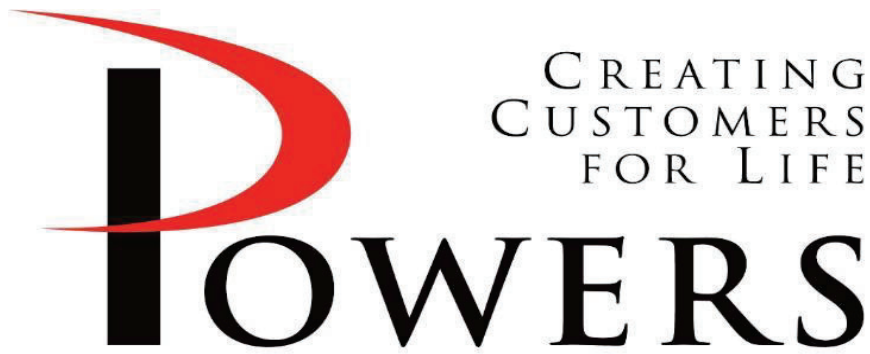

SUBMITTAL

PRODUCT	Bubble Tight Dampers
MANUFACTURER	Greenheck
JOB NAME	UAMS Center for Animal Models of Infection & Disease
LOCATION	Little Rock, AR
ENGINEER	James R. Beecher
CONTRACTOR	Middleton Inc.
DATE	10/16/2024
SUBMITTED BY	Chris Atwood

5440 Northshore Drive - North Little Rock, Arkansas 72118 - Tel: 501.374.5420 Fax: 501.370.9298

The specification called for 304SS frame and blades and Hi Pro Polyester paint coating. Greenheck is not able to furnish both. In order to utilize the coating, the metal has to be Painted Steel. This submittal reflects that option.

HBT-221 Rectangular Bubble Tight Damper

APPLICATION & DESIGN


The HBT-221 is a heavy duty rectangular damper designed for isolation and decontamination applications. The damper has bubble tight leakage performance per AMCA 500-D up to 10 in. wg. The damper frame is flanged for easy mounting and the blade seal is mechanically fastened to the blade.

DAMPER RATINGS

Pressure: Up to 10 in. wg - pressure differential
Velocity: Up to 4,000 ft/min
Leakage: Bubble tight per AMCA 500-D
Temperature: -40 F to 250 F

PRODUCT DETAILS

Frame Material: Painted Steel
Flange Width (D): 2.000 in.
Blade Material: Painted
Blade Thickness: 12 ga
Blade Seal: Silicone
Blade Action: Parallel
Linkage Material: 304 SS
Axle Material: 303 SS
Axle Bearings: Outboard Ball
Axle Seal: Double Gland
Temperature: 250 F

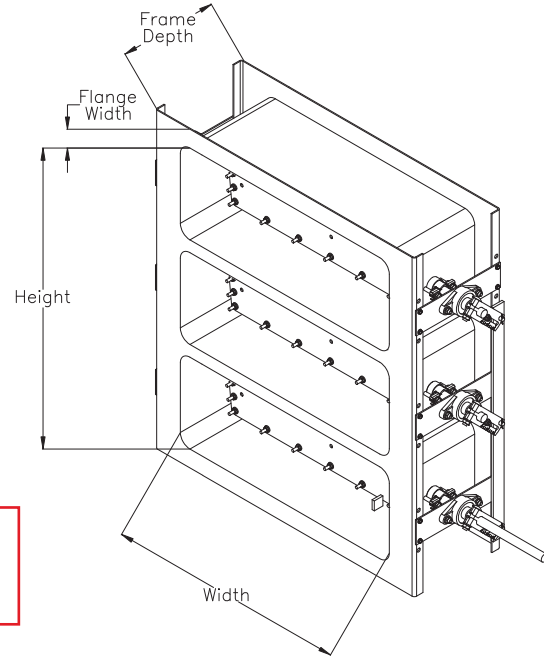

ACTUATOR INFORMATION

Actuator Type: 24 VDC
Operating Mode: Two Position
Actuator Mounting: External
Actuator Manufacturer: All
NEMA Enclosure: 1
Auxiliary Switches: 0

Please verify damper voltage before ordering.

• This drawing shows a general damper configuration and is not intended to depict the exact configuration of all dampers in this submittal.
• Width and Height are based on inside dimensions. Actual sizing only.

• Installation instructions available at www.greenheck.com.

OPTIONS & ACCESSORIES

Coating Type: Hi-Pro Polyester
Coating Color: Concrete Gray-RAL 7023

SUMMARY

ID #	TAG	QTY	WIDTH	HEIGHT	CONFIGURATION			
1-1		1	12.000 in.	8.000 in.	Number of Blades: 1	Required Assy Torque: 105 lb-in.	Frame Depth: 8.000 in.	Axle Diameter: 0.750 in.
					Frame Thickness: 12 ga	Actuator Model: AMB24-3	Actuator Manufacturer: Belimo	Actuator Qty: 1
					Actuator Location: Right	Actuator Operation: PO/PC	Actuator Fail Position: In Place	
1-2		4	12.000 in.	10.000 in.	Number of Blades: 1	Required Assy Torque: 132 lb-in.	Frame Depth: 10.000 in.	Axle Diameter: 0.750 in.
					Frame Thickness: 12 ga	Actuator Model: AMB24-3	Actuator Manufacturer: Belimo	Actuator Qty: 1
					Actuator Location: Right	Actuator Operation: PO/PC	Actuator Fail Position: In Place	

ID #	TAG	QTY	WIDTH	HEIGHT	CONFIGURATION			
					1-3		1	14.000 in.
Frame Thickness: 12 ga	Actuator Model: GMB24-3	Actuator Manufacturer: Belimo	Actuator Qty: 1					
Actuator Location: Right	Actuator Operation: PO/PC	Actuator Fail Position: In Place						

HBTR-151 Round Bubble Tight Damper

APPLICATION & DESIGN


The HBTR-151 is a heavy duty round bubble tight damper designed for isolation and decontamination applications. The damper has bubble tight leakage per AMCA 500-D up to 10 in. wg. The damper frame is flanged for easy mounting and the blade seal is mechanically fastened to the blade. Every HBTR-151 is factory leakage tested to ensure bubble tight seal and is recommended for two position shut off applications.

DAMPER RATINGS

Pressure: Up to 10 in. wg - pressure differential
Velocity: Up to 3,900 ft/min
Leakage: Bubble tight per AMCA 500-D
Temperature: -40 F to 250 F

PRODUCT DETAILS

Frame Type: Flanged Channel
Material: Painted
Blade Type: Round, center pivoted, double skin
Blade Seal: Silicone Rubber
Axle/Linkage: 303 SS
Axle Bearings: Outboard Ball
Axle Seals: Double Gland
Sizing: Actual

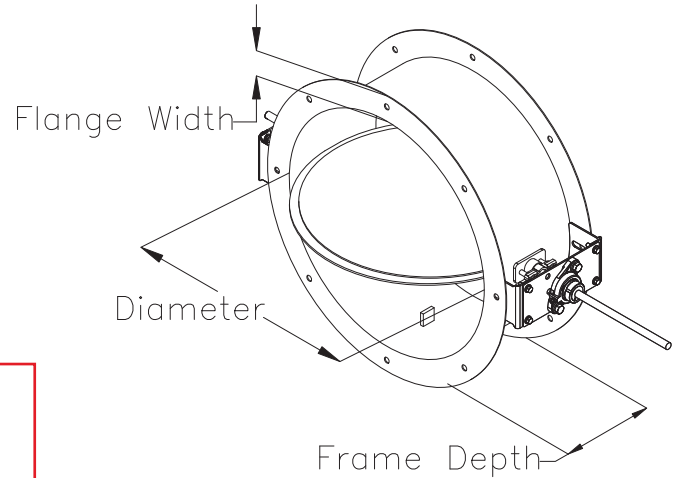

ACTUATOR INFORMATION

Actuator Type: 24 VDC
Actuator Mounting: External
Operating Mode: Two Position
NEMA Enclosure Type: 1
Auxiliary Switches: No

Please verify damper voltage before ordering.

*• This drawing shows a general damper configuration and is not intended to depict the exact configuration of all dampers in this submittal.
 • Electrical accessory wiring terminates at the accessory. Field wiring is required to individual components.*

OPTIONS & ACCESSORIES

Mounting Holes: Both Flanges
Hole Placement: OnCenterline
Finish Type: Hi-Pro Polyester
Finish Color: Concrete Gray-RAL 7023

SUMMARY

ID #	TAG	QTY	DIAMETER (D)	CONFIGURATION			
				Assembly Torque	Frame Depth (J)	Frame Thickness	Flange Width (F)
2-1		1	8.000 in.	64 lb-in.	6.000 in.	0.105 in.	1.500 in.
				Axle Diameter 0.500 in.	Blade Thickness 0.105 in.	Mtg Holes Edited False	Bolt Circle Dia (L) 9.750 in.
				Qty of Holes (N) 4	Hole Diameter (M) 0.375 in.	Actuator Location Right Side	Actuator Mfr. Belimo
				Actuator Model NMB24	Actuator Qty 1	Actuator Fail Position In Place	Actuator Operation PO/PC
2-2		1	10.000 in.	100 lb-in.	6.000 in.	0.105 in.	1.500 in.
				Axle Diameter 0.500 in.	Blade Thickness 0.105 in.	Mtg Holes Edited False	Bolt Circle Dia (L) 11.750 in.
				Qty of Holes (N) 8	Hole Diameter (M) 0.438 in.	Actuator Location Right Side	Actuator Mfr. Belimo
				Actuator Model AMB24-3	Actuator Qty 1	Actuator Fail Position In Place	Actuator Operation PO/PC

ID #	TAG	QTY	DIAMETER (D)	CONFIGURATION			
				2-3		3	12.000 in.
				Axle Diameter 0.500 in.	Blade Thickness 0.105 in.	Mtg Holes Edited False	Bolt Circle Dia (L) 13.750 in.
				Qty of Holes (N) 8	Hole Diameter (M) 0.438 in.	Actuator Location Right Side	Actuator Mfr. Belimo
				Actuator Model AMB24-3	Actuator Qty 1	Actuator Fail Position In Place	Actuator Operation PO/PC
2-4		1	14.000 in.	Assembly Torque 196 lb-in.	Frame Depth (J) 8.000 in.	Frame Thickness 0.105 in.	Flange Width (F) 1.500 in.
				Axle Diameter 0.750 in.	Blade Thickness 0.105 in.	Mtg Holes Edited False	Bolt Circle Dia (L) 15.750 in.
				Qty of Holes (N) 8	Hole Diameter (M) 0.438 in.	Actuator Location Right Side	Actuator Mfr. Belimo
				Actuator Model GMB24-3	Actuator Qty 1	Actuator Fail Position In Place	Actuator Operation PO/PC

Bubble Tight Dampers Supplemental Information - HBT/HBTR Series


QA and Testing

All Greenheck industrial dampers are produced under our ISO9001- 2015 Quality Assurance Program in Schofield, WI. Each bubble tight damper is tested before shipment. We test every unit per the AMCA Standard 500D test procedures. Testing procedures also comply with ASME AG-1 and obsolete codes ASME N509 and N510 which are often specified although obsolete. Test pressure is applied to the damper based on the models rated pressure, plus a minimum of 10% extra. All welded seams, axle penetrations and bolted connections are verified for zero leakage. The units are tested in both directions, so installation direction is irrelevant. We place a “bubble tight tested” sticker on the unit and attach a test report form to the damper for shipment to the job site. Greenheck retains copies of the test report in our systems if additional copies are needed.



Construction

Bubble tight dampers are an all welded design. Welding will be via Greenheck standard welding which is based on American Weld Society (AWS) weld procedures. Welders and procedures are certified and documented to AWS standards. Weld inspection reports by AWS certified weld instructor can be provided if requested prior to order. Standard material options are painted steel, 304SS and 316SS. 304 Materials are dual certified 304/304L. 316 Materials are dual certified 316/316L. Material thicknesses vary depending on damper sizes and model selections. Requests for increased material thickness can be reviewed on a per project bases through a special design request (SDR). Mounting holes can be selected and edited within CAPS to meet project specifications such as maximum 4 inches O.C. distance (ERDA 76 Std) or custom mounting hole patterns can be provided by submitting a special design request (SDR).

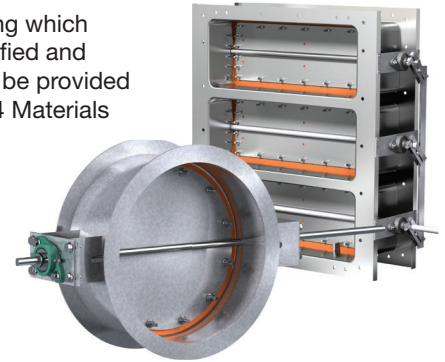

Blade Direction

Dampers are designed for axles to be horizontal after installation. Damper installations with the axle running vertically are not recommended as the weight of the damper blade and axle can prevent the blade seals from being properly centered. If vertically bladed units are required, please contact your representative for SDR information.

Seals

Bubble tight dampers are designed with a full perimeter sweep seal. This seal is made of silicone rubber for best sealing results and the lowest torque requirements. Dampers were prototyped to 10,000 cycles without failure to the seal. Greenheck does not recommend using alternate seal materials as they have shown to increase the torque value to 2-4 times that of silicone and generally have a shorter life span. They will also require larger actuators and more rugged blade and axles sizes which can significantly increase costs. Every 5-7 years, the silicone blade seal should be evaluated for wear or dry rotting. The seal should be replaced if there appears to be damage or degradation in any way.

Temperature

The HBTR and HBT series dampers are ideally designed for -40°F to 250°F (-40°C to 121°C) temperatures. At temperatures above 250°F (121°C) the blade and axles could have excessive movement due to thermal expansion of the materials. The direction and amount of expansion can be unpredictable causing the damper seals to not properly seat against the frame and may cause the damper seals to lose effectiveness.

Actuators

Bubble tight dampers are designed as 2-position dampers – fully open or full closed. They are not designed to be modulated due to the blade seal configuration. The blade seal is a fold-over sweep seal design and modulating the damper may cause problems with the folding of the seal and prevent the bubble tight effectiveness of the seal.

Greenheck strongly recommends that actuators be ordered and installed from the factory. This allows us to properly install, set up and cycle the actuators on the damper and ship them complete to the job site. If dampers are ordered without actuators Greenheck can supply two actuator mounting angles on the damper frame (“bracket only” in CAPS). The job site will be responsible for actuators as well as any additional components used for mounting. Additional components depend on actuator style and include, but are not limited to, mounting plates, additional brackets, and coupling. If dampers are ordered without actuators, the axles come standard without keyways.



AMB24-3 Technical Data Sheet

On/Off, Floating Point, Non-Spring Return, 24 V



Technical Data	
Power Supply	24 VAC, ±20%, 50/60 Hz, 24 VDC, ±20%
Power consumption in operation	2.5 W
Power consumption in rest position	0.5 W
Transformer sizing	5.5 VA (class 2 power source)
Shaft Diameter	1/2...1.05" round, centers on 1/2" and 3/4" with insert, 1.05" without insert
Electrical Connection	18 GA plenum cable, 3 ft [1 m], with 1/2" conduit connector, degree of protection NEMA 2 / IP54
Overload Protection	electronic throughout 0...95° rotation
Input Impedance	600 Ω
Angle of rotation	Max. 95°, adjustable with mechanical stop
Torque motor	180 in-lb [20 Nm]
Direction of motion motor	selectable with switch 0/1
Position indication	Mechanically, 30...65 mm stroke
Manual override	external push button
Running Time (Motor)	95 s, constant, independent of load
Ambient humidity	max. 95% r.H., non-condensing
Ambient temperature	-22...122°F [-30...50°C]
Storage temperature	-40...176°F [-40...80°C]
Degree of Protection	IP54, NEMA 2, UL Enclosure Type 2
Housing material	UL94-5VA
Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU and 2014/35/EU
Noise level, motor	45 dB(A)
Servicing	maintenance-free
Quality Standard	ISO 9001
Weight	1.1 lb [1.0 kg]

†Rated Impulse Voltage 800V, Type action 1.B, Control Pollution Degree 3.

Torque min. 180 in-lb, for control of damper surfaces up to 45 sq. ft.


Application

For on/off and floating point control of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications.

The actuator is mounted directly to a damper shaft up to 1.05" in diameter by means of its universal clamp, self-centered default. A crank arm and several mounting brackets are available for applications where the actuator cannot be direct coupled to the damper shaft.

Operation

The actuator is not provided with and does not require any limit switches, but is electronically protected against overload. The anti-rotation strap supplied with the actuator will prevent lateral movement. The actuator provides 95° of rotation and a visual indicator indicates position of the actuator. When reaching the damper or actuator end position, the actuator automatically stops. The gears can be manually disengaged with a button on the actuator cover. The actuators use a sensorless brushless DC motor, which is controlled by an Application Specific Integrated Circuit (ASIC). The ASIC monitors and controls the actuator's rotation and provides a digital rotation sensing (DRS) function to prevent damage to the actuator in a stall condition. Power consumption is reduced in holding mode. The -S version is provided with 1 built-in auxiliary switch. This SPDT switch is provided for safety interfacing or signaling, for example, for fan start-up. The switching function is adjustable 0 to 95°. The auxiliary switch is double insulated so an electrical ground connection is not necessary. Add-on auxiliary switches or feedback potentiometers are easily fastened directly onto the actuator body for signaling and switching functions.

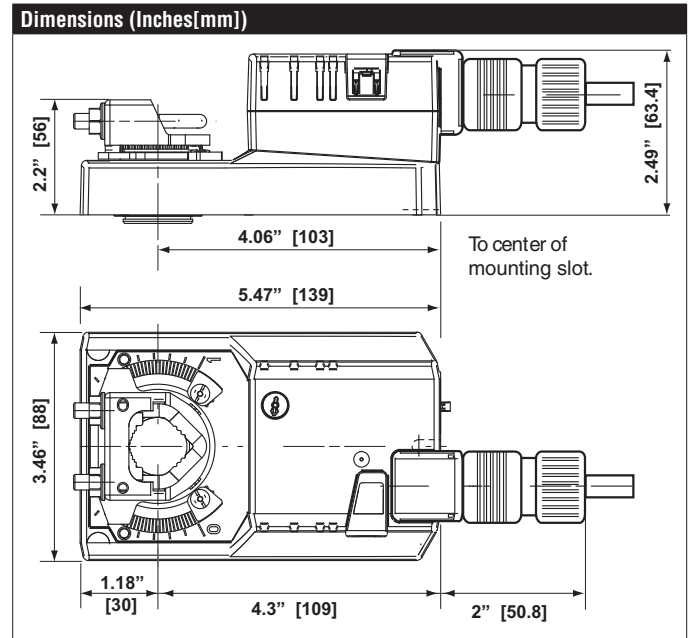

Date created, 02/10/2020 - Subject to change. © Belimo Aircontrols (USA), Inc.





Accessories	
K-SA	Shaft clamp reversible
ZG-100	Univ. right angle bracket 17"x11-1/8"x6" (HxWxbase).
ZG-101	Univ. right angle bracket 13x11x7-7/16" (HxWxbase).
ZG-103	Univ. right angle bracket 7-1/2x11x2-3/4" (HxWxbase).
ZG-104	Univ. right angle bracket 13-5/8x7-1/2x4" (HxWxbase).
ZG-NMA	Mounting kit for linkage operation
AV8-25	Shaft extension
ZG-JSA-1	1" diameter jackshaft adaptor (11" L).
ZS-T	Terminal-strip cover for NEMA 2 rating (-T models).
ZS-100	Weather shield - galvanneal 13x8x6" (LxWxD).
ZS-150	Weather shield - PC w/ foam seal 16x8-3/8x4" (LxWxD).
ZS-260	Explosion proof housing.
ZS-300	NEMA 4X, 304 stainless steel enclosure.
TOOL-06	8 mm and 10 mm wrench.
PS-100	Low voltage and control signal simulator.
S1A	Auxiliary switch for damper actuators and rotary actuators
S2A	Auxiliary switch for damper actuators and rotary actuators
P1000A GR	Feedback potentiometer for damper actuators and rotary actuators

Typical Specification

Floating point, on/off control damper actuators shall be electronic direct-coupled type, which require no crank arm and linkage and be capable of direct mounting to a shaft up to 1.05" diameter. Actuators shall have brushless DC motor technology and be protected from overload at all angles of rotation. Actuators shall have reversing switch and manual override on the cover. If required, actuators shall be provided with one adjustable SPDT auxiliary switch. Actuators with auxiliary switches must be constructed to meet the requirements for double insulation so an electrical ground is not required to meet agency listings. If required, actuators will be provided with a screw terminal strip for electrical connections (AMX24-3-T). Run time shall be constant and independent of torque. Actuators shall be cULus listed, have a 5-year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.


Wiring Diagrams

- Actuators with appliance cables are numbered.
- Provide overload protection and disconnect as required.
- Actuators may also be powered by 24 VDC.
- Actuators Hot wire must be connected to the control board common.
- Only connect common to neg. (-) leg of control circuits. Terminal models (-T) have no-feedback.
- Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

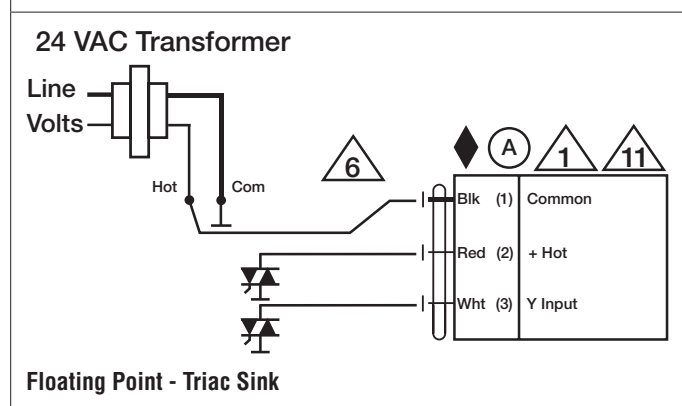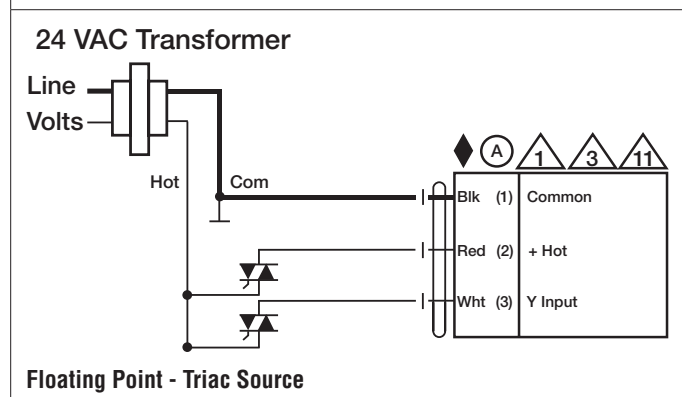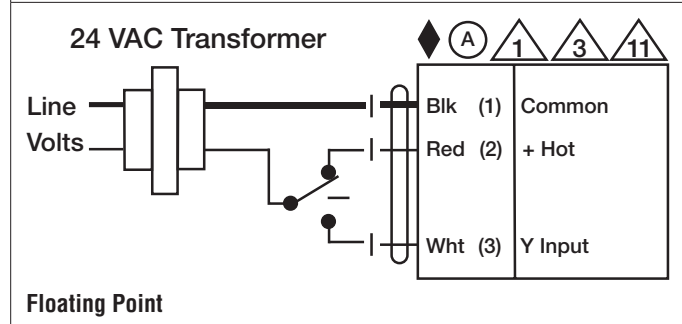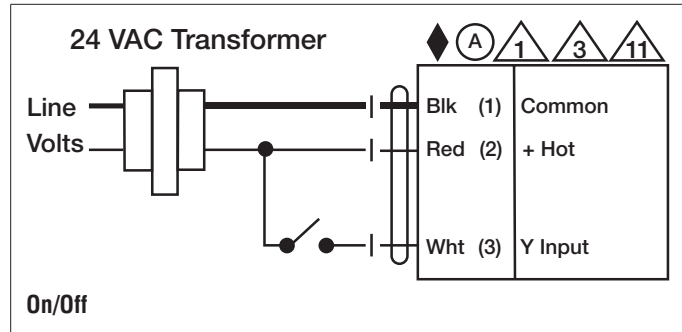

GMB(X)24-3

On/Off, Floating Point, Non-Spring Return, 24 V

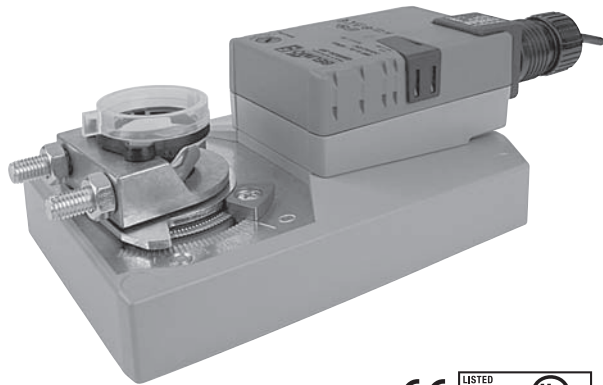

Technical Data	GMB(X)24-3
Power supply	24 VAC \pm 20% 50/60 Hz 24 VDC \pm 10%
Power consumption	4 W (2 W)
Transformer sizing	6 VA (Class 2 power source)
Electrical connection	18 GA plenum rated cable 1/2" conduit connector protected NEMA 2 (IP54) 3 ft [1m] 10 ft [3m] 16 ft [5m]
Overload protection	electronic throughout 0 to 95° rotation
Control	on/off, floating point
Input impedance	600 Ω
Angle of rotation	max. 95°, adjustable with mechanical stop
Torque	360 in-lb [40 Nm]
Direction of rotation	reversible with switch
Position indication	reflective visual indicator (snap-on)
Manual override	external push button
Running time	150 seconds, constant independent of load
Humidity	5 to 95% RH non condensing (EN 60730-1)
Ambient temperature	-22°F to +122°F [-30°C to +50°C]
Storage temperature	-40°F to +176°F [-40°C to +80°C]
Housing	NEMA 2, IP54, UL enclosure type 2
Housing material	UL94-5VA
Agency listings†	cULus acc. to UL 60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2004/108/EEC and 2006/95/EC
Noise level	<45dB(A)
Servicing	maintenance free
Quality standard	ISO 9001
Weight	3.4 lbs [1.55 kg]

†Rated Impulse Voltage 800V, Type of action 1, Control Pollution Degree 3.

Torque min. 360 in-lb for control of damper surfaces up to 90 sq ft.

Application

For on/off and floating point control of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications.

The actuator is mounted directly to a damper shaft up to 1.05" in diameter by means of its universal clamp. A crank arm and several mounting brackets are available for applications where the actuator cannot be direct coupled to the damper shaft.

Operation


The actuator is not provided with and does not require any limit switches, but is electronically protected against overload. The anti-rotation strap supplied with the actuator will prevent lateral movement.

The GMB(X) series provides 95° of rotation and a visual indicator indicates position of the actuator. When reaching the damper or actuator end position, the actuator automatically stops. The gears can be manually disengaged with a button on the actuator cover.

The GMB(X)24-3... actuators use a brushless DC motor, which is controlled by an Application Specific Integrated Circuit (ASIC). The ASIC monitors and controls the actuator's rotation and provides a digital rotation sensing (DRS) function to prevent damage to the actuator in a stall condition. Power consumption is reduced in holding mode.

Add-on auxiliary switches or feedback potentiometers are easily fastened directly onto the actuator body for signaling and switching functions.

Dimensions (Inches [mm])

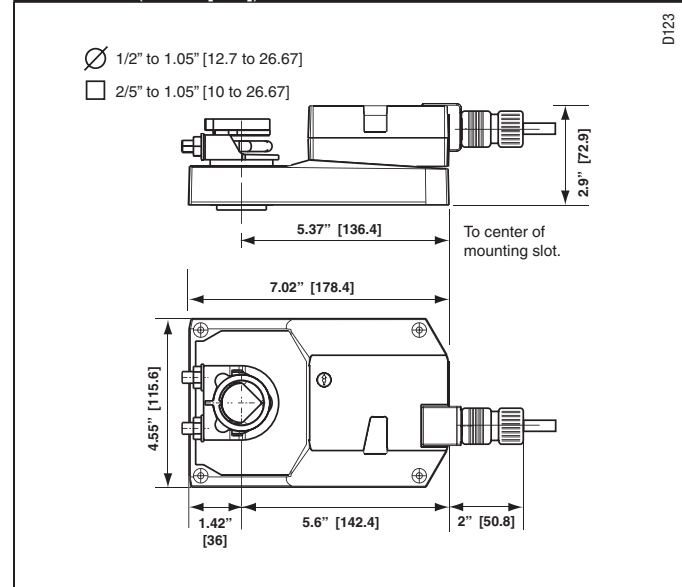

M40024 - 05/10 - Subject to change. © Belimo Aircontrols (USA), Inc.

Accessories	
K-GM20	1/2"-1.05 [12.7 to 26.67 mm] Shaft Clamp
ZG-102	Multiple Actuator Mounting Bracket
Z-GMA	GM to GM Retrofit Mounting Bracket
ZG-GMA	Crank arm Adaptor Kit
ZG-JSA (-1, 2, 3)	Jackshaft Adaptors for Hollow Jackshafts
ZS-100	Weather Shield - Steel
ZS-150	Weather Shield - Polycarbonate
ZS-260	Explosion Proof Housing
ZS-300 (-1) (-5)	NEMA 4X Housing
Tool-07	13 mm Wrench
S1A, S2A	Auxiliary Switch (es)
P370	Shaft Mount Auxiliary Switch
P...A	Feedback Potentiometers

NOTE: When using GMB(X)24-3... actuators, only use accessories listed on this page.

Typical Specification

Floating point, on/off control damper actuators shall be electronic direct-coupled type, which require no crank arm and linkage and be capable of direct mounting to a shaft up to 1.05" diameter. Actuators shall have brushless DC motor technology and be protected from overload at all angles of rotation. Actuators shall have reversing switch and manual override on the cover. Run time shall be constant and independent of torque. Actuators shall be cULus listed, have a 5-year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

Wiring Diagrams

INSTALLATION NOTES


- 1 Provide overload protection and disconnect as required.
- 3 Actuators may also be powered by 24 VDC.

APPLICATION NOTES


Meets cULus requirements without the need of an electrical ground connection.

WARNING Live Electrical Components!


During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

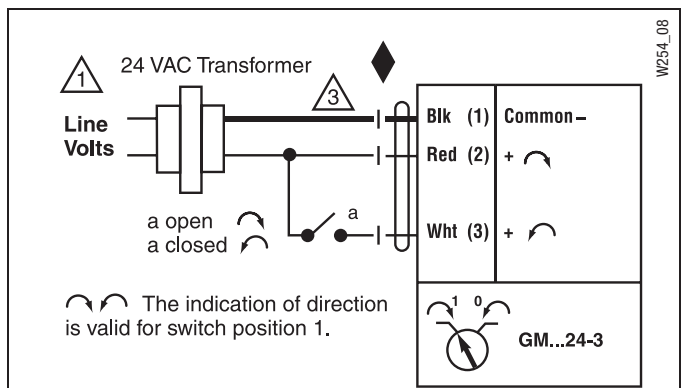


On/Off control

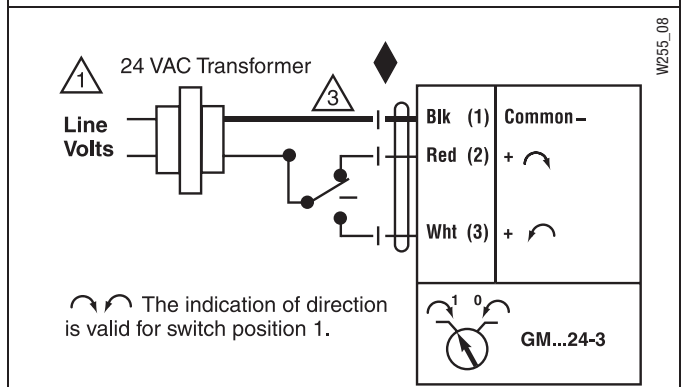


Floating Point or On/Off control

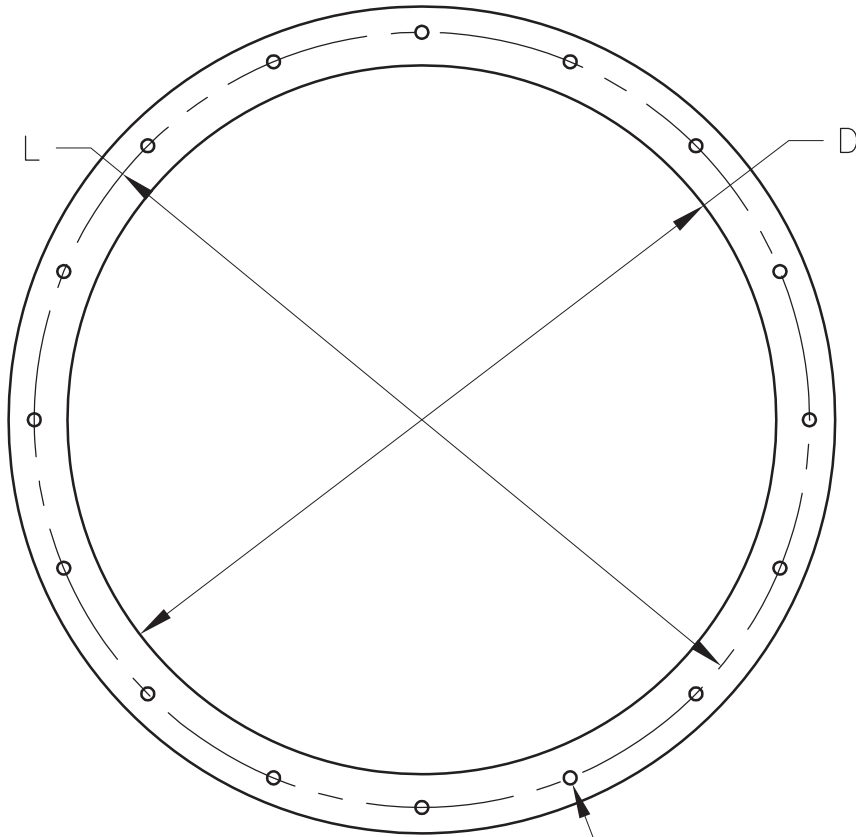

(N) ϕM HOLES
ON ϕL BOLT HOLE DIA.

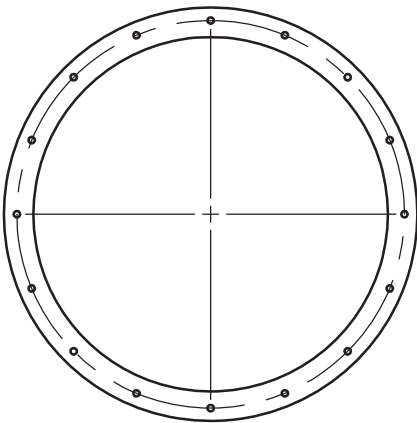


ON CENTERLINE

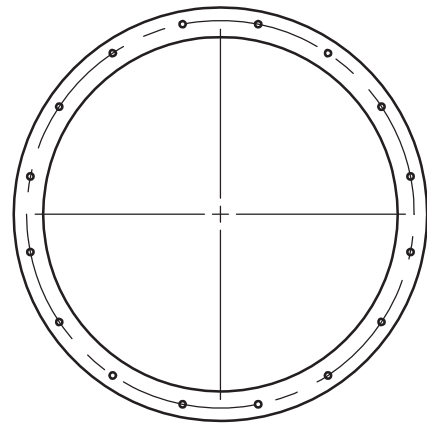

STRADDLE CENTERLINE

ROUND DAMPER
MOUNTING HOLE

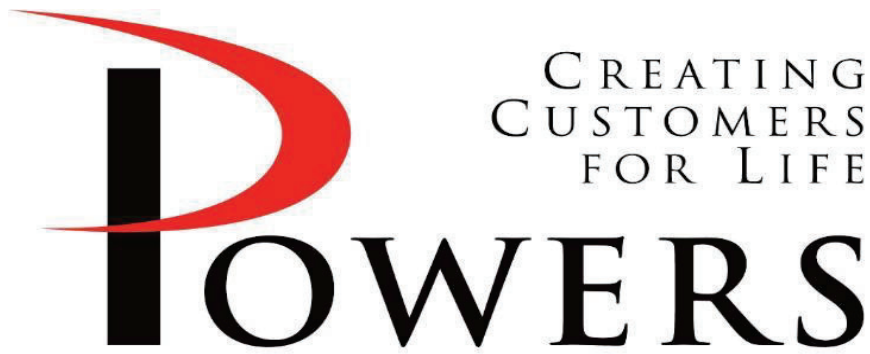

SUBMITTAL

PRODUCT	Motorized Dampers MD-1
MANUFACTURER	Greenheck
JOB NAME	UAMS Center for Animal Models of Infection & Disease
LOCATION	Little Rock, AR
ENGINEER	James R. Beecher
CONTRACTOR	Middleton Inc.
DATE	10/16/2024
SUBMITTED BY	Chris Atwood

5440 Northshore Drive - North Little Rock, Arkansas 72118 - Tel: 501.374.5420 Fax: 501.370.9298

HCDR-350 Heavy duty round industrial control damper

APPLICATION & DESIGN


Model HCDR-350 is a heavy duty round industrial control damper with a flange style frame. It is designed to control airflow and provide shut off in HVAC or industrial process control systems.

DAMPER RATINGS

Pressure: Up to 20 in. wg
Velocity: Up to 6,400 ft/min
Temperature: -60 F to 1,000 F

PRODUCT DETAILS

Operating Temperature 250 F
Material Painted
Blade Material Painted
Blade Seal Silicone
Blade Stops Rolled Bar
Axle Bearings External Bronze
Axle Material 316 SS
Axle Shaft Seal None

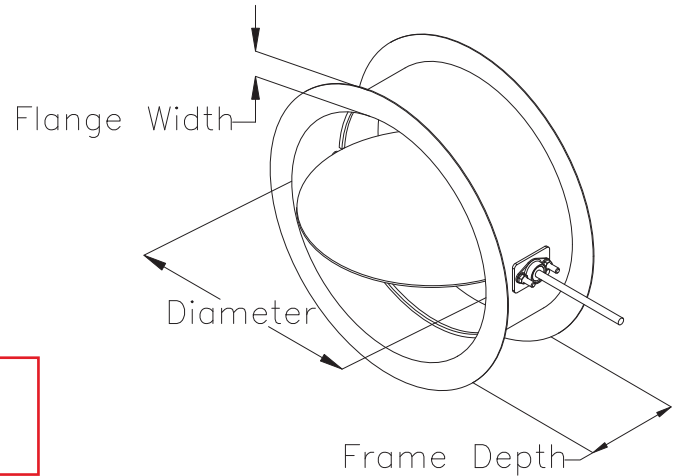

ACTUATOR INFORMATION

Actuator Type 24 VDC
Actuator Mounting External
Operating Mode Modulating
NEMA Enclosure Type 1
Auxiliary Switches 2
Control Signal 2-10 VDC

Please verify damper voltage before ordering.

** This drawing shows a general damper configuration and is not intended to depict the exact configuration of all dampers in this submittal.
* Electrical accessory wiring terminates at the accessory. Field wiring is required to individual components.*

OPTIONS & ACCESSORIES


Mounting Holes None
Finish Type Hi-Pro Polyester
Finish Color Concrete Gray-RAL 7023

SUMMARY

ID #	TAG	QTY	DIAMETER (D)	CONFIGURATION		
3-1		2	20.000 in.	Velocity	Static Pressure	Required Assembly Torque
				2,500 ft/min	1 in. wg	151 lb-in.
				Frame Depth (J)	Frame Thickness	Flange Width (F)
				8.000 in.	0.135 in.	1.500 in.
				Axle Diameter	Blade Thickness	Actuator Location
0.750 in.	0.188 in.	Right Side				
			Actuator Model	Actuator Qty	Actuator Fail Position	
			MS7520A2213	1	Closed	
			Actuator Mfr.	Actuator Operation		
			Honeywell	Spring Return		
3-2		2	42.000 in.	Velocity	Static Pressure	Required Assembly Torque
				2,500 ft/min	1 in. wg	719 lb-in.
				Frame Depth (J)	Frame Thickness	Flange Width (F)
				8.000 in.	0.188 in.	2.000 in.
				Axle Diameter	Blade Thickness	Actuator Location
1.250 in.	0.250 in.	Right Side				
			Actuator Model	Actuator Qty	Actuator Fail Position	
			S70-020	1	In Place	
			Actuator Mfr.	Actuator Operation		
			Bray	PO/PC		

External Bearing Application & Design

Bearings are bolted to the external side of the damper frame.

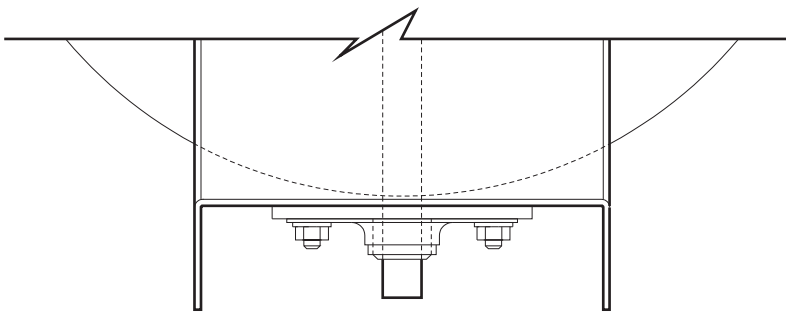

Honeywell MS75XX Modulating Actuators

Application

The MS75XX series modulating and floating actuators are spring return direct coupled actuators (DCA). The actuator accepts an on/off signal from a single-pole, single-throw (spst) controller. Reversible mounting allows actuator to be used for either clockwise (cw) or counterclockwise (ccw) spring rotation.


Environmental Protection Ratings:

Nema 2

Temperature

Ambient: -40°F to 149°F (-40°C to 65°C)


Storage: -40°F to 150°F (-40°C to 65°C)

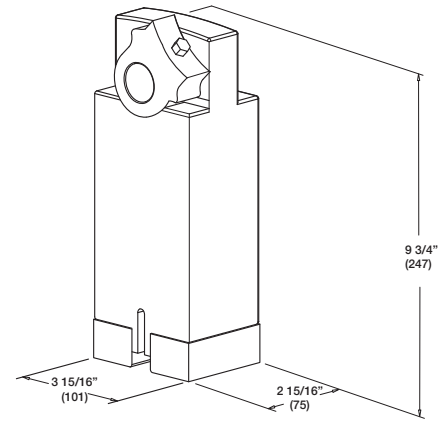

Model	Auxiliary Switches	Power Consumption		Voltage Input in Vac	Torque Rating		Timing in Seconds	
		Running	Holding		Holding lb. in. (Nm)	Driving lb. in. (Nm)	Drive Open	Spring Close
MS7505A2030	No	8VA	5VA	24 VAC/DC 50/60 Hz	105 (12)	44 (5)	90	25
MS7505A2130	Yes	8VA	5VA		105 (12)	44(5)	90	25
MS7510A2008	No	14VA	5VA		150 (17)	88 (10)	90	20
MS7510A2206	Yes	14VA	5VA		150 (17)	88 (10)	90	20
MS7520A2007	No	16VA	5VA		300 (34)	175 (20)	90	20
MS7520A2015	No	22 VA	5VA		175 (20)	175 (20)	60	20
MS7520A2205	Yes	16VA	5VA		300 (34)	175 (20)	90	20
MS7520A2213	Yes	22 VA	5VA		175 (20)	175 (20)	60	20

Space Envelopes for FSD, SMD and VCD Series


For Vertical Blade

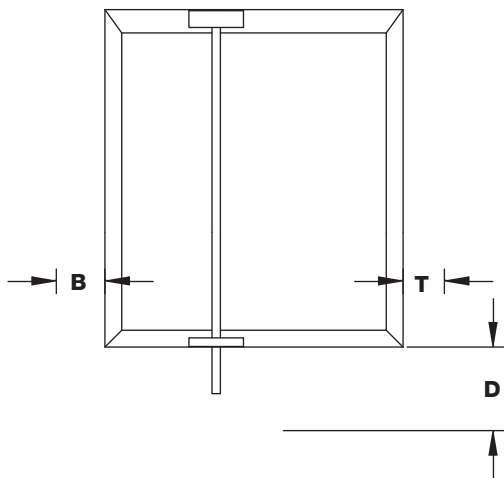

Width	"T"	"B"	"D"
≥6 (152) to <10 (254)	0	12.75 (324)	6 (152)
≥10 (254) to <18 (457)	0	7 (178)	6 (152)
≥18 (457)	0	0	6 (152)

Dimensions are in inches (mm).

For Horizontal Blade

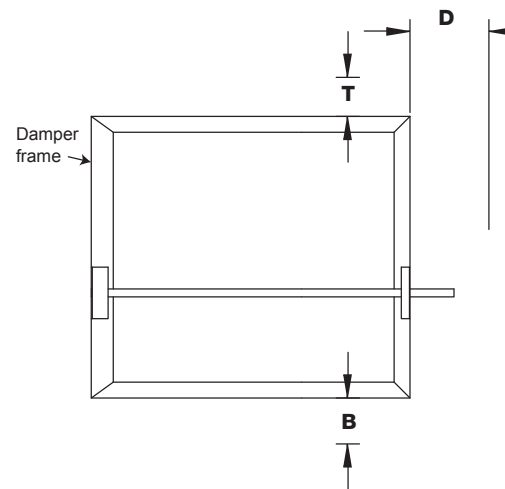

Height	Piggyback			
	"T"	"B"	"D"	"D"
≥6 (152) to <10 (254)	0	12.75 (324)	6 (152)	9 (229)
≥10 (254) to <18 (457)	0	7 (178)	6 (152)	9 (229)
≥18 (457)	0	0	6 (152)	9 (229)

Dimensions are in inches (mm).

Due to continuous product improvement, the actuator manufacturer reserves the right to change specifications without notice. For the most up-



MSXX20 Series

175 LB-IN (20 NM) SPRING RETURN DIRECT COUPLED ACTUATORS

MS4120, MS7520, MS8120 Spring Return Direct Coupled Actuators (DCA) are used within heating, ventilating, and air-conditioning (HVAC) systems. They can drive a variety of quarter-turn, final control elements requiring spring return fail-safe operation. Applications include:

- Volume control dampers, mounted directly to the drive shaft or remotely (with the use of accessory hardware).
- Quarter-turn rotary valves, such as ball or butterfly valves mounted directly to the drive shaft.
- Linear stroke globe or cage valves mounted with linkages to provide linear actuation.

SPECIFICATIONS

Torque Ratings:

- Typical Holding, Driving, Spring Return: 175 lb-in. (20 Nm).
- Stall Maximum (fully open at 75°F): 350 lb-in. (39.6 Nm).

Electrical Ratings:

See Table .

Electrical Connections:

- Field wiring 14 to 22 AWG (2.0 to 0.344 mm sq) to screw terminals, located under the removable access cover.

Stroke:

- 95° ±3°, mechanically limited.

Controller Type:

- See Models.
- Modulating (Series 70) or Floating (Series 60); controlled by selector switch.
- Input Impedance: 95K ohms minimum.
- Feedback Signal: 0 or 2-10 Vdc;
Driving current is 3 mA minimum.

Timing (At Rated Torque and Voltage):

- Drive Open (typical):
 - Floating, Modulating Models: 90 seconds.
 - Two-Position Models: 45 seconds ±5 seconds.
- Spring Close: 20 seconds typical.

Temperature Ratings:

- Ambient: -40°F to 140°F (-40°C to 60°C).
- Shipping and Storage: -40°F to 158°F (-40°C to 70°C).

Humidity Ratings:

- 5% to 95% RH noncondensing.

Design Life (at Rated Voltage):

- Two-position models: 50,000 full stroke cycles;
50,000 full stroke spring returns.
- Floating and Modulating models: 60,000 full stroke cycles;
1,500,000 repositions; 60,000 full stroke spring returns.

End Switches (Two SPDT):

- Dry Contact
- Settings (fixed): 7° nominal stroke, 85° nominal stroke.
- Ratings (maximum load): 250 Vac, 5A resistive.

Dimensions:

- See Fig. 1.

Device Weight:

- 6 lb (2.7 kg)

Mounting:

- Self-centering shaft adapter (shaft coupling).
 - Round Damper Shafts: 0.375 to 1.06 in. (10 to 27 mm).
 - Square Damper Shafts: 1/2 to 3/4 in. (12 to 19 mm).

SPECIFICATION DATA

FEATURES

- Brushless DC submotor with electronic stall protection for floating/modulating models.
- Brush DC submotor with electronic stall protection for 2-position models.
- Self-centering shaft adapter (shaft coupling) for wide range of shaft sizes.
- Models available for use with two-position, single pole single throw (spst), line- (Series 40) or low- (Series 80) voltage controls.
- Models available for use with floating or switched single-pole, double-throw (spdt) (Series 60) controls.
- Models available for use with proportional current or voltage (Series 70) controls.
- Models available with combined floating/modulating control in a single device.
- Models available with adjustable zero and span.
- Models available with line-voltage internal end switches.
- Models available with 3-foot, 18 AWG color-coded cable.
- Access cover to facilitate connectivity.
- Metal housing with built-in mechanical end limits.
- Spring return direction field-selectable.
- Shaft position indicator and scale.
- Manual winding capability with locking function.
- UL (cUL) listed and CE compliant.
- All Models are plenum-rated per UL873.

Cable Specification:

- 300 V, 75° C, Plenum Rated, 3 ft length from end of access cover, 18 AWG

Noise Rating at 1m (Maximum):

- Holding: 20 dBA (no audible noise).
- Two-position models:
 - Driving: 50 dBA.
 - Spring Return: 65 dBA.
- Floating and Modulating models:
 - Driving: 40 dBA.
 - Spring Return: 50 dBA.

Vibration:

- Not suitable for high vibration applications (Example installation environment: Truck Trailers or Railroad Cars)
- Acceptable Vibration Levels 0.6g at 30 to 300 Hz.

Environmental Protection Ratings:

- NEMA2 (US Models) or IP54 (European Models) when mounted on horizontal shaft with access cover below shaft.

Approvals:

- UL/cUL.
- UL873 Plenum Rating, File No. E4436; Guide No. XAPX.
- CE.
- C-TICK.

Accessories:

- 27518 Balljoint (5/16 in.)



MSXX20 SERIES

- ❑ 103598 Balljoint (1/4 in.).
- ❑ 205860 Electronic Minimum Position Potentiometer.
- ❑ 27520A-E,G,H-L,Q Pushrod (5/16 in. diameter).
- ❑ 32000085-001 Water-tight Cable Gland/Strain-relief Fitting (10 pack).
- ❑ 32003036-001 Weather Enclosure.
- ❑ 32004254-002 Self-Centering Shaft Adapter (supplied with actuator).
- ❑ 50001194-001 Foot Mount Kit.
- ❑ 50005859-001 NEMA4/4X Enclosure.
- ❑ 50006427-001 Anti-Rotation Bracket (supplied with actuator).
- ❑ SW2-US Auxiliary Switch Package.
- ❑ See also Form 63-2620.

Table 1. Model Selection (MS Series)

M	Electrical Motor
S	Fail Safe Function (Spring Return)
41	120 Vac Two-Position Control; Reversible Mount
75	24 Vac Modulating and Floating Control; Reversible Mount
81	24 Vac Two-Position Control; Reversible Mount
20	175 lb-in. (20 Nm)
A	Standard U.S. Model
B	Standard European Model
E	Selectable control signal; Adjustable zero and span; Includes service and auto-adapt modes
H	
1	No Feedback
2	Voltage Feedback Signal
0	No End Switches
2	Two End Switches
XX	System Controlled Numbers

M S 75 20 A 2 0 XX

Table 2. Model Selection (S20 Series)

S	Spring Return Fail Safe Mode
20	175 lb-in. (20 Nm)
24-2POS	24 Vac Two-Position Control
120-2POS	120 Vac Two-Position Control
230-2POS	230 Vac Two-Position Control
010	24 Vac Modulating and Floating Control
	Fixed Zero/Span, No End Switches
-SW2	Internal End Switches
-SER^a	Enhanced Modulating; Adjustable Zero/ Span

S 20 24-2POS -SW2

^a Enhanced models include two internal end switches.

By using this Honeywell literature, you agree that Honeywell will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Honeywell, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.

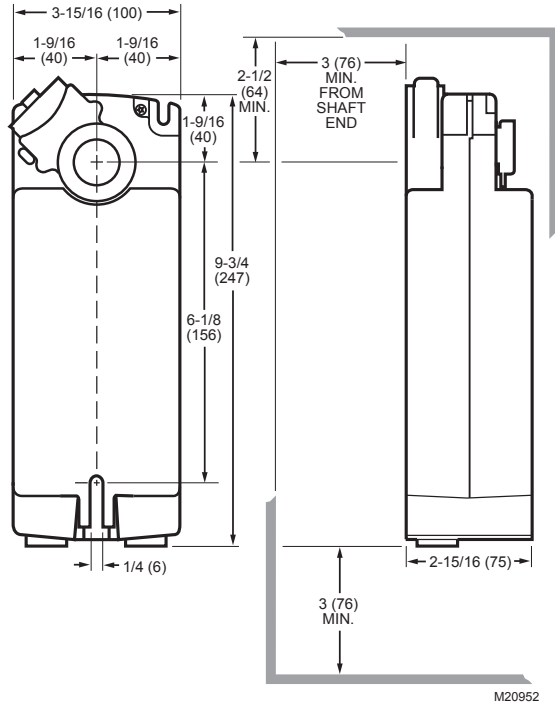


Fig. 1. Dimensional drawing of actuator in in. (mm).

TYPICAL SPECIFICATION

Spring return actuators shall be direct coupled type requiring neither crankarm nor linkage and be capable of direct mounting to a jackshaft of up to 1.05 in. diameter. The actuator shall connect to the shaft using a removable output hub with a self-centering shaft coupling. This coupling shall provide concentric mounting and include an integral adjustable range-stop mechanism.

The actuator shall provide two-position, floating, or proportional control. Proportional control refers to direct acceptance of 0-10 Vdc, 2-10 Vdc or—with addition of a 500 ohm resistor—a 4-20 mA input signal. Proportional and floating control models provide a 2-10 Vdc feedback signal. Actuators shall provide wiring terminals located within an integral access cover with conduit connections. Proportional and floating actuators shall have a rotation direction control switch accessible on the cover. Proportional and floating actuators shall use a brushless DC submotor. Two-position actuators shall use a brush DC submotor with a microprocessor control protected from overload at all angles of rotation.

All spring return actuators must be designed for either clockwise or counterclockwise fail-safe operation with a continuously engaged mechanical return spring. This spring must return the actuator to a fail-safe position within 20 seconds of power loss. All actuators shall provide a means of manually positioning the output hub in the absence of power. All actuators shall be designed for a minimum of 50,000 full-stroke cycles at actuator rated torque and temperature, 50,000 spring-return cycles and 1,500,000 repositions as documented in the product literature. Run time shall be constant and independent of: load, temperature, and supply voltage (within specifications). All actuators shall be UL873 and cUL (CSA22.2) listed, have a five year warranty, and be manufactured under ISO 9001 International Quality Control Standards.

Actuators shall be as manufactured by Honeywell.

Table 3. Electrical Ratings.

Model(s)	Power Input		Power Consumption (VA)	
	Voltage	Frequency	Driving	Holding
Floating, Modulating	24 Vac ±20% (Class 2), 24 Vdc	50/60 Hz.	16	5
Two-Position, Low-voltage	24 Vac ±20% (Class 2), 24 Vdc	50/60 Hz.	40	8
Two-Position, Line-voltage	100-250 Vac	50/60 Hz.	60	13

Automation and Control Solutions

Honeywell International Inc.

Application

The Series 70 industrial grade electric actuator is for on/off or modulating control in a compact and low profile housing to minimize space requirements.

PERFORMANCE

Output Torque	See Motor Charts
Voltages	See Motor Charts
Ambient Temperature	-20°F to 150°F (-29°C to 65°C)
Motor Insulation	120/220 VAC: Class F, 311°F (155°C) Thermal trip at 275°F (135°C) 24V: Class B, slow blow fuse 5A@250VAC
Continuous Duty	Will operate continuously at a max. ambient temperature of 104°F (40°C)
Intermittent Duty (25%)	One motor-on period followed by three motor-off periods
Manual Operation	Pull to engage, push to disengage
Enclosure	Designed to meet NEMA 4, 4X, and IP65 specifications
Certifications	UL, CSA, and CE approve (most models)

CONSTRUCTION

Housing	ASTM B85 pressure die cast aluminum Polyester powder coated
Exposed Fasteners	Stainless steel
Travel Stops	Externally adjustable at both 0 and 90 degrees
Conduit Entries	S70-003 to -006: 2 x 1/2"NPT S70-008 to -180: 2 x 3/4"NPT
Worm Gearing	Worm: Chromoly, self-locking Worm gear: Aluminum bronze
Spur Gearing	AGMA class 9, nitride hardened alloy steel
Bearings	Indicator shaft and motor gear: Permanently sealed ball bearing Worm shaft: Sintered bronze bushing with heavy duty thrust bearing
Lubrication	High temperature synthetic grease
Motor	120/220 VAC: Single phase, reversible, permanent split capacitor induction motor 24V: Permanent magnet-brush DC motor
Capacitor	120/220 VAC: Metalized polyester
Heater	5 watt PTC style
Terminal Strip	Switch plate: 12-22 AWG (2.0 - 0.65mm) Servo: 14-24 AWG (1.63 - 0.51mm)
Limit Switches	SPDT: 120VAC – 10A – 1/3 HP 220VAC – 10A – 1/2 HP 250VDC – 1/4A 12VDC – 2A

TORQUE AND MOTOR DATA

		S70-003	S70-006	S70-008	S70-012	S70-020	S70-030	S70-050	S70-065	S70-130	S70-180
Torque	lb-in	300	600	800	1200	2000	3000	5000	6500	13000	18000
	Nm	34	68	90	136	226	339	565	734	1469	2034
Actuator Weight	lbs	11	11	25	25	25	45	45	45	118	118
	kg	5	5	11	11	11	20	20	20	54	54


MANUAL OVERRIDE

		S70-003	S70-006	S70-008	S70-012	S70-020	S70-030	S70-050	S70-065	S70-130	S70-180
Handwheel Dia.	in	3.5	3.5	8	8	8	12	12	12	12	12
	mm	89	89	203	203	203	300	300	300	300	300
Gear Ratio		30:1	30:1	30:1	30:1	30:1	30:1	30:1	30:1	90:1	90:1
Rim Pull	lbs	16	32	18	28	46	37	62	80	80	80
	kg	7.2	14.5	8.2	12.7	20.8	16.8	28.1	36.3	36.3	36.3

SPEED AND AMPS

Travel Time 60HZ (sec)	Voltage	Current Draw in Amps																			
		FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA
30	120VAC	.60	1.00	.80	1.00	.60	2.10	.78	2.10	1.00	2.10	1.20	3.00	1.60	3.00	2.30	3.10	-	-	-	-
110	120VAC	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.30	3.10	2.50	3.10
30	220VAC	.60	.75	.65	.75	.38	.90	.45	.90	.50	.81	.75	1.20	.90	1.40	1.10	1.40	-	-	-	-
110	220VAC	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.30	2.70	1.50	2.70
60	24VAC	-	-	1.80	-	-	-	-	-	2.00	-	-	-	4.00	-	-	-	-	-	-	-
40	24VDC	-	-	1.80	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
60	24VDC	-	-	-	-	-	-	-	-	2.00	-	-	-	4.00	-	-	-	-	-	-	-



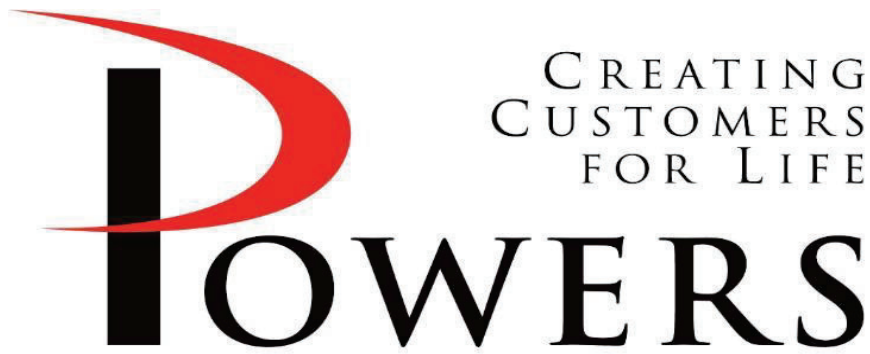

SUBMITTAL

PRODUCT	Louvers
MANUFACTURER	Pottorff
JOB NAME	UAMS Center for Animal Models of Infection & Disease
LOCATION	Little Rock, AR
ENGINEER	James R. Beecher
CONTRACTOR	Middleton Inc.
DATE	10/16/2024
SUBMITTED BY	Chris Atwood

5440 Northshore Drive - North Little Rock, Arkansas 72118 - Tel: 501.374.5420 Fax: 501.370.9298

Submittal

Model ECV-545


Extruded aluminum louver, 5" deep, 45 degree vertical blade

General construction

- Dimensions:** Nominal (approximately 1/2" (12) undersized)
- Material:** 6063-T6 extruded aluminum
- Material thickness (in):** 0.081
- Frame:** 5" deep channel
- Blade orientation:** Right (standard)
- Flange type:** No flange
- Blade:** 45° chevron style

Options

- Screen 1 configuration:** Material: Aluminum; Type: Bird screen; Pattern: 3/4" x 0.050"
- Screen 1 finish:** Match louver
- Installation hardware:** Continuous angles
- Finish:** Baked enamel, Standard color name: TBD
- Finish warranty:** 5 years
- Sill flashing:** Closed end
- Sill flashing depth:** 5"

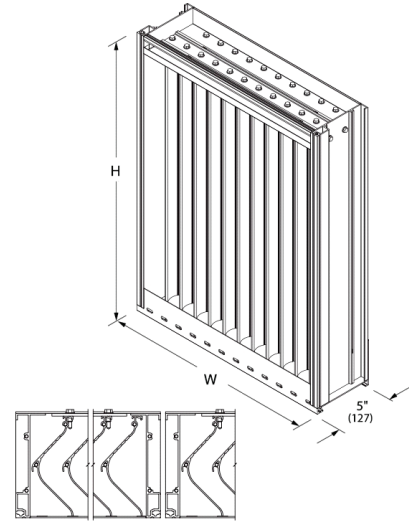

Model ECV-545

Ratings

- Free area:** [48" x 48" (1219 x 1219) unit]: 8.7 ft² (0.81 m²) 54.8% (1 side)
- Velocity @ 0.15 in.wg. Pressure Loss:** 912 fpm (4.63 m/s)
- Std. Design Load:** 130 psf

Listings

- AMCA CRP Listing:** 'Air, Water, Wind'
- AMCA:** 540 (impact resistant), 550 (high velocity rain resistant)

Performance at beginning point of water penetration

- Free area velocity:** 1250 fpm (6.35 m/s)
- Air volume delivered:** 10963 cfm (5.17 m³/s)
- Pressure loss:** 0.28 in.wg. (70 Pa)

Wind Driven Rain Performance – AMCA 500-L [29 mph, 3 in/hr]

- Airflow and core velocity:** 10601 CFM; 985 FPM
- Effectiveness Ratio (%):** 100
- Wind class:** A (effectiveness, 1.000 to 0.99)

Wind Driven Rain Performance – AMCA 500-L [50 mph, 8 in/hr]

- Airflow and core velocity:** 10605 CFM; 985 FPM
- Effectiveness Ratio (%):** 99.7
- Wind class:** A (effectiveness, 1.000 to 0.99)

Details

Line item	Tag	Qty	Louver size (in.xxxx)	Sections	Ratings			Free area		Approx. weight (lbs)
			W x H	Wide x High	CFM	FPM	PD (in.w.g.)	ft ²	%	
16	LOUVER L-1	1	120 x 48	2 x 1				21.85	55.4	220

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Note that performance data in the details section of this submittal are calculated values, and are not AMCA certified.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

Submittal

Model ECV-545

Extruded aluminum louver, 5" deep, 45 degree vertical blade

General construction

- Dimensions:** Nominal (approximately 1/2" (12) undersized)
- Material:** 6063-T6 extruded aluminum
- Material thickness (in):** 0.081
- Frame:** 5" deep channel
- Blade orientation:** Right (standard)
- Flange type:** No flange
- Blade:** 45° chevron style
- Screen 1 configuration:** Material: Aluminum; Type: Bird screen; Pattern: 1/2" x 0.063"

Options

- Screen 1 finish:** Match louver
- Installation hardware:** Continuous angles
- Finish:** Baked enamel, Standard color name: TBD
- Finish warranty:** 5 years

Ratings

- Free area:** [48" x 48" (1219 x 1219) unit]: 8.7 ft² (0.81 m²) 54.8% (1 side)
- Velocity @ 0.15 in.wg. Pressure Loss:** 912 fpm (4.63 m/s)
- Std. Design Load:** 130 psf

Listings

- AMCA CRP Listing:** 'Air, Water, Wind'
- AMCA:** 540 (impact resistant), 550 (high velocity rain resistant)

Performance at beginning point of water penetration

- Free area velocity:** 1250 fpm (6.35 m/s)
- Air volume delivered:** 10963 cfm (5.17 m³/s)
- Pressure loss:** 0.28 in.wg. (70 Pa)

Wind Driven Rain Performance – AMCA 500-L [29 mph, 3 in/hr]


- Airflow and core velocity::** 10601 CFM; 985 FPM
- Effectiveness Ratio (%):** 100
- Wind class:** A (effectiveness, 1.000 to 0.99)

Wind Driven Rain Performance – AMCA 500-L [50 mph, 8 in/hr]

- Airflow and core velocity::** 10605 CFM; 985 FPM
- Effectiveness Ratio (%):** 99.7
- Wind class:** A (effectiveness, 1.000 to 0.99)

Details

Line item	Tag	Qty	Louver size (in.xxxx)	Sections	Ratings			Free area		Approx. weight (lbs)
			W x H	Wide x High	CFM	FPM	PD (in.w.g.)	ft ²	%	
17	LOUVER L-2	1	30 x 56	1 x 1				6.03	53	66

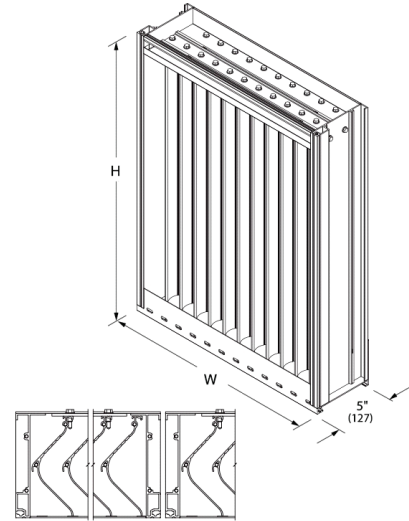

Model ECV-545


This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Note that performance data in the details section of this submittal are calculated values, and are not AMCA certified.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

Submittal Model ECV-545 Performance

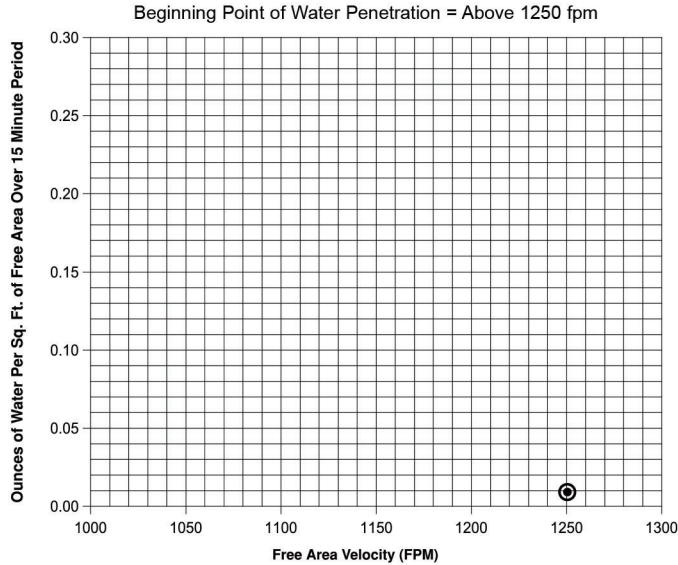

AMCA 540, and AMCA 550


Water penetration

AMCA defines the beginning point of water penetration as the free area velocity at the intersection of a simple linear regression of test data and the line of 0.01 ounces of water per square foot of free area and is measured through a 48" x 48" louver during a 15 minute period. The AMCA water penetration test provides a method for comparing louver models and designs as to their efficiency in resisting the penetration of rainfall under specific lab conditions. Pottorff recommends that intake louvers are selected with a reasonable margin of safety below the beginning point of water penetration in order to avoid unwanted penetration during severe storm conditions.

This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

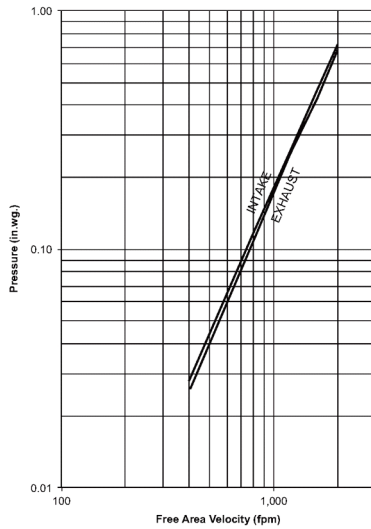

Pressure loss

Louver test size = 48" x 48" (1219 x 1219)



Certified Ratings:

Pottorff certifies that the model ECV-545 shown herein is licensed to bear the AMCA seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings seal applies to air performance, water penetration, and wind driven rain ratings.




















This submittal sheet reflects only the construction and options selected and is not indicative of all constructions and options that are available for the product. For more information, please contact your local representative or visit us at www.pottorff.com.

Information is subject to change without notice or obligation.

Note: Dimensions in parentheses () are millimeters.

(FROM DRYWALL)

Standard Finish colors for aluminum products and acoustical louvers

				
Apollo White M-18136 M-19136	Bone White M-18137 M-19137	Colonial White M-18138 M-19138	Ivory M-18162 M-19162	Sandstone M-18139 M-19139
				
Nantucket Dune M-18140 M-19140	Beige M-18141 M-19141	Seawolf M-18142 M-19142	Fashion Gray M-18143 M-19143	Colonial Gray M-18144 M-19144
				
Charcoal Gray M-18145 M-19145	Light Blue M-18146 M-19146	Interstate Blue M-18147 M-19147	Aged Copper M-18148 M-19148	Hartford Green M-18149 M-19149
				
Brick Red M-18150 M-19150	Burgundy M-18151 M-19151	Sage Brown M-18152 M-19152	Statuary Bronze M-18153 M-19153	Black M-18154 M-19154

The first M number is for the standard Fluoropolymer finish and the second number is for the same color in Polyester.

Premium Pearl finish colors for aluminum products and acoustical louvers

				
El Cajon Silver M-18155 M-19155	Champagne M-18156 M-19156	Light Bronze M-18157 M-19157	Medium Bronze M-18158 M-19158	Dark Bronze M-18159 M-19159

Premium Pearl colors use mica pigments to simulate the appearance of anodized finishes. The first M number is for the standard Fluoropolymer finish and the second number is for the same color in Polyester.

The color swatches shown are not the actual paint. The swatches are as close as possible to actual colors offered. Actual swatch samples are available upon request.

Our superior performance paint systems are available in a wide range of colors and we can also custom color match to any of your specifications. Our expertise in applying architectural coatings assures you of a high quality finish. With our color options, you get the color you need when you need it!

PRODUCT FACTS

Finish Type	Description/Application	Color Selection	Warranty
Fluoropolymer Decafon and Newlar meet AAMA 2605. Dry film thickness 2 mil. equivalent to Kynar 500®/Hylar 5000®, Duranar®, Fluoropon®	Our premier finish for extruded aluminum. Tough, long lasting, environmentally friendly powder coating has superior color retention and abrasive properties. Resists chalking, fading, chemical abrasion and weathering.	Standard Colors: 20 standard colors plus Premium Pearl finishes. Custom colors are available. Consult factory.	10 Years (consult factory for availability of extended warranty up to 20 years).
Polyester Powder Coat meets AAMA 2604 dry film thickness 2 mil. equivalent to Baked Enamel.	Environmentally friendly powder coating has good color retention and abrasive properties. Resists chalking, fading, chemical abrasion and weathering.	20 standard colors for aluminum products and acoustical louvers, 18 colors for steel. Custom colors are available. Consult factory.	5 Years
Integral Color Anodize AA-M10C22A42 (>0.7 mil)	Electrochemically deposited inorganic color pigment which is sealed to convert an aluminum oxidation into a corrosion resistant finish. Some shade variation will occur.	Champagne; Light, Medium or Dark Bronze; Black	5 Years
Clear Anodize 215 R-1 AA-M10C22A41 (>0.7 mil)	Electrochemically oxidized aluminum surface for uniform clear finish. More resistant to natural oxidizing. Improved luster and less glossy than mill finish.	Clear	5 Years
Alkyd Prime Coat	Preparation for field applied epoxy, vinyl, urethane, or other heavy-duty coatings. Must be finished within 6 months of application. Contamination can occur in transit and in the field; requires field cleaning prior to painting.	N/A	N/A
Mill	Aluminum or Galvanized Steel. Normal weathering will occur.	N/A	N/A



Finishes enhance louver appearance by matching or contrasting with adjacent surfaces and extending weather resistance. Color matching is available upon request.