



Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.
P.O. Box 16620
Little Rock, AR 72231
Phone 501-834-3320
Fax 501-834-5416

Date: 3/26/2025
Return Request: 4/6/2025
Project: UAMS (CAMID)
Supplier: Comfort Systems USA (Arkansas), Inc.
Manufacturer: ACS
Submittal: HVAC Hangers & Supports
Submittal Number: 22 05 29-02
Drawing # and Installation: Mechanical Drawings

ARCHITECT

Clark Kenerssen
2020 Baltimore Avenue, Suite 300
Kansas City, MO 64108
816-474-8237

ENGINEER

Clark Kenerssen
2020 Baltimore Avenue, Suite 300
Kansas City, MO 64108
816-474-8237

GENERAL CONTRACTOR

CDI Contractirs
3000 Cantrell Rd.
Little Rock, AR 72202
501-666-4300

MECHANICAL SUBCONTRACTOR

Comfort Systems USA (Arkansas), Inc.
9924 Landers Rd.
N. Little Rock, AR 72117
501-834-3320

Notes:

--

CSUSA PROJECT NO.

22-6069

sean@comfortar.com

9924 Landers Rd.
No. Little Rock, AR 72117



THERMAFIBER® FIRE & SOUND GUARD® PLUS MINERAL WOOL INSULATION

Thermafiber® Fire & Sound Guard® Plus mineral wool insulation is designed to provide excellent thermal, noise control, and fire resistance in residential and light commercial construction applications. Fire & Sound Guard® Plus can be used in a variety of applications, including interior and exterior walls, ceilings, basement walls, and crawl spaces. These products are non-combustible, moisture-resistant, non-corrosive, non-deteriorating, and mold-resistant.¹

¹ Tested per ASTM C1338, Standard Test Method for Determining Fungi Resistance of Insulation Materials and Facings, ASTM International.



Features

- Designed for interior and exterior wall applications
- Energy-saving thermal insulation²
- Exceptional sound and noise absorption
- Fire-resistant
- Easy to install

² Savings vary. Find out why in the seller's fact sheet on R-values. Higher R-values mean greater insulating power.

Standards, Codes Compliance

- NFPA 101, Class A-rated interior finish
- ASTM C665, Mineral Fiber Thermal Insulation for Buildings, Type 1 Compliant

Physical Properties

PROPERTY	TEST METHOD	VALUE
Corrosion of Steel, Aluminum, and Copper	ASTM C665	Complies
Non-Combustibility	ASTM E136	Complies
Non-Combustibility	CAN/ULC S114	Complies
Water Vapor Permeance	ASTM E96	Unfaced, 50 perms as tested
Water Vapor Sorption	ASTM C1104	Sorption less than 1% by volume
Surface Burning Characteristics	ASTM E84	Unfaced, Flame Spread 0, Smoke Developed 0
Surface Burning Characteristics	CAN/ULC S102	Unfaced, Flame Spread 0, Smoke Developed 0
Fungi Resistance	ASTM C1338	Complies

Installation

- **Measure & cut** — Fire & Sound Guard® Plus insulation is easy to cut with a serrated knife for custom fitting around electrical boxes, pipes, duct-work, wiring, or between non-standard studs and joists.
- **Squeeze & insert** — Fire & Sound Guard® Plus insulation is flexible and pliable; simply squeeze the sides to compress the insulation and insert into the desired wall.
- **Release & expand** — Once in place, Fire & Sound Guard® Plus insulation naturally expands to fill in the space, creating a snug, custom fit.

Availability

	R-VALUE ³	SIZES	PIECE/BAG	SQ FT./BAG
Wood Stud Applications	R-11	3" x 15" x 47"	10	48.96
		3" x 23" x 47"	8	60.06
	R-13	3.5" x 15" x 47"	8	39.20
		3.5" x 23" x 47"	8	60.06
	R-15	3.5" x 15" x 47"	8	39.20
		3.5" x 23" x 47"	8	60.06
	R-21	5.5" x 15" x 47"	6	29.37
		5.5" x 23" x 47"	6	45.04
	R-23	5.5" x 15" x 47"	5	24.48
		5.5" x 23" x 47"	5	37.53
	R-30	7.1" x 15" x 47"	3	14.70
		7.1" x 23" x 47"	3	22.50
Steel Stud Applications	R-10	2.5" x 16" x 48"	8	42.70
		2.5" x 24" x 48"	8	64.00
	R-11	3" x 16" x 48"	10	53.33
		3" x 24" x 48"	8	64.00
	R-13	3.5" x 16" x 48"	8	42.67
		3.5" x 24" x 48"	8	64.00
	R-15	3.5" x 16" x 48"	8	42.67
		3.5" x 24" x 48"	8	64.00
	R-21	5.5" x 16" x 48"	6	32.00
		5.5" x 24" x 48"	6	48.00
	R-24	6" x 16" x 48"	4	21.30
		6" x 24" x 48"	4	32.00

3 R-value is a measure of insulating ability. "R" means resistance to heat flow. The higher the "R" value, the greater the insulation power.

Product Options

- Available in standard widths for both wood and steel stud framing.
- Recycled Content Options⁴:
- EPA Choice Fiber (U.S. Government Buildings)..... Minimum 75%
 - Standard Fiber70%

Formaldehyde-free product available. See Owens Corning publication "Thermafiber® Fire & Sound Guard® Plus Formaldehyde-Free Mineral Wool Insulation Data Sheet" (Pub. No. 10025220) for more information.

4 Recycled content options other than standard must be specified at time of order.

Acoustical Performance

PRODUCT	THICKNESS	COEFFICIENTS AT FREQUENCIES PER ASTM C423						
		125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	NRC
R-10	2.5"	0.33	1.05	1.24	1.16	1.07	1.01	1.15
R-11	3"	0.51	0.99	1.18	1.03	0.99	0.96	1.05
R-13	3.5"	0.39	1.15	1.22	1.13	1.07	1.01	1.15
R-15	3.5"	0.51	1.28	1.21	1.13	1.07	1.03	1.15
R-21	5.5"	0.76	1.33	1.17	1.11	1.04	1.01	1.15
R-23	5.5"	0.71	1.26	1.14	1.10	1.04	1.02	1.15
R-24	6.0"	0.74	1.19	1.10	1.12	1.06	1.05	1.10
R-30	7.125"	0.79	1.15	1.15	1.10	1.07	1.04	1.10

Environmental and Sustainability

Owens Corning is a worldwide leader in building material systems, insulation, and composite solutions, delivering a broad range of high-quality products and services. Owens Corning is committed to driving sustainability by delivering solutions, transforming markets, and enhancing lives. More information can be found at www.owenscorning.com.

Certifications and Sustainable Features

- Verified by ICC-ES to contain a minimum of 70% recycled content. See ICC-ES Evaluation Report VAR-1025 at icc-es.org.
- Environmental Product Declaration (EPD) has been certified by UL Environment. For more information, visit ul.com/epd.
- Fire & Sound Guard(R) Plus products have a published Health Product Declaration (HPD).



Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein. Owens Corning reserves the right to modify this document without prior notice.

LEED® is a registered trademark of the U.S. Green Building Council.

Notes

For additional information, refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via <http://sds.owenscorning.com>.

THERMAFIBER, INC.
ONE OWENS CORNING PARKWAY
TOLEDO, OH 43659 USA
888-TFIBER1 [834-2371]
www.owenscorning.com/thermafiber

3M™ Fire Barrier Moldable Putty Stix MP+

Product Data Sheet

1. Product Description

3M™ Fire Barrier Moldable Putty Stix MP+ is a one-part, ready-to-use intumescent firestop containing a synthetic elastomer. The intumescent property of this material allows 3M™ Fire Barrier Moldable Putty Stix MP+ to expand and help maintain a firestop penetration seal for up to 4 hours in the event of a fire. It is often used to fill voids in large openings and/or complex firestop systems due to its moldability, re-enterability and smoke-seal properties (provides a draft and cold smoke seal for systems with L-Ratings).

3M™ Fire Barrier Moldable Putty Stix MP+ firestops penetrations passing through fire-rated floor, floor/ceiling or wall assemblies and blank openings. In addition to excellent thermal- and fire-resistance properties, 3M™ Fire Barrier Moldable Putty Stix MP+ helps minimize sound transmission through assemblies requiring an STC rating. 3M™ Fire Barrier Moldable Putty Stix MP+ is easily moldable by hand and exhibits excellent adhesion to a full range of construction substrates and penetrants.



Moldable through penetration firestop with excellent smoke-seal capability.

Available in the following colors: ■ Dark Red

Product Features

- Firestop tested up to 4 hours in accordance with ASTM E 814 (UL 1479) & CAN/ULC S115
- Provides draft and cold smoke seal (L-rating)
- Pliable and conformable—molds easily into required shape
- Helps reduce noise transfer*
- Will not dry out or crumble
- Excellent adhesion
- Re-enterable/repairable
- Low VOC**
- Halogen-free and solvent-free formula
- Excellent aging properties
- Red color recognized as a firestop

*Minimizes noise transfer — STC-Rating of 52 when tested in STC 53-rated wall assembly.
**Complies with the intent of LEED® NC-EQ Credit 4.1 for Low-Emitting Materials: Adhesives and Sealants, contains <250 g/L VOC contents (less H₂O and exempt solvents per SCAQMD Rule 1168).

2. Applications

Typically used to seal gaps between cables in multiple penetrations and to firestop cable bundles, insulated pipe, electrical conduit, metal pipe and other through penetrations. Cable types covered include telephone, power/control and fiber optic inner duct. Also available in pad form as 3M™ Fire Barrier Moldable Putty Pads MPP+, which are ideal for protecting electrical box outlets. For more information visit our product catalog at www.3M.com/firestop.

3. Specifications

3M™ Fire Barrier Moldable Putty Stix MP+ shall be a one component, ready-to-use, intumescent elastomer capable of expanding a minimum of 3 times at 1000°F. The material shall be thixotropic and shall be applicable to overhead, vertical and horizontal firestops. Under normal conditions, 3M™ Fire Barrier Moldable Putty Stix MP+ shall be noncorrosive to metal and compatible with synthetic cable jackets. The putty shall be listed by independent test agencies such as UL, ULC, Intertek or FM. 3M™ Fire Barrier Moldable Putty Stix MP+ shall be tested to and pass the criteria of ASTM E 814 (UL 1479) Standard Test Method for Fire Tests of Penetration Firestop Systems and CAN/ULC S115 Standard Method of Fire Tests of Firestop Systems. 3M™ Fire Barrier Moldable Putty Stix MP+ meets the requirements of the IBC, NFPA 5000, NEC (NFPA 70), NFPA 101 and NBCC.

Typically Specified MasterFormat (2004)

Section 07 84 00 – Firestopping

Related Sections

Section 07 84 16 – Annular Space Protection

Section 07 86 00 – Smoke Seals

Section 07 87 00 – Smoke Containment Barriers

Section 07 27 00 – Thermal and Moisture Protection Firestopping

Section 21 00 00 – Fire Suppression



FILL, VOID, OR CAVITY
FOR USE IN THROUGH-PENETRATION
FIRESTOP SYSTEMS
SEE UL FIRE RESISTANCE DIRECTORY
90G9



LISTED
FILL, VOID OR CAVITY
MATERIALS
90G9



Intertek
FIRESTOP SYSTEMS
SEE INTERTEK DIRECTORY



SUBJECT TO THE CONDITIONS OF APPROVAL
AS A WALL & FLOOR PENETRATION
FIRESTOP WHEN INSTALLED AS DESCRIBED
IN THE CURRENT EDITION OF THE FMRC
APPROVAL GUIDE



4. Performance & Typical Physical Properties

Color:	Dark Red	STC:	52 when tested in STC 53 (ASTM E 90, ASTM E 413)
Nominal Density:	10–12 lbs./gal. (1.2–1.45 kg/l)	VOC Less H₂O and Exempt Solvents:	< 250 g/L
Surface Burning: (ASTM E 84)	Flame Spread 0 Smoke Development 0		
Heat Expansion:	Begins @ 350°F (177°C), Significant @ 400°F (204°C) Free Expansion is Nominal 3 times		
Large Stix Retail Stix	Appx. Dimensions: 1.5 in. dia. x 11.5 in. (38mm dia. x 292mm) 1.45 in. dia. x 6 in. (36.8mm dia. x 152.4mm)	Appx. Unit Volume: 20.3 cu. in. (331.6 cu. cm.) 9.9 cu. in. (161.9 cu. cm)	Min. Unit weight: 13.6 oz (385g) 6.4 oz (183g)

5. Packaging, Storage, Shelf Life

Packaging:	1.5 in. dia. x 11.5 in. (38mm x 292mm) stix in cardboard box, individually wrapped in liner (10 stix/case) and 1.45 in. dia. x 6 in. (36.8mm x 152.4mm) individually packed in recloseable cardboard tube (retail package, 1 stix/tube).
Storage:	3M™ Fire Barrier Moldable Putty Stix MP+ should be stored indoors in dry conditions.
Shelf Life:	3M™ Fire Barrier Moldable Putty Stix MP+ shelf life is indefinite in original unopened containers. Product will not dry or crumble in opened containers. Normal stock and stock rotation practices are recommended.

6. Installation Techniques

Consult a 3M Authorized Fire Protection Products Distributor / Dealer or Sales Representative for Applicable UL, Intertek or other third-party drawings and system details.

Preparatory Work:	The surface of the opening and any penetrating items should be cleaned (i.e. free of dust, grease, oil, loose materials, rust or other substances) to allow for the proper adhesion of the 3M™ Fire Barrier Moldable Putty Stix MP+. Ensure that the surface of the substrates are not wet and are frost free.
Installation Details:	<p>Moldable Putty MP+ can be used as a primary firestopping sealant, or as a secondary product in conjunction with other 3M Fire Protection Products such as 3M™ Fire Barrier Pillows, 3M™ Fire Barrier Composite Sheet CS-195+, 3M™ Fire Barrier Pass-Through Devices or the 3M™ Fire Barrier Putty Sleeve Kit.</p> <p>An example of how the putty is to be installed when it is the sole product in a metallic pipe penetrations comes from UL System C-AJ-1027 “Moldable putty material kneaded by hand and applied to fill annular space to a minimum depth of 1 in. (25.4 mm), flush with top surface of floor. In wall assemblies, required putty thickness to be installed symmetrically on both sides of wall.”</p> <p>When used with 3M™ Fire Barrier Pillows, UL systems typically require the putty to be installed “within annulus at all corners of opening and extending a minimum 1 in. (24.5mm) in both directions from each corner, flush with top surface of floor or both surfaces of wall.” Any voids between pillows should be filled with a minimum 1 in. (24.5mm) depth of putty.</p> <p>In the case of cable tray applications, there are additional requirements for the application of putty such as installing the putty between the bottom of the cable tray and bottom of opening. Likewise, putty (or another system-approved sealant) is required between the top of the cable tray and bottom of composite sheet or pillows.</p> <p>Consult each applicable UL system for specific putty installation requirements.</p>
Limitations:	Note: Over application (i.e. using excessive amount of material) of product to vertical surfaces may cause sagging, follow system details. Product is not impaired by freezing but should be warmed to at least 32°F (0°C) before applying.

7. Maintenance

No maintenance is expected to be required when installed in accordance with the applicable UL, cUL, ULC, Intertek, FM or other third-party listed system. Once installed, if any section of the 3M™ Fire Barrier Moldable Putty MP+ is no longer installed per original system parameters, remove the putty, clean the area, and install the proper thickness per system details ensuring it bonds to the substrate and adjacent putty. If mineral wool was used as backing material, replace with new mineral wool prior to installation of the putty (putty can be reused if it is free from contaminants and can be molded together at new/existing putty overlap).

8. Availability

Description	Color	Size	Unit	Billing UPC Number	Units/Case	Price Unit
Moldable firestop putty stix (large)		1.5" dia. x 11.5"	Stix	50051115-16526-4	10	EA
Moldable firestop putty stix (retail)		1.45" dia. x 6"	Stix	50051115-16561-5	12	EA

For additional technical and purchasing information regarding this and other 3M Fire Protection Products, please call: 1-800-328-1687 or visit www.3M.com/firestop. 3M™ Fire Barrier Moldable Putty Stix MP+ are available from 3M Authorized Fire Protection Products Distributors and Dealers.

9. Safe Handling Information

Consult country-of-use Material Safety Data Sheet (MSDS) prior to handling and disposal.



3M Building and Commercial Services Division

3M Center, Building 223-2N-21
St. Paul, MN 55144-1000 USA
1-800-328-1687
www.3M.com/firestop

Important Notice to User: Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed. **Product Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. **Warranty and Limited Remedy:** 3M warrants that each 3M Fire Protection Product will be free from defects in material and manufacture for 90 days from the date of purchase from 3M's authorized distributor. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If a 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

Please Recycle. Printed in U.S.A. © 3M 2013. All rights reserved.
Reference Number 98-0213-4640-2

3M is a trademark of 3M. Used under license in Canada. LEED is a trademark of U.S. Green Building Council Non-Profit Corporation. All other trademarks are the property of their respective owners.



Document Library
TS Data Sheet 08661;
08662;
08663;
08664

Public

Rev:1

Effective: 05/17/99

Status: Active

Super Silicone Adhesive/Sealants

Data Sheet

3M Part No.(s)	3M Part Descriptor(s)
08661;	- 3 oz. Tube (Clear)
08662;	- 3 oz. Tube (Black)
08663;	- 1/10 Gallon Cartridge (Clear)
08664	- 1/10 Gallon Cartridge (Black)

3M Fax on Demand Identification Number:

Description

3M Super Silicones Adhesive/Sealants are a paste-like, one-component material which cures to a tough, rubbery solid when exposed to moisture in the air. They will adhere to clean metal, glass, wood, ceramic, natural and synthetic fiber, painted surfaces, and many plastics. They are easy to use and exhibit excellent resistance to weathering, vibration, moisture, ozone and extreme temperatures.

Features, Advantages, Benefits

Features

- Fast Curing
- Flexible
- Adhesion to Many Substrates

Advantages

- High Temperature Resistance
- Good Weathering Resistance
- Good Water Resistance

Benefits

Typical Physical Properties

Container	3 oz. tube and 1/10 gallon cartridge
Base	Silicone
Density lbs/Gallon (Appx.)	8.5
Color	Clear & Black

Flash Point - °F	> 250°F
Solids Content (Appx.)	100%
Consistency	Non-Sagging Paste
Service Temperature - °F	-76 to 400

Product Uses

Performance Properties

Cure Characteristics: (Exposed to air at @ 77°F and 50% RH

Tack Free Time:	10-20 Minutes
Cure Thru Time (1/8 inch thickness)	24 Hours

Physical Properties: (Measured on 1/4 inch thick samples cured for 72 Hrs. at 77°F and 50% RH

Hardness, Shore A	25
Tensile Strength	325 PSI
Elongation	550%

Handling and Application Information

Directions for Use

Thoroughly clean surfaces to be bonded. Rubber surfaces should be abraded and wiped clean. Apply silicone to area that is to be sealed or bonded. The paste-like consistency makes it easy to tool with a spatula or wooden paddle. Super Silicones cure from the outside in. At conditions of 75°F and 50% RH, they form a tack free skin within 20 minutes. Tooling is not practical after the skin begins forming. Cure time is affected by humidity, degree of confinement, and thickness of the adhesive/sealant bead. Lower humidity and/or temperature will extend the cure time. Higher humidity and/or temperature will reduce the cure time. In applications where the adhesive/sealant is confined during cure, the time required for proper cure is generally lengthened.

Applications

- Sealing automotive trim
- Sealing drip rails
- Sealing taillight and sunroof assemblies
- Filletting and caulking joints to provide a water and dust barrier
- Sealing vinyl roof top fabrics

Storage and Handling

Store at room temperature. Rotate stock on a "first-in, first-out" basis. When stored at the recommended conditions in original, unopened containers, this product has a shelf life of 18 months.

Precautionary Information

Refer to Product Label and Material Safety Data Sheet for Health and Safety Information before using this product.

Country

US

This document is public. It may be distributed.

Important Notice to Purchaser

The statements and technical information contained in this technical data sheet are based on tests and data which 3M believes to be reliable, but the accuracy or completeness of such statements and technical information is not guaranteed. **3M MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's method of application.

* If 'Directions for Use' reference P.N.'s 8984, 8986, or 8987, please read below.

Federal and local air quality regulations may regulate or prohibit the use of surface preparation and cleanup solvents based on VOC content. Consult your local and Federal air quality regulations for information. When using solvents, use in a well ventilated area. Extinguish all sources of ignition in the work area and observe precautionary measures for handling these materials. Refer to product label and MSDS for P.N. 8984, 8986, or 8987 for detailed precautionary information.

LIMITATION OF REMEDIES AND LIABILITY: If the 3M product is proved to be defective, **THE EXCLUSIVE REMEDY, AT 3M'S OPTION, SHALL BE TO REFUND THE PURCHASE OF OR TO REPAIR OR REPLACE THE DEFECTIVE 3M PRODUCT.**

3M shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.

For Additional Health and Safety Information

See Material Safety Data Sheet (Fax on Demand 1-800-305-0419), or call: **3M Automotive Aftermarket Division** 3M Center, Building 223-6N-01
Phone: 877-MMM-CARS (877-666-2277)

3M Fax on Demand Identification Number

Reference:  Goto Ref

Author:

Tonya L. Frisley/IM-IndMktsGp/3M/US

This is the last page

Pipe

Ordering Information

- When ordering, specify material, gauge (if non-standard), dimension and end styles.
- QF clamp-together Pipe is quick and easy to install, saving time and money on installation.
- Solid welded seams prevent leakage.
- Length is nominal 5'.
- Pipe larger than 24" diameter is flanged and constructed of highly durable 18 gauge material. Flanges are industry standard angle rings.



QF Pipe


Ø in.	Length in.	QF Std Pipe Weight Lbs	AFL Std Pipe Weight Lbs	QF 14ga Pipe Weight Lbs
3	59.25	4.00	5.40	
4	59.25	5.35	7.05	
5	59.25	6.65	9.05	
6	59.25	7.93	10.73	
7	59.06	11.70	15.70	
8	59.06	13.25	17.75	36
9	59.06	14.92	19.92	40
10	58.75	16.60	23.10	44
11	58.75	18.10	25.10	49
12	58.75	19.75	27.75	53
13	58.75	21.40	29.90	57
14	58.75	27.30	36.80	61
15	58.75	29.25	44.25	66
16	58.75	31.15	47.15	70
17	58.75	33.09	49.59	74
18	58.75	34.00	51.00	79
19	58.75	36.00	55.00	83
20	58.75	38.00	57.00	87
21	58.75	40.00	59.5	92
22	58.75	42.00	63.50	96
23	58.75	44.00	65.5	100
24	58.75	45.82	68.82	104
26	59.00		98.56	
28	59.00		118.00	
30	59.00		137.05	
32	59.00		145.94	
34	59.00		154.83	
36	59.00		162.76	
38	59.00		173.47	
40	59.00		182.81	

QF Material Options

Galv				SS			
		Size (inches)				Size (inches)	
Gauges		Min. Ø	Max. Ø	Gauges		Min. Ø	Max. Ø
Standard	22	3	12	Standard	22	3	12
	20	13	24		20	13	24
Optional	18	4	24	Optional	18	8	24
	16	8	24		16	8	24
	14	8	24				

Flanged Material Options

Galv (Std)				SS			
		Size (inches)				Size (inches)	
Gauges		Min. Ø	Max. Ø	Gauges		Min. Ø	Max. Ø
Standard	22	3	12	Standard	22	3	12
	20	13	24		20	13	24
	16	26	40		16	26	40
	14	42	50	Optional	20	4	12
	12	52	72		18	8	24
Optional	20	4	12		16	8	24
	18	4	24				
	16	8	24				
	14	8	50				
	12	10	72				
	10	12	72				

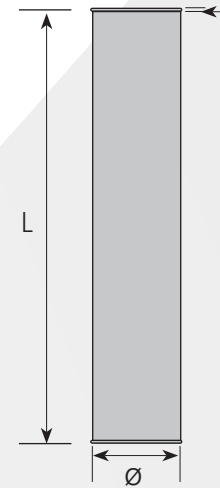

Construction


Seam: Longitudinal seam is laser or plasma welded (laser weld sizes 3" to 24" diameter, plasma weld on larger diameters).

FIGURE 7750 (Standard) & 7751 (Domestic¹) - MSS Compliant Insulation Protection Shields

Finish: G60 Galvanized Coating
 Material: Steel, ASTM 1011 type B
 MSS SP-58, Type 40*
 Federal Specification WW-H-171, Type 41*

* Complies when used within the pipe size, insulation thickness, and compressive strength of insulation as specified by MSS SP-58.


¹ Domestic shields are ordered on demand (SOD)

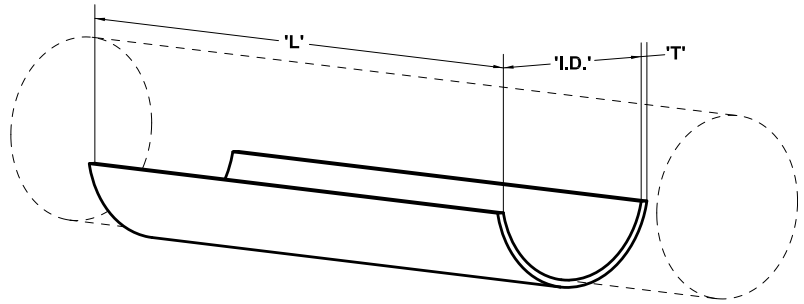

Catalog Number		Shield Size	L		I.D.		T			Required Hanger Size	Weight Lbs.
Standard	Domestic ¹		in.	mm	in.	mm	in.	mm	gauge		
FNW7750Z0150	FNW7751Z0150	1-1/2	12	305	1.91	48.4	0.047	1.2	18	1-1/2"	0.47
FNW7750Z0200	FNW7751Z0200	2	12	305	2.38	60.4	0.047	1.2	18	2"	0.58
FNW7750Z0250	FNW7751Z0250	2-1/2	12	305	2.88	73.2	0.047	1.2	18	2-1/2"	0.71
FNW7750Z0300	FNW7751Z0300	3	12	305	3.50	88.9	0.047	1.2	18	3"	0.86
FNW7750Z0350	FNW7751Z0350	3-1/2	12	305	4.00	101.6	0.047	1.2	18	3-1/2"	0.98
FNW7750Z0400	FNW7751Z0400	4	12	305	4.52	114.7	0.047	1.2	18	4"	1.10
FNW7750Z0450	FNW7751Z0450	4-1/2	12	305	5.00	127.0	0.047	1.2	18	5"	1.28
FNW7750Z0500	FNW7751Z0500	5	12	305	5.31	135.0	0.047	1.2	18	5"	1.38
FNW7750Z0550	FNW7751Z0550	5-1/2	12	305	5.56	141.2	0.047	1.2	18	5"	1.39
FNW7750Z0600	FNW7751Z0600	6	12	305	6.66	169.1	0.059	1.5	16	6"	2.02
FNW7750Z0700	FNW7751Z0700	7	12	305	7.65	194.3	0.059	1.5	16	8"	2.31
FNW7750Z0800	FNW7751Z0800	8	12	305	8.70	220.9	0.059	1.5	16	8"	2.79
FNW7750Z1000	FNW7751Z1000	10	18	458	10.86	275.8	0.059	1.5	16	10"	5.25
FNW7750Z1200	FNW7751Z1200	12	24	610	12.83	326.0	0.071	1.8	15	12"	9.55

FIGURE 7753 - Light Duty Insulation Protection Shields

Material: Carbon Steel, ASTM A653, type A/B
 Finish: G60 Galvanized Coating

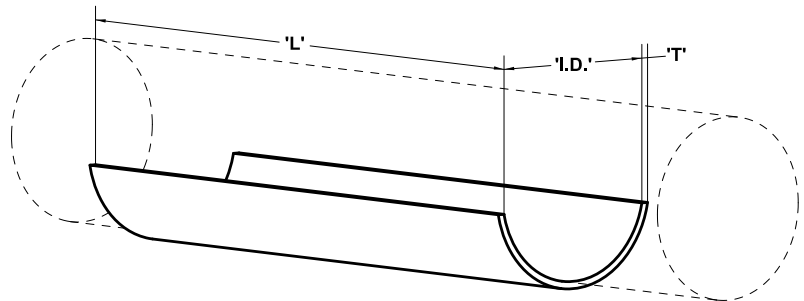

Catalog Number	L		I.D.			T			Required Hanger Size	Weight Lbs.
	in.	mm	in.	mm	± in (mm)	in.	mm	gauge		
FNW7753Z0000	11.9	302	1.90	48.3	0.093 (2.38)	0.024	0.6	24	1-1/2"	0.25
FNW7753Z0001	11.9	302	2.38	60.5	0.093 (2.38)	0.024	0.6	24	2"	0.31
FNW7753Z0002	11.9	302	2.87	72.9	0.093 (2.38)	0.024	0.6	24	2-1/2"	0.38
FNW7753Z0003	12	305	3.50	88.9	0.093 (2.38)	0.047	1.2	18	3"	0.88
FNW7753Z0004	12	305	4.00	101.6	0.093 (2.38)	0.047	1.2	18	3-1/2"	1.01
FNW7753Z0005	12	305	4.50	114.3	0.093 (2.38)	0.047	1.2	18	4"	1.13
FNW7753Z0006	12	305	5.00	127.0	0.125 (3.18)	0.047	1.2	18	5"	1.26
FNW7753Z0007	12	305	5.63	143.0	0.125 (3.18)	0.047	1.2	18	5"	1.40
FNW7753Z0008	12	305	6.62	168.1	0.125 (3.18)	0.047	1.2	18	6"	1.66
FNW7753Z0009	12	305	7.63	193.8	0.250 (6.35)	0.047	1.2	18	8"	1.91
FNW7753Z0010	12	305	8.62	219.0	0.250 (6.35)	0.047	1.2	18	8"	2.16
FNW7753Z0013	12	305	9.63	244.6	0.250 (6.35)	0.047	1.2	18	10"	2.41
FNW7753Z0014	12	305	10.75	273.0	0.250 (6.35)	0.047	1.2	18	10"	2.69
FNW7753Z0015	12	305	11.75	298.5	0.250 (6.35)	0.047	1.2	18	12"	2.94
FNW7753Z0016	12	305	12.75	323.9	0.250 (6.35)	0.047	1.2	18	12"	3.19

Quik-Shield Thermal Hanger Shield Fig. QUIKSHIELD



Description

Quik-Shields are economically priced 180° thermal hanger shields providing a continuous section of insulation and factory applied jacketing meeting ASTM E 96A (maximum 0.02 perm) through a variety of pipe hangers. The jacket extends beyond the galvanized steel shield and beyond the insulation insert for a neat, joint with both the adjoining and the field-applied top insulation. To assure proper support in all situations, high density 450 PSI structural inserts are installed on units for 10" pipe with 1" wall thickness and on all units for 12" pipe and larger. Quik-Shields meet the ASTM E84 Standard Flame Spread -5-, Smoke Developed -5-. Rounded shield corners on all commercial size units.

Dimensions

	1/2" to 1 1/2"	2" to 5"	6" to 8"	10" to 12"	14" to 18"	20" to 24"
Insulation Length	6" 150 mm	6" 150 mm	9" 230 mm	9" 230 mm	12" 300 mm	9" 230 mm
Shield Length	4" 100 mm	4" 100 mm	6" 150 mm	6" 150 mm	10" 250 mm	6" 150 mm
Shield Gauge	22 ga. 0.9 mm	22 ga. 0.9 mm	18 ga. 1.3 mm	18 ga. 1.3 mm	12 ga. 2.8 mm	18 ga. 1.3 mm
Compressive Strength	100 PSI	100 PSI	100 PSI	Cal Sil 100 PSI Insert 450 PSI	Cal Sil 100 PSI Insert 450 PSI	360° Insert 450 PSI

Specifications

Applications:

- For indoor use on flat surfaces, clevis or other band-type hangers.
- Pipe sizes 16 inch and larger in clevis hangers only.
- Chilled to steam piping and dual temperature lines.
- Hanger spans per MSS SP-58 Table A3.
- Available for pipe 1/2 inch through 24 inches.
- Insulation thickness 1/2 inch (to 6" pipe) through 4 inches.

Materials/Construction:

- 100 PSI Calcium silicate meeting ASTM C-533 Type 1, C-585, C-795, E-84, Thermal Conductivity ('k') .40 @ 75° mean.
- Adhesive complying with NFPA 90-A, ASTM E-84
- G-90 Galvanized steel shield, small check per ASTM A-653 (replaces A-527). Rounded corners for safety.
- Factory applied jacketing meeting ASTM E 96A (maximum 0.02 perm), ASTM D-774, D-828 and E-84.
- Structural insert (12" pipe and larger) 450 PSI calcium silicate meeting ASTM C-656 Type II, Grade 5, C-795 and E-84
- All units and components are asbestos free and 100% made and assembled in the U.S.A.



PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	

Quik-Shield Thermal Hanger Shield Fig. QUIKSHIELD

Allowal Loads – Recommended Spans

	Clevis	Trapeze
2 1/2" Pipe	275 lbs. 10 ft. (3.0 m)	145 lbs. 10 ft. (3.0 m)
3" Pipe	340 lbs. 10 ft. (3.0 m)	160 lbs. 10 ft. (3.0 m)
4" Pipe	380 lbs. 10 ft. (3.0 m)	170 lbs. 10 ft. (3.0 m)
6" Pipe	605 lbs. 10 ft. (5.2 m)	330 lbs. 10 ft. (3.0 m)
8" Pipe	800 lbs. 10 ft. (3.0 m)	510 lbs. 10 ft. (3.0 m)
10" Pipe	1,160 lbs. 10 ft. (3.0 m)	830 lbs. 10 ft. (3.0 m)
12" Pipe	1,400 lbs. 10 ft. (3.0 m)	1,175 lbs. 10 ft. (3.0 m)
14" Pipe	1,800 lbs. 10 ft. (3.0 m)	1,250 lbs. 10 ft. (3.0 m)
16" Pipe	2,600 lbs. 10 ft. (3.0 m)	See MaxSpan R.H.
18" Pipe	3,300 lbs. 10 ft. (3.0 m)	See MaxSpan R.H.
20" Pipe	8,000 lbs. 10 ft. (3.0 m)	See MaxSpan R.H.
24" Pipe	9,500 lbs. 10 ft. (3.0 m)	See MaxSpan R.H.

Material Specifications

- Calcium Silicate, 100 PSI Meeting ASTM C-533 Type 1, C-585, C-795 and E-84, Flame Spread -0-, Smoke Developed -0-.
- High Compressive Strength Inserts, 450 PSI, Standard For Pipe 12" and Larger, Meeting ASTM C-656 Type II Grade 5, C-585, C-795, E-72, and E-84, Flame Spread -0-, Smoke Developed -0-. 20" Pipe and larger are 180° of this material.
- Vapor Barrier Jacket of Non-Reactive Polyester Meeting ASTM D-744, D-828, C 1136, E 96 and e 84 Flame Spread -5-, Smoke Developed -5-.
- Adhesive Complying to NFPA 90-A and ASTM E-84, Flame Spread -10-, Smoke Developed -0-.
- Galvanized Steel Shields, G-90 Small Check per ASTM A-653 (Replaces A-527).
- 100% American-Made Components and Construction.
- Asbestos-Free Materials.
- Unit Tested to ASTM E-84. Rated Flame Spread -5-, Smoke Developed -5-.

MODEL SEAL WALL PENETRATION SEAL

MATERIALS OF CONSTRUCTION/DESIGN DATA				
TYPE	SEAL MATERIAL	PRESSURE PLATES	BOLTS & NUTS	TEMPERATURE RANGE (°F)
E	EPDM BLACK	GLASS REINFORCED PLASTIC	STEEL ZINC DICHROMATE	-40 TO +250
ES	EPDM BLACK	GLASS REINFORCED PLASTIC	316 STAINLESS STEEL	-40 TO +250
P	NITRILE BLACK	GLASS REINFORCED PLASTIC	STEEL ZINC DICHROMATE	-40 TO +210
PS	NITRILE BLACK	GLASS REINFORCED PLASTIC	316 STAINLESS STEEL	-40 TO +210
HT	SILICONE GRAY	STEEL ZINC DICHROMATE	STEEL ZINC DICHROMATE	-40 TO +400

NOTE: MAX SEALING PRESSURE OF 20 PSIG AND 40 FT. HEAD

ALL DIMENSIONS ARE IN INCHES

DIMENSIONAL DATA			
MODEL #	FREE STATE THICKNESS	EXPANDED STATE THICKNESS	CHORD LENGTH
MS-200	.50	.62	1.125
MS-275	.62	.78	.910
MS-300	.71	.88	1.510
MS-315	.82	1.03	1.470
MS-325	.94	1.18	3.100
MS-340	1.05	1.33	1.575
MS-360	1.29	1.65	2.106
MS-400	1.43	1.81	3.625
MS-410	1.48	1.91	2.598
MS-425	1.13	1.45	3.625
MS-475	1.62	1.90	2.625
MS-500	2.37	2.81	3.860
MS-525	2.18	2.50	3.860
MS-575	1.81	2.35	3.100
MS-600	3.20	4.00	6.000
MS-650	2.76	3.57	4.160

*FOR SIZING INFORMATION SEE METRASEAL SELECTION CHARTS

[WALL PENETRATION SEALS](#)




NOMINAL PIPE SIZE & TYPE OF PIPE	PIPE O.D.	INNER PIPE THROUGH A CORE DRILLED HOLE			INNER PIPE THROUGH A WALL SLEEVE			NOTES
		HOLE DIA.	MODEL NO./TYPE	QTY. OF LINKS	SLEEVE I.D.	MODEL NO./TYPE	QTY. OF LINKS	

NSF 372 - LEAD FREE
The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.


CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

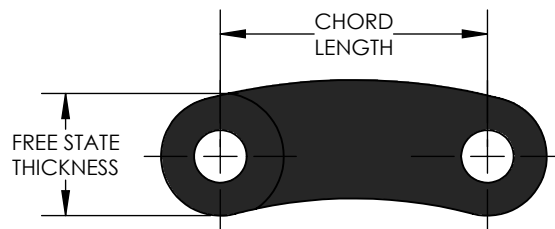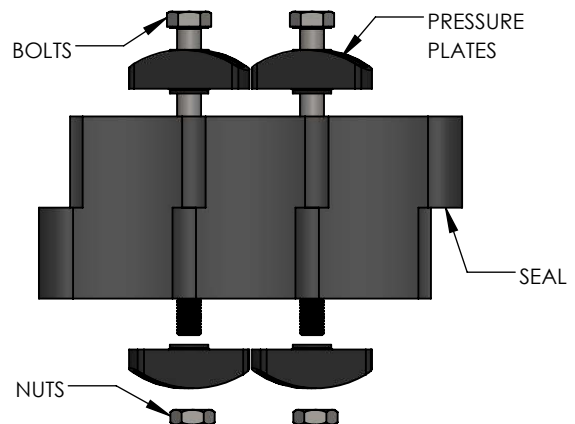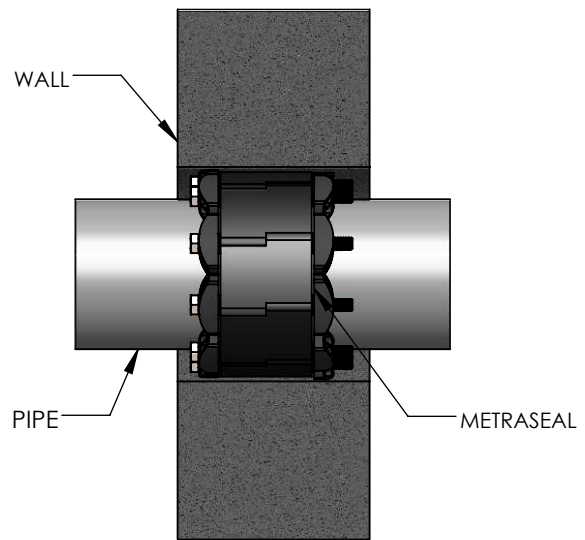

REV. 1	MS-650 ADDED	DATE 12/27/2018
		
2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM		
MODEL SEAL		
WALL PENETRATION SEAL		
DRAWN BY: DKISH	DATE: 5/22/2015	
APPROVED: ZB	DATE: 5/22/2015	
SCALE: N/A	DRAWING NUMBER: SEAL-1	

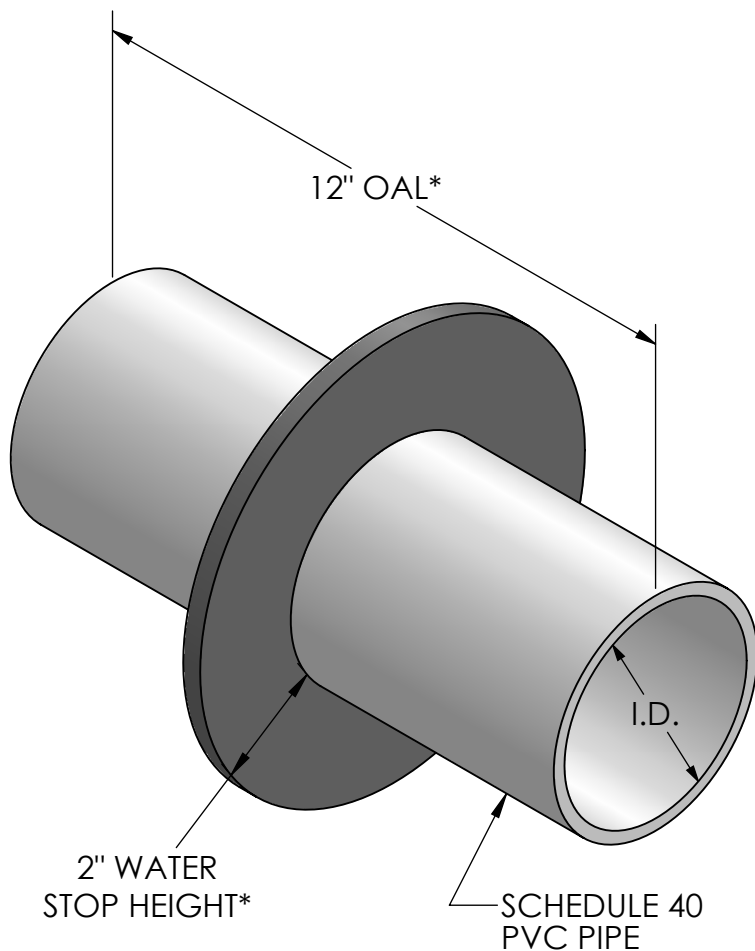


*OPTIONAL LENGTHS AND WATER STOP HEIGHTS ARE AVAILABLE. CONTACT YOUR METRAFLEX REPRESENTATIVE FOR MORE INFORMATION.


PIPE SIZE	ACTUAL I.D.
2"	2.067"
2.5"	2.469"
3"	3.068"
3.5"	3.548"
4"	4.026"
5"	5.047"
6"	6.065"
8"	7.981"
10"	10.02"
12"	12.00"
14"	13.25"
16"	15.25"
18"	17.25"
20"	19.25"
22"	21.25"
24"	23.25"
26"	25.25"
28"	27.25"
30"	29.25"
32"	31.25"
34"	33.25"
36"	35.25"
38"	37.25"
40"	39.25"
42"	41.25"
44"	43.25"
46"	45.25"
48"	47.25"
50"	49.25"
52"	51.25"
54"	53.25"

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV.	DATE	
 <div style="float: right; text-align: right;"> 2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM </div>		
PVC WALL SLEEVE		
DRAWN BY: DKISH		DATE: 7/31/2015
APPROVED:		DATE:
SCALE: N/A	DRAWING NUMBER: WALLSLV	

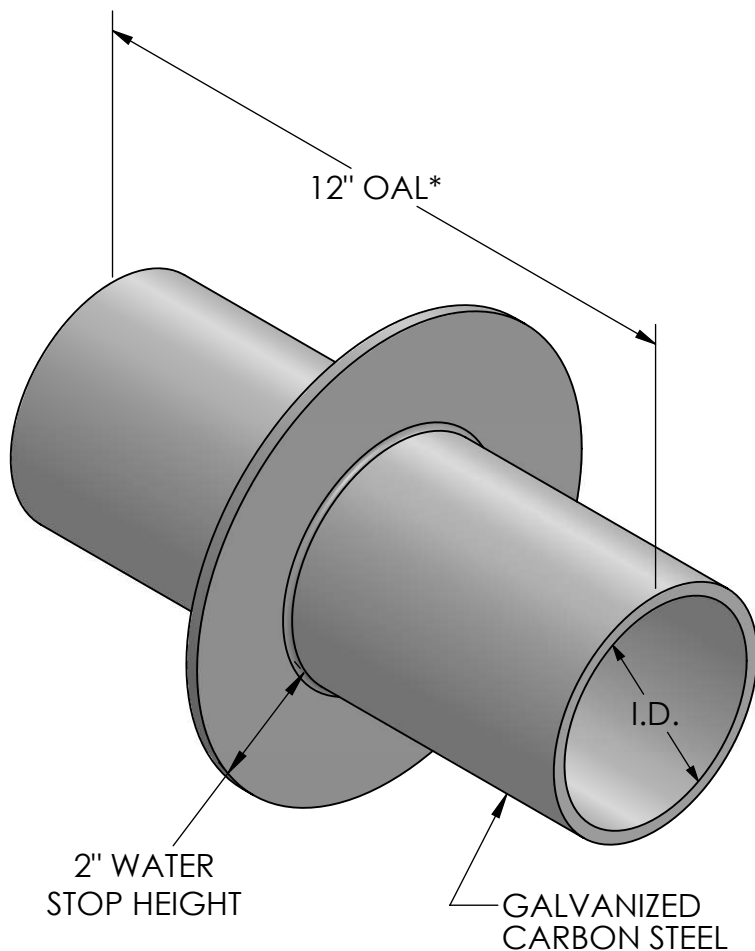


PIPE SIZE	ACTUAL I.D.
2"	2.087"
2.5"	2.559"
3"	3.150"
4"	4.134"
5"	5.157"
6"	6.142"
8"	8.110"
10"	10.039"
12"	12.008"
14"	13.110"
16"	15.118"
18"	17.323"
20"	19.213"
22"	21.260"
24"	23.228"
26"	24.882"
30"	28.898"

*OPTIONAL LENGTHS AND SIZES ARE AVAILABLE.
CONTACT YOUR METRAFLEX REPRESENTATIVE
FOR MORE INFORMATION.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV.	DATE
 <div style="float: right; text-align: right;"> 2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM </div>	
GALVANIZED STEEL WALL SLEEVE	
DRAWN BY: DKISH	DATE: 9/18/2015
APPROVED:	DATE:
SCALE: N/A	DRAWING NUMBER: GALVWALLSLV