


KEYED NOTES

- 1 DEMOLISH EXISTING EXHAUST GRILLES IN SOFFIT.
- 2 EXISTING DOOR GRILLES WILL BE DEMOLISHED WITH DOORS.
- 3 EXISTING EXHAUST DUCT ROUTED UP TO ROOF TO REMAIN.
- 4 DEMOLISH EXISTING FLOOR MOUNTED DIFFUSER AND CAP DUCT. COORDINATE WITH ARCHITECTURAL DRAWINGS AND FLOORING CONTRACTOR TO PATCH FLOOR OPENINGS TO RECEIVE NEW FLOORING.
- 5 REMOVE EXISTING DUCT IN CHASE TO BE DEMOLISHED; REFER TO ARCHITECTURAL DRAWINGS. ENSURE DUCT IS REMOVED TO A POINT BELOW FLOOR LEVEL.
- 6 EXISTING RETURN AIR GRILLES UNDERNEATH BALCONY TO BE REMOVED. PREPARE OPENINGS FOR NEW RETURN AIR GRILLES SHOWN ON M-101.
- 7 REMOVE EXISTING ROUND SUPPLY AIR GRILLES. DEMOLISH DUCTWORK ACCESSIBLE WITHOUT FURTHER CEILING DEMOLITION. REFER TO ARCHITECTURAL DRAWINGS.



1 FIRST FLOOR DEMOLITION PLAN
1/8" = 1'-0"
0 4 8 16

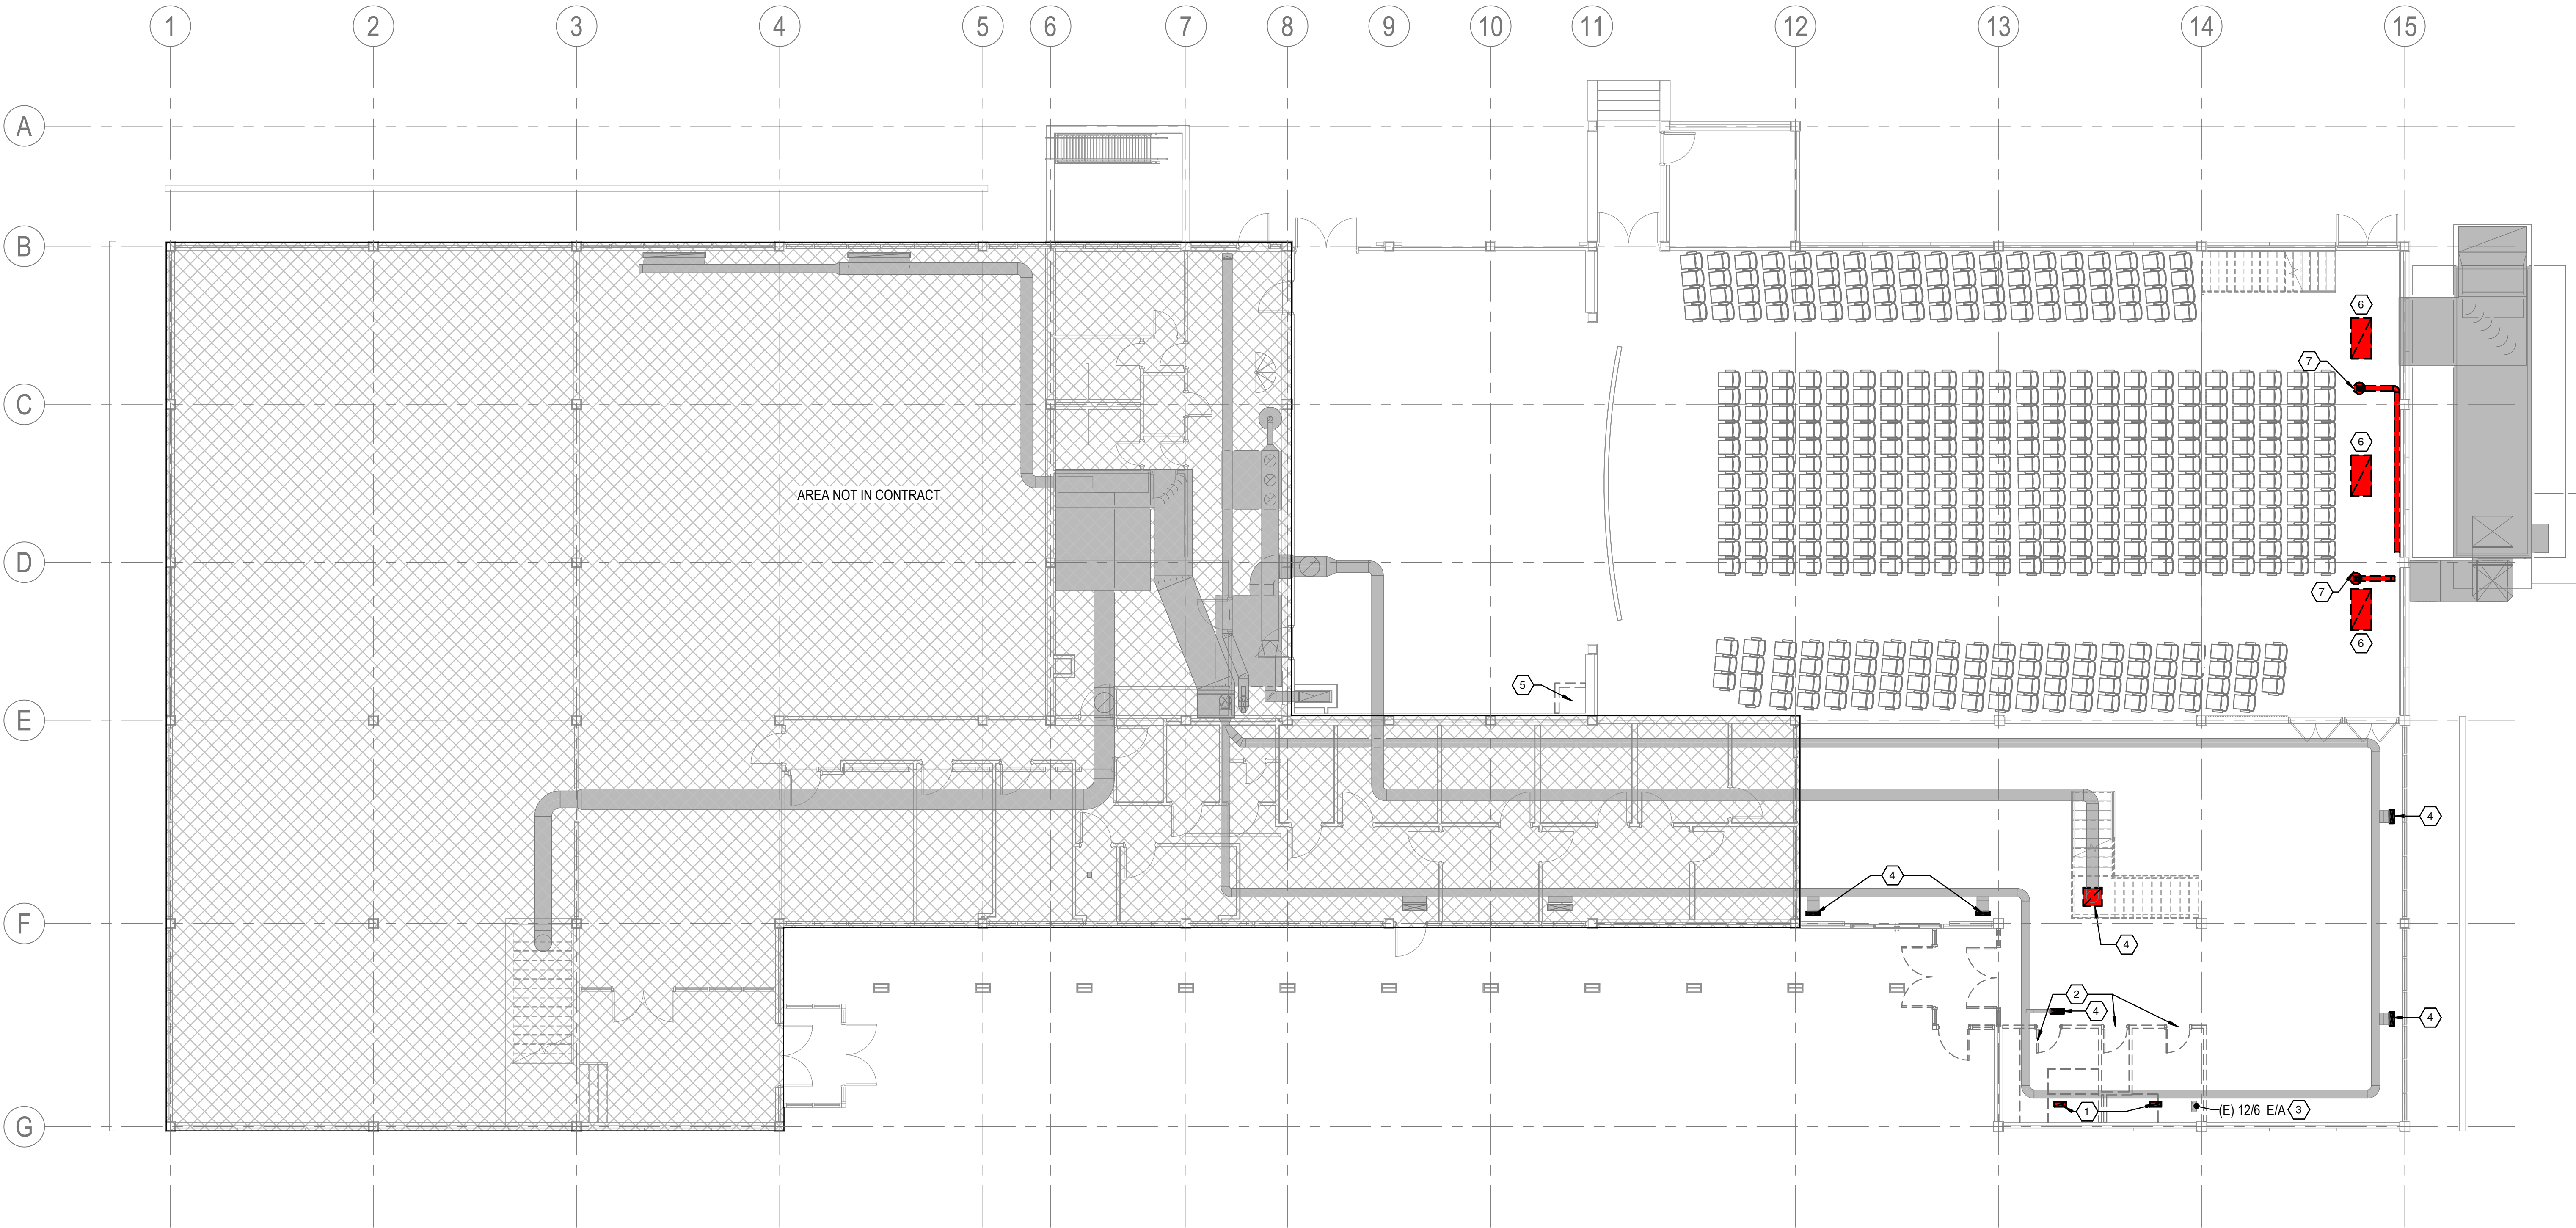

**PHILANDER
SMITH
UNIVERSITY**

M.L. HARRIS
AUDITORIUM
RENOVATION

Volume **VOLUME 1**

Design Phase
**CONSTRUCTION
DOCUMENTS**

Revisions

No.	Date	Description

Stamp

09-10-2026

Notes

- 1. CROMWELL ARCHITECTS ENGINEERS, INC. ALL RIGHTS RESERVED
- 2. THIS SHEET DESIGNED FOR COLOR PRINTING. CRITICAL INFORMATION MAY BE LOST WITH BLACK AND WHITE PRINTING.

Project Number **2024-060**
Issue Date **09-10-2026**
Sheet Title

FIRST FLOOR DEMO PLAN

Sheet Number
MD101