



PHILANDER  
SMITH  
UNIVERSITY


M.L. HARRIS  
AUDITORIUM  
RENOVATION

NOTE: REMOVE AND DISPOSE OF ALL  
EXISTING THEATRICAL RIGGING  
COMPONENTS INCLUDING, BUT NOT  
LIMITED TO, THE FOLLOWING LIST BELOW:

1. HEAD BLOCKS,  
2. LOFT BLOCKS,  
3. MULE BLOCKS,  
4. ARBORS,  
5. AIRCRAFT CABLE,  
6. FIBER ROPE,  
7. ROPE LOCKS,  
8. ARBOR GUIDE ASSEMBLIES,  
9. PIPE,  
10. RIGGING HARDWARE,  
11. TERMINATION ASSEMBLIES,  
12. COUNTERWEIGHT,  
13. AND OTHER MISCELLANEOUS RIGGING  
COMPONENTS NOT LISTED ABOVE.

IF CONTRACTOR IS UNSURE OF ANY  
COMPONENT TO BE REMOVED AND  
DISPOSED OF, PLEASE CONTACT  
CONSULTANT AND ARCHITECT FOR  
FURTHER CLARIFICATION.

EXISTING STORAGE LIFT TO BE  
PROTECTED DURING CONSTRUCTION  
FOR REUSE.

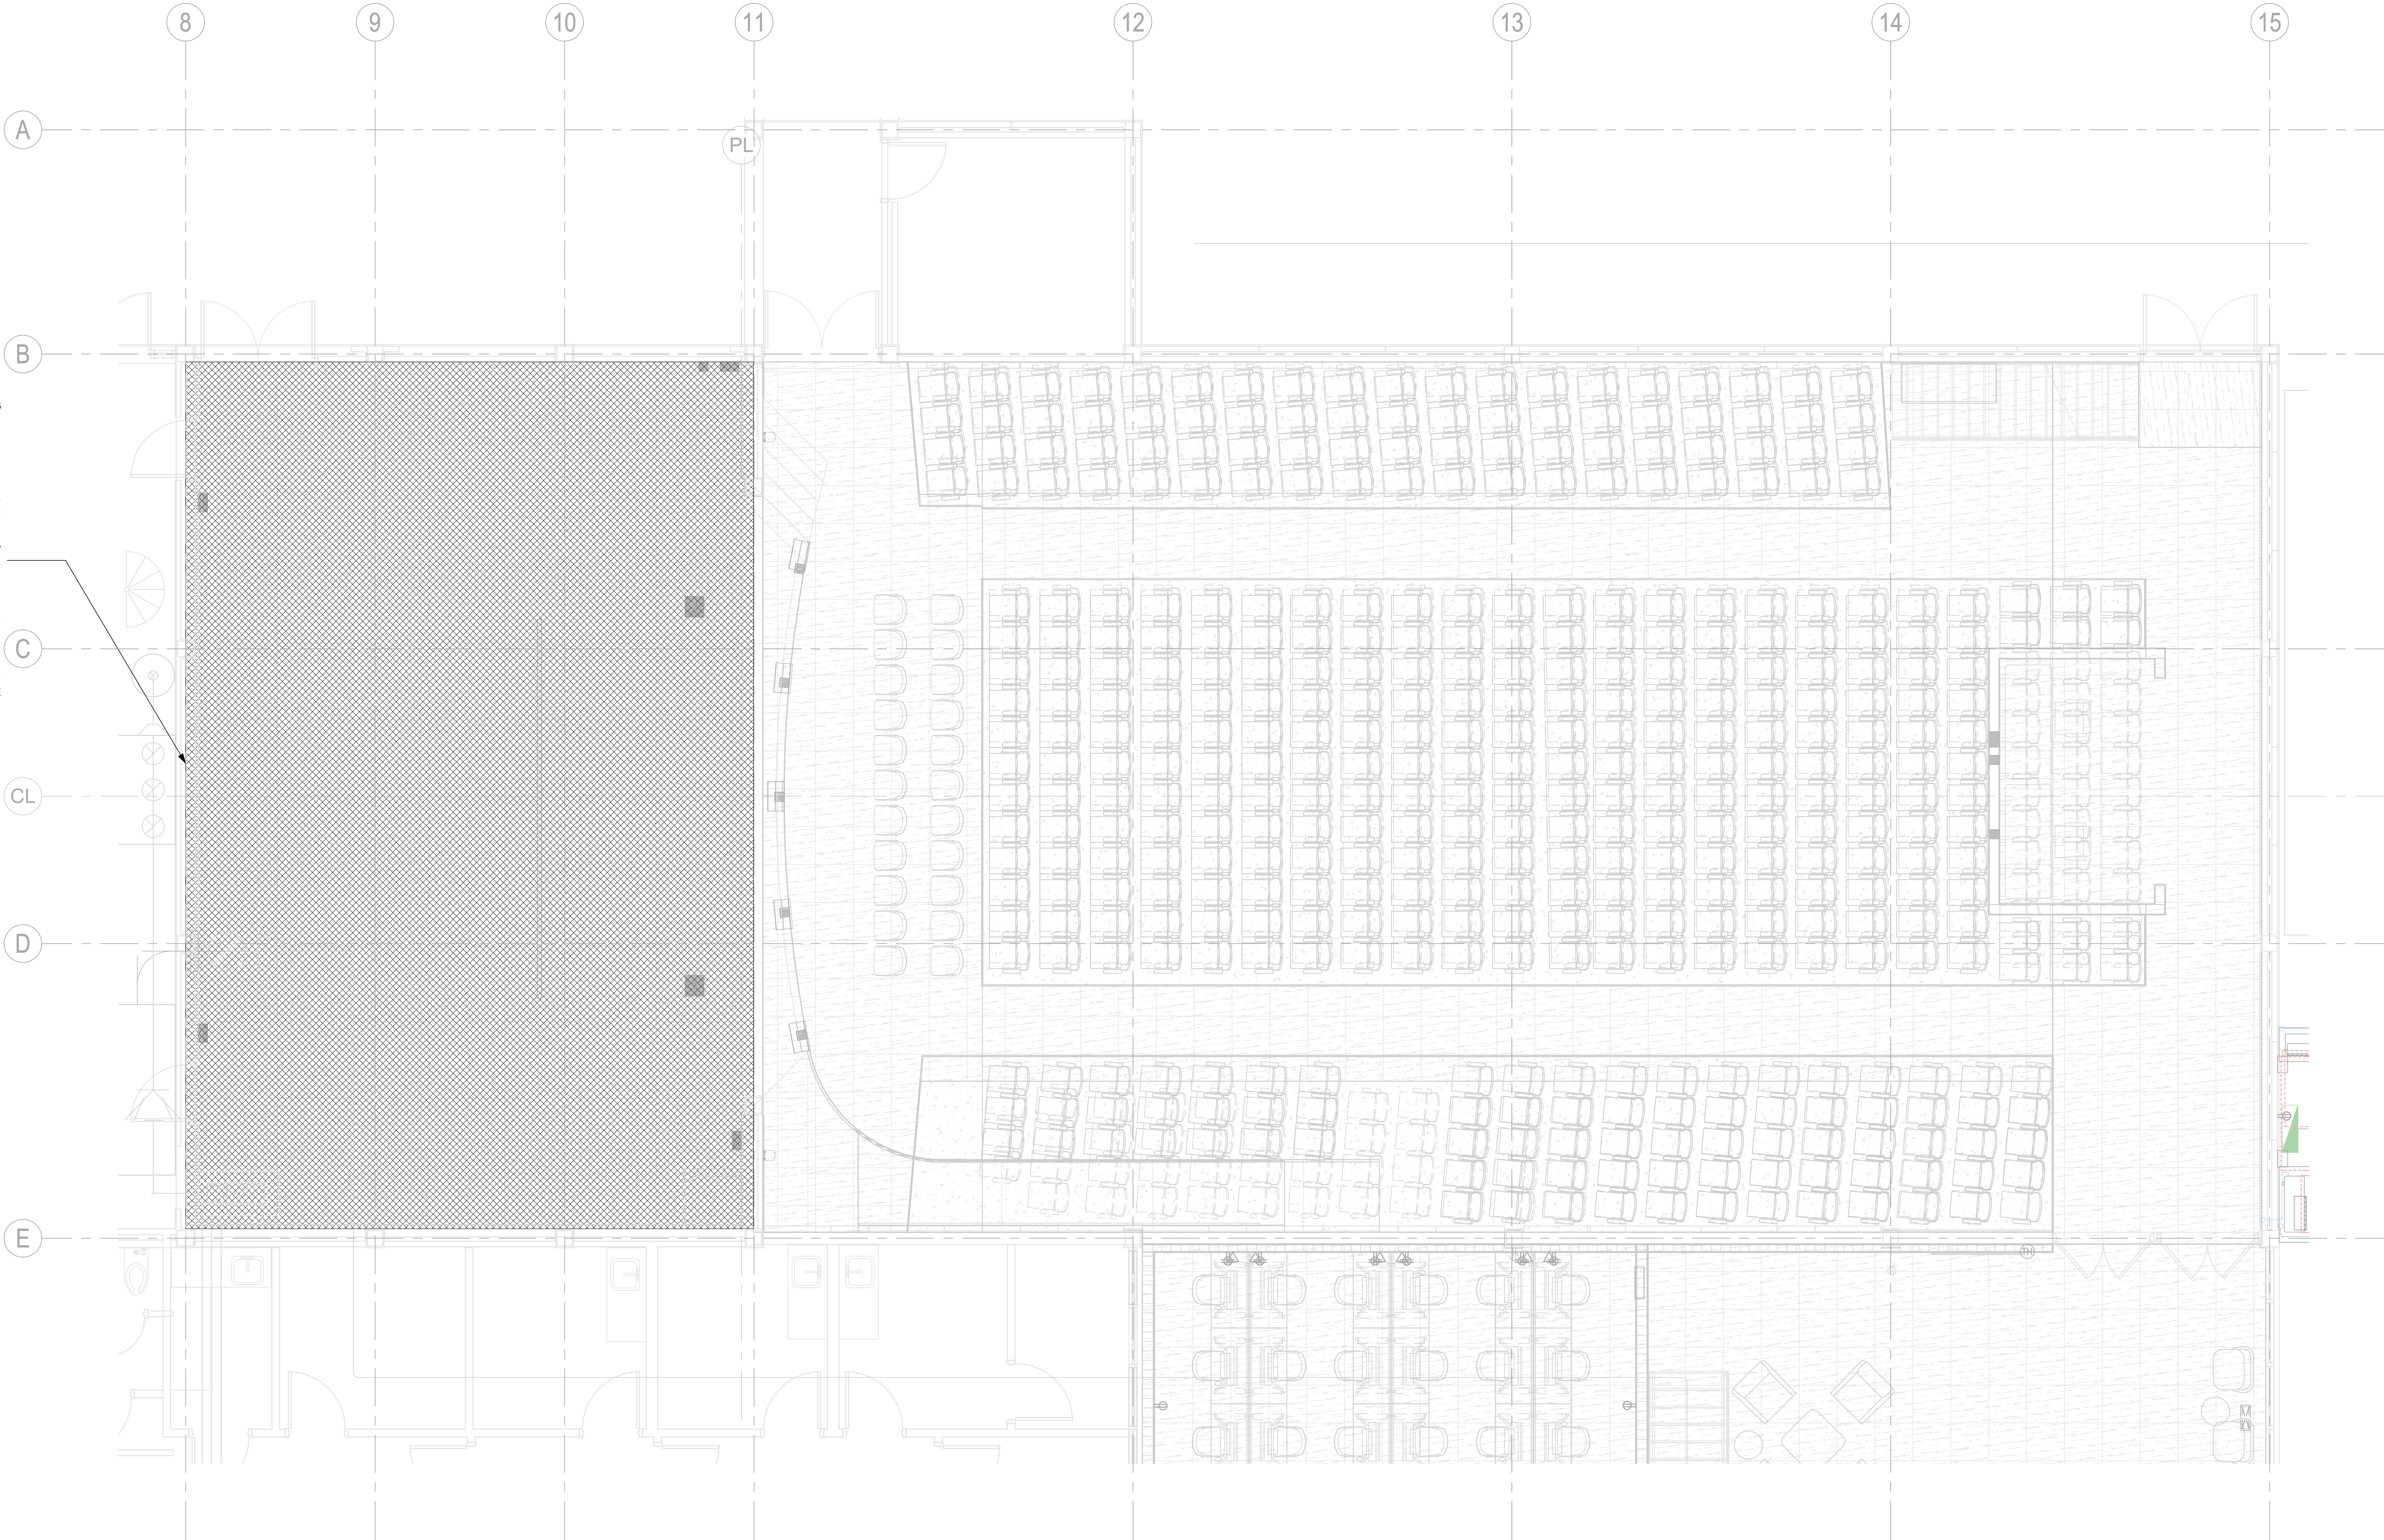

1 PLAN - STAGE LEVEL, THEATRICAL RIGGING, DEMOLITION  
1/4" = 1'-0"

Volume  
VOLUME 2

Design Phase  
CONSTRUCTION  
DOCUMENTS

| Revisions |      |             |
|-----------|------|-------------|
| No.       | Date | Description |
|           |      |             |
|           |      |             |
|           |      |             |
|           |      |             |
|           |      |             |
|           |      |             |
|           |      |             |
|           |      |             |
|           |      |             |

Stamp

Notes  
1. CROMWELL ARCHITECTS ENGINEERS, INC.  
ALL RIGHTS RESERVED  
2. THIS SHEET DESIGNED FOR COLOR PRINTING.  
CRITICAL INFORMATION MAY BE LOST WITH  
BLACK AND WHITE PRINTING.

Project Number  
2024-060

Issue Date  
09-10-2026

Sheet Title

THEATRICAL RIGGING  
LEGEND AND NOTES

Sheet Number

TRD 101