

DEMOLITION GENERAL NOTES

1. ALL EXISTING PIPING AND ACCESSORIES SHALL REMAIN IN PLACE. DEMOLISH ONLY THE PIPING CONNECTED TO PUMPS, BOILERS, EXPANSION TANK, AND AIR SEPARATOR BACK TO SHUT OFF VALVE.

DEMOLITION KEYED NOTES

1. DEMOLISH EXISTING PUMP AND ASSOCIATED PIPING BACK TO SHUTOFF VALVE. DEMOLISH EXISTING ASSOCIATED VFD ALONG WITH ALL WIRING AND CONTROLS.
2. DEMOLISH EXISTING BOILER ALONG WITH ALL CONTROLS AND WIRING. DISCONNECT EXISTING PIPING BACK TO SHUTOFF VALVE AND PREPARE FOR NEW BOILER CONNECTION. DISCONNECT EXISTING NATURAL GAS PIPING AND PREPARE FOR NEW CONNECTION.
3. DEMOLISH EXISTING BOILER FLUE BACK TO POINT INDICATED AND PREPARE FOR NEW CONNECTION.
4. DEMOLISH EXISTING BOILER FLUE BACK TO EXTERIOR PENETRATION. CAP AND SEAL EXISTING FLUE IN ROOM AND ABANDON IN PLACE.
5. DEMOLISH EXISTING AIR SEPARATOR AND EXPANSION TANK. PREPARE EXISTING PIPING CONNECTIONS FOR NEW EQUIPMENT.



UAPB L.A. DAVIS STUDENT UNION
 1200 UNIVERSITY DR, PINE BLUFF AR, 71601

1 FIRST FLOOR DEMOLITION PLAN - MECHANICAL
 1/4" = 1'-0"

REVISIONS:

No.	Description	Date

CONSTRUCTION DOCUMENTS


ISSUE DATE: 03-18-25

PROJECT NUMBER: 24-113

SHEET TITLE:
 FIRST FLOOR DEMOLITION PLAN - MECHANICAL

SHEET NUMBER:

M101

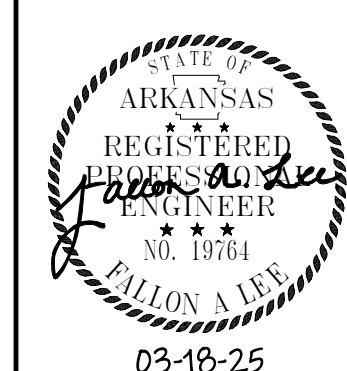

03-18-25