



Quality People. Building Solutions.

Comfort Systems USA (Arkansas), Inc.
P.O. Box 16620
Little Rock, AR 72231
Phone 501-834-3320
Fax 501-834-5416

Date: 2/4/2025

Return Request: 2/14/2025

Project: City Of Sherwood Public Works (Maintenance Building)

Supplier: Comfort Systems USA (Arkansas), Inc.

Manufacturer: MSI

Submittal: HVAC Identification

Submittal Number: 23 05 53-01

Drawing # and Installation: Mechanical Drawings

ARCHITECT

Cromwell
1300 East 6th Street
Little Rock, AR 72202
501-372-2900

ENGINEER

Cromwell
1300 East 6th Street
Little Rock, AR 72202
501-372-2900

GENERAL CONTRACTOR

Baldwin & Shell
1000 W. Capitol Ave.
Little Rock, AR 72201
501-374-8677

MECHANICAL SUBCONTRACTOR

Comfort Systems USA (Arkansas), Inc.
9924 Landers Rd.
N. Little Rock, AR 72117
501-834-3320

Notes:

| |
|--|
| |
|--|

CSUSA PROJECT NO.

24-6084

sean@comfortar.com

9924 Landers Rd.
No. Little Rock, AR 72117



MS-264 ENGRAVED PLASTIC TAGS

Technical Data



Description

MS-264 tags are ideal for marking electrical equipment and control panels. Engraved information clearly shows against the background color. Letter size will be adjusted to fit available space or specification requirement. Standard tag construction is 2 ply 1/16" thick.

Although MS-264 is not a thermoset plastic (phenolic) as designated by ASTM-D709 it is a fire-retardant polymer specifically designed as a safer, formaldehyde and phenol free, alternative to phenolic. MS-264 is non-flammable, UL 94 VO rated, electrically non-conductive, and insulative. Tags are also RoHS compliant, halogen free and PVC free.

Physical and Chemical Characteristics

| | | |
|---|---|---|
| Standard Material: | 2-ply (two laminated layers of engraving plastic) | |
| Optional Material: | 3-ply (three laminated layers of engraving plastic) | |
| Standard Thickness: | 1/16" (1.6 mm) | |
| Optional Thickness: | 1/8" (3.2 mm) | |
| Service Temperature: | -20°F through 175°F (-29°C through 79°C) | |
| Outdoor Durability: | Indoor use only | |
| Finish: | Matte finish with beveled edges | |
| Mounting: | Adhesive backing and/or holes: 3/16" (4.8 mm) default diameter) | |
| Standard Colors: (Non-standard colors available upon request) | <input type="checkbox"/> BLACK (WHITE text) <input type="checkbox"/> GREEN (WHITE text) <input type="checkbox"/> RED (WHITE text) <input type="checkbox"/> BLUE (WHITE text) | <input type="checkbox"/> WHITE (BLACK text) <input type="checkbox"/> YELLOW (BLACK text) <input type="checkbox"/> ORANGE (BLACK text) |
| Text Height: | Sized to fit within tag boundary or comply with specified height | |

Information on physical and chemical characteristics is based on tests we believe to be reliable. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material for their specific application.

Created June 14, 2019

8265 N. Faulkner Road, Milwaukee, WI 53224

Ph: 800.234.0135 | Email: sales@markserv.com | Website: www.markserv.com





ENGRAVED PLASTIC TAGS

Technical Data

WARNING

**ELECTRICAL SHOCK HAZARD
DO NOT TOUCH TERMINALS.
TERMINALS ON BOTH LINE AND
LOAD SIDES MAY BE ENERGIZED
IN THE OPEN POSITION.**

**DC VOLTAGE IS ALWAYS PRESENT
WHEN SOLAR MODULES ARE EXPOSED
TO SUNLIGHT**

Description

Equipment and Valve identification tags are engraved in standard 1/16" or optional 1/8" non-glare finish. Mounting holes or adhesive backing is available. Standard material is 2-ply with 3-ply available.

Engraved information clearly shows against background. Letter size will be adjusted to fit available space or specification requirements. Several stock colors are available with other colors available upon request.

Engraved Plastic tags are non-conductive, insulative, RoHS compliant, halogen free and PVC free.

Physical and Chemical Characteristics

| | | |
|--|---|---|
| Base Material for Engraved Plastic: | Micro-surface Impact Acrylic | |
| Total Thickness: | Standard: 1/16" (1.6 mm); Also available: 1/8" (3.2 mm) | |
| Service Temperature: | -20°F through 175°F (-29°C through 80°C) | |
| Water Resistance: | Excellent | |
| Outdoor Durability: | 5 years minimum | |
| UV Resistance: | Excellent; UV stable; resists yellowing and hazing | |
| Storage Stability: | 5 years minimum | |
| Chemical Resistance: (Intermittent Surface Contact) | Water Excellent; 10% Caustic Excellent; Methanol Excellent; 38% Hydrochloric Acid Excellent; Fuel Oil Excellent; 5% Acetic Acid Excellent | |
| Finish: | Non-glare finish with beveled edges (parallel edges available) | |
| Mounting: | Adhesive back, holes, other mounting options | |
| Standard Colors: (Non-standard colors available upon request) | <input type="checkbox"/> BLACK (WHITE text) <input type="checkbox"/> GREEN (WHITE text) <input type="checkbox"/> RED (WHITE text) <input type="checkbox"/> BLUE (WHITE text) | <input type="checkbox"/> BROWN (WHITE text) <input type="checkbox"/> WHITE (BLACK text) <input type="checkbox"/> YELLOW (BLACK text) <input type="checkbox"/> ORANGE (WHITE text) |
| Typical Sizes (H x W): | <input type="checkbox"/> 1.5" (38 mm) diameter <input type="checkbox"/> 1.5" x 1.5" (38 x 38 mm) <input type="checkbox"/> 1" x 3" (25 x 76 mm) <input type="checkbox"/> 2" x 4" (51 x 102 mm) <input type="checkbox"/> 4" x 8" (102 x 203 mm) | <input type="checkbox"/> 2" (51 mm) diameter <input type="checkbox"/> 2" x 2" (51 x 51 mm) <input type="checkbox"/> 2" x 3" (51 x 76 mm) <input type="checkbox"/> 3" x 6" (76 x 152 mm) <input type="checkbox"/> Other (specify: H x W) |
| Text Height: | Sized to fit within tag boundary or comply with specified height | |

Information on physical and chemical characteristics is based on tests we believe to be reliable. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material for their specific application.

Updated on 2/13/2020



MS-900 SELF-ADHESIVE PIPE MARKERS

Technical Data

FIRE/SMOKE DAMPER

CHILLED WATER RETURN

Description

MS-900 self-adhesive pipe markers are manufactured from premium grade vinyl with a permanent pressure-sensitive acrylic adhesive. They are used to provide line service designations, system color-coding or various labeling needs. MS-900 markers conform to the ASME A 13.1 "Scheme for the Identification of Piping Systems" with regard to label colors, overall size and text height. Flow directional arrow tape or individual arrow markers are used with pipe markers to indicate direction of flow. MS-900 markers are available in a variety of standard and custom colors including clear.

Physical and Chemical Characteristics

| | |
|-------------------------------------|--|
| Base Material for MS-900: | .0032" (0.0812 mm) thick PVC |
| Service Temperature: | -50°F through 180°F (-45°C thru 82°C) |
| Application Temperature: | +50°F (10°C) |
| Water Resistance: | Excellent |
| UV Resistance: | Good |
| Chemical Resistance: | Resistant to acids; alkalis and salts |
| Expected Outdoor Durability: | Base Material: minimum 1 year |
| Storage Durability: | Two years when stored at +73°F (22°C) and 50% relative humidity |
| Finish: | Semi-gloss surface |
| Text Height: | Sized to fit within label boundary or comply with specified height |
| Mounting: | Permanent pressure sensitive acrylic adhesive backing |
| Standard Colors Available: | Clear, White, Red, Green, Yellow, Orange, Blue, Black. Custom colors available upon request. |

Label Sizes and Letter Heights

| Marker Size | Pipe Diameter | Marker Style | Color Field | Letter Height |
|--------------|-----------------|--------------|-------------|---------------|
| 1" x 8" | 3/4" – 2-1/4" | A | 8" long | 3/4" |
| 2-1/4" x 13" | 2-1/2" – 7-7/8" | B | 13" long | 1-3/4" |
| 4" x 24" | 8" – 10" | C | 24" long | 2-1/2" |
| 4" x 32" | Over 10" | D | 32" long | 3-1/2" |

*Individual arrow markers are the same width and one-half the length of the pipe markers.



MS-900 SELF-ADHESIVE PIPE MARKERS

Technical Data

Designation of Colors (ASME A13.1-2015 & ANSI Z535-2017)


| Designation of Colors — ASME A13.1-2015 & ANSI Z535-2017 Standards | | |
|--|----------------------|--------|
| Classification | Color Scheme | |
| Defined Applications | | |
| Fire quenching liquids | White text on red | Sample |
| Toxic and corrosive fluids | Black text on orange | Sample |
| Flammable fluids | Black text on yellow | Sample |
| Combustible fluids | White text on brown | Sample |
| Potable, cooling, boiler feed and other water | White text on green | Sample |
| Compressed air | White text on blue | Sample |
| Undefined Applications | | |
| Defined by user | White text on purple | Sample |
| Defined by user | Black text on white | Sample |
| Defined by user | White text on gray | Sample |
| Defined by user | White text on black | Sample |

Designation of Colors (ANSI/ASME A13.1-1996)

| Designation of Colors — ANSI/ASME A13.1-1996 Standards | | |
|---|----------------------|--------|
| Classification | Color Scheme | |
| Materials Inherently Hazardous | | |
| Flammable or Explosive, Chemically Active or Toxic, Extreme Temperature or Pressures, Radioactive | Black text on yellow | Sample |
| Materials Inherently Low Hazard | | |
| Liquid or Liquid Admixture (non-hazardous materials) | White text on green | Sample |
| Gas or Gaseous Admixture (non-hazardous materials) | White text on blue | Sample |
| Fire Quenching Materials | | |
| Water, Foam, CO2, Halon, etc. | White text on red | Sample |

Information on physical and chemical characteristics is based on tests we believe to be reliable. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material for their specific application.

Revised on 6/4/2020





MS-900 SELF-ADHESIVE ARROW TAPE

Technical Data



Description

MS-900 self-adhesive arrow tape is constructed using a premium grade vinyl with an aggressive acrylic pressure-sensitive adhesive. They are used to provide information regarding direction of flow of pipe's contents. All arrow tape conforms to the ASME A13.1-2015 Scheme for the Identification of Piping Systems and ANSI Z535-2017 with regard to arrow size and width of tape.

Physical and Chemical Characteristics

| | |
|-------------------------------------|--|
| Film: | .0032" (0.0812 mm) thick PVC |
| Adhesive: | Permanent pressure-sensitive acrylic |
| Service Temperature: | -50°F to +180°F (-45°C to 82°C) |
| Application Temperature: | +50°F (10°C) |
| Water Resistance: | Excellent |
| UV Resistance: | Good |
| Chemical Resistance: | Resistant to acids, alkalis and salts |
| Expected Outdoor Durability: | Base Material: 1 year; With optional MS-1000 over lamination 5 years |
| Storage Durability: | Two years when stored at +73°F (22°C) and 50% relative humidity |





MS-900 SELF-ADHESIVE ARROW TAPE

Technical Data

Designation of Colors (ASME A13.1-2015 & ANSI Z535-2017)

| Designation of Colors — ASME A13.1-2015 & ANSI Z535-2017 Standards | | |
|--|----------------------|--------|
| Classification | Color Scheme | |
| Defined Applications | | |
| Fire quenching liquids | White text on red | Sample |
| Toxic and corrosive fluids | Black text on orange | Sample |
| Flammable fluids | Black text on yellow | Sample |
| Combustible fluids | White text on brown | Sample |
| Potable, cooling, boiler feed and other water | White text on green | Sample |
| Compressed air | White text on blue | Sample |
| Undefined Applications | | |
| Defined by user | White text on purple | Sample |
| Defined by user | Black text on white | Sample |
| Defined by user | White text on gray | Sample |
| Defined by user | White text on black | Sample |

Designation of Colors (ANSI/ASME A13.1-1996)

| Designation of Colors — ANSI/ASME A13.1-1996 Standards | | |
|---|----------------------|--------|
| Classification | Color Scheme | |
| Materials Inherently Hazardous | | |
| Flammable or Explosive, Chemically Active or Toxic, Extreme Temperature or Pressures, Radioactive | Black text on yellow | Sample |
| Materials Inherently Low Hazard | | |
| Liquid or Liquid Admixture (non-hazardous materials) | White text on green | Sample |
| Gas or Gaseous Admixture (non-hazardous materials) | White text on blue | Sample |
| Fire Quenching Materials | | |
| Water, Foam, CO2, Halon, etc. | White text on red | Sample |





MS-900 SELF-ADHESIVE ARROW TAPE

Technical Data

Arrow Tape Sizes

| Size | Part Number | Arrow/Bg Color | Size | Part Number | Arrow/Bg Color |
|------------|-------------|----------------|------------|-------------|----------------|
| 1" x 30YDS | 95105 | BLK/GRN | 1" x 30YDS | 95109 | WHT/BRN |
| 2" x 30YDS | 95205 | BLK/GRN | 2" x 30YDS | 95209 | WHT/BRN |
| 4" x 30YDS | 95405 | BLK/GRN | 4" x 30YDS | 95409 | WHT/BRN |
| 1" x 30YDS | 95106 | BLK/ORG | 1" x 30YDS | 95110 | WHT/GRY |
| 2" x 30YDS | 95206 | BLK/ORG | 2" x 30YDS | 95210 | WHT/GRY |
| 4" x 30YDS | 95406 | BLK/ORG | 4" x 30YDS | 95410 | WHT/GRY |
| 1" x 30YDS | 95107 | BLK/WHT | 1" x 30YDS | 95102 | WHT/GRN |
| 2" x 30YDS | 95207 | BLK/WHT | 2" x 30YDS | 95202 | WHT/GRN |
| 4" x 30YDS | 95407 | BLK/WHT | 4" x 30YDS | 95402 | WHT/GRN |
| 1" x 30YDS | 95101 | BLK/YEL | 1" x 30YDS | 95104 | WHT/BLU |
| 2" x 30YDS | 95201 | BLK/YEL | 2" x 30YDS | 95204 | WHT/BLU |
| 4" x 30YDS | 95401 | BLK/YEL | 4" x 30YDS | 95404 | WHT/BLU |
| 1" x 30YDS | 95103 | WHT/RED | 1" x 30YDS | 95111 | WHT/PUR |
| 2" x 30YDS | 95203 | WHT/RED | 2" x 30YDS | 95211 | WHT/PUR |
| 4" x 30YDS | 95403 | WHT/RED | 4" x 30YDS | 95411 | WHT/PUR |
| 1" x 30YDS | 95108 | WHT/BLK | | | |
| 2" x 30YDS | 95208 | WHT/BLK | | | |
| 4" x 30YDS | 95408 | WHT/BLK | | | |

Information on physical and chemical characteristics is based on tests we believe to be reliable. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material for their specific application.

Created on 6/6/2019





Marking Services Incorporated

BRASS BEAD CHAIN

Technical Data



Description

Our #6 Solid Brass Bead Chain is supplied 100 pieces per box. It is a flexible solid brass chain and provided in 4.5" (114 mm) lengths with a locking link on the end of the chain. The diameter of the chain is 1/8" with a tensile strength of 20 lbs. and approximately 70 balls per foot.

The chain is ideal for use in non-caustic environments and can be linked together to accommodate large valves.

MSI Part Number: 15765

Information on physical and chemical characteristics is based on tests we believe to be reliable. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material for their specific application.

Created on 6/17/2010

8265 N. Faulkner Road, Milwaukee, WI 53224

Ph: 800.234.0135 | Email: sales@markserv.com | Website: www.markserv.com





LASER ENGRAVED BRASS TAGS

Technical Data



Description

Brass valve tags are available as 1-1/2" or 2" diameter round or square with one 3/16" hole. Laser engraved tags have high contrast text making it easy to read. Due to the chemical reaction during the engraving process, the text becomes part of the tag and will not flake off or fade. Other sizes and shapes are available upon request. These tags are available with or without hole(s). Hole location and size must be specified.

A variety of fasteners are available including Brass "S" hooks, #16 jack chain, and brass bead chain. Other attachment methods are available upon request.

Physical and Chemical Characteristics

| | | |
|------------------------------|---|--|
| Standard Material: | Brass | |
| Standard Thickness: | 20 Gauge (0.032"/0.812 mm thick) | |
| Optional Thickness: | Available upon request | |
| Service Temperature: | -40°F through 500°F (-40°C through 260°C) | |
| Standard Colors: | High contrast text on Brass background | |
| Non-standard Colors: | n/a | |
| Mounting: | Adhesive backing and/or holes; Ø3/16" (Ø4,8 mm) default diameter | |
| Finish: | Standard finish, brushed finish available | |
| Text Height: | 1/4" service indicator on top line | |
| Available Characters: | 1/8" Text , # / \ " - . ' ° () A thru Z – all upper case & 0 thru 9 1/4" Text , # / \ " - . ' ° & ° A thru Z – all upper case & 0 thru 9 1/2" Numbers 0 thru 9 | |
| Typical Sizes: | <input type="checkbox"/> 1" x 3" (25 x 76 mm) <input type="checkbox"/> 1.5" (38 mm) diameter <input type="checkbox"/> 1.5" x 1.5" (38 x 38 mm) <input type="checkbox"/> 2" (51 mm) diameter <input type="checkbox"/> 2" x 2" (51 x 51 mm) | <input type="checkbox"/> 2" x 4" (51 x 102 mm) <input type="checkbox"/> 2" x 6" (51 x 152 mm) <input type="checkbox"/> 4" x 6" (102 x 152 mm) <input type="checkbox"/> Other (specify: H x W) |


Information on physical and chemical characteristics is based on tests we believe to be reliable. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material for their specific application.

Revised on 10/14/2019



VALVE CHART FRAME

Technical Data

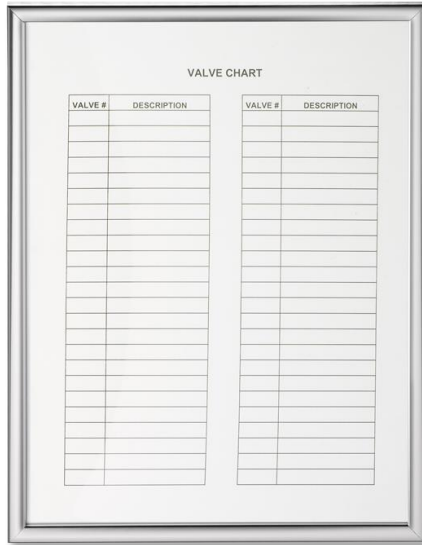

Description

Valve Chart Frame is designed to hold 8-1/2" x 11" (216 mm x 279 mm) valve charts. Plastic lens included. Glass lens is available upon request. Glass lens is glazing quality B, Class 1, Type I, ASTM C 1036, 2.5 mm single thickness. Frames are natural finish anodized extruded aluminum. Wall mountable.

MSI Part Number: 15790

Information on physical and chemical characteristics is based on tests we believe to be reliable. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material for their specific application.


Revised on 10/23/2019





MS-900 SELF-ADHESIVE CEILING MARKERS

Technical Data

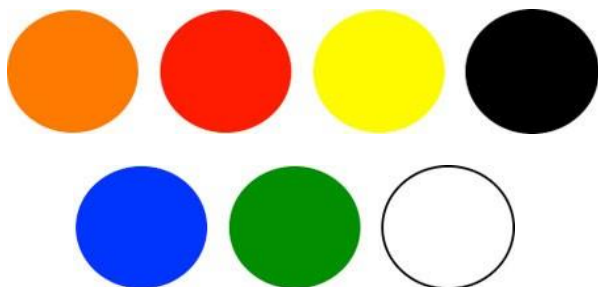

Description

MS-900 Self-Adhesive Ceiling Markers are ideal for marking the location of valves, dampers, booster coils and controllers above acoustical ceiling tiles.

Physical and Chemical Characteristics

| | |
|---|---|
| Film: | .0032" (0.0812 mm) thick material |
| Adhesive: | Permanent pressure-sensitive acrylic |
| Service Temperature: | -50°F to +180°F (-45°C to 82°C) |
| Application Temperature: | +50°F (10°C) |
| Water Resistance: | Excellent |
| Chemical Resistance: | Resistant to mild acids, alkalis and salts |
| Expected Outdoor Durability: | Five years when properly applied |
| Storage Durability: | Two years when stored at +73°F (22°C) and 50% relative humidity |
| Available Sizes: | <input type="checkbox"/> 3/4" (19 mm) <input type="checkbox"/> 7/8" (22.22 mm) |
| Available Stock Colors: (Additional colors available upon request) | <input type="checkbox"/> Orange <input type="checkbox"/> Red <input type="checkbox"/> Yellow <input type="checkbox"/> Black <input type="checkbox"/> Blue <input type="checkbox"/> Green <input type="checkbox"/> White |

Information on physical and chemical characteristics is based on tests we believe to be reliable. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material for their specific application.

Revised on 10/22/2019

