

GENERAL NOTES:

- BAS GRAPHICS SHALL INCLUDE EQUIPMENT SUMMARIES FOR THE ENTIRE BUILDING.
- SUMMARIES SHALL INDICATE THE SYSTEM SERVED BY THE COMPONENT.
 OPERATORS WITH APPROPRIATE CLEARANCE SHALL BE CAPABLE OF CHANGING SET POINTS FROM THE
- 4. OVERRIDDEN VALUES SHALL BE HIGHLIGHTED OR THE TEXT COLOR SHALL CHANGE TO INDICATE VALUES HAVE BEEN OVERRIDDEN.
- 5. EQUIPMENT IN ALARM SHALL BE HIGHLIGHTED RED OR THE TEXT SHALL TURN RED TO INDICATE AN ALARM.

 6. IDENTIFY ALL ALARMS ASSOCIATED WITH EACH PIECE OF FOLIPMENT. A GENERAL ALARM STATUS CAN BE
- 6. IDENTIFY ALL ALARMS ASSOCIATED WITH EACH PIECE OF EQUIPMENT. A GENERAL ALARM STATUS CAN BE DISPLAYED AND SPECIFIC ALARMS CAN BE VIEWED BY CLICKING ON THE ALARM STATUS FOR THAT BOX.
- 7. REPORTS ARE NOT AN ACCEPTABLE FORM OF SYSTEM SUMMARIES. REPORTS SHALL CONTAIN LIVE DATA.


 8. SCHEDULE COLUMNS SHALL BE CAPABLE OF BEING TOGGLED ON AND OFF.
- ALL EQUIPMENT SHALL BE CAPABLE OF BEING EXCLUDED FROM ANY RESET CALCULATION.
 GRAPHICS SHALL INCLUDE A SUMMARY TABLE SIMILAR TO THAT SHOWN. THIS PROJECT MAY REQUIRE
- ADDITIONAL ROWS, COLUMNS, GRAPHICS, AND CALCULATIONS TO BE INCORPORATED (CONTROL LOOP OUTPUTS, BUILDINGS, ETC).
- 11. PROVIDE LINKS TO AND FROM BUILDING FLOOR GRAPHICS AND SYSTEM GRAPHICS.12. TABLES INDICATED HERE ARE PROVIDED TO CONVEY THE MINIMUM LEVEL OF DETAIL EXPECTED.

UNITAF	RY EQU	IPMEN ⁷	T SUMN	//AR	Y																		
ESIGNATION	AREA SERVED	SPACE TEMP CONTROL LOOPOUT	FAN SPEED SET POINT		MIN SPACE SETP.	MAX SPACE SETP.	CLG LOW LIMIT SETP.	HTG HIGH LIMIT TEMP SETP.	MIN. SPACE TEMP. SET POINT	MAX. SPACE TEMP. SET POINT	MAX SAT DIFF. SET POINT		ACTIVE SPACE TEM SET POINT		CLG DA SET POINT	PRESSURE.	HW VALVE COMMAND	HW VALVE POSITION	CHW PRESSURE. SETP. RESET	CHW VALVE COMMAND	CHW VALVE POSITION	OCCUPANCY STATUS	ALARMS
CU-###	AREA ###	-	-	-	-	-	-	-			-	-	-	-	-	₩	-	-	\square	-	-	-	-
CU-###	AREA ###	-	-	-	-	-	-	-			-	-	-	-	-		-	-		-	-	-	-
SUMMARY		MIN. / MAX.		1	+	1				1	1	1		1	1		MIN. / MAX.	MIN. / MAX.		MIN. / MAX.			
		,																'					
								BLDG ENTE WATER TI		BLDG LE WATER		- Z0	ONE 1 PRESS SETPOINT	II.	_ Z	ONE 2 PRESSUR SETPOINT	E _						

1 BUILDING EQUIPMENT SUMMARY

VARIABLE FREQUENCY DRIVE SCHEDULE

DESIGNATION	REFERENCE PRODUCT	LOCATION	SERVES	TYPE	RATED HORSPOWER	EFFICIENCY (%)	VOLTAGE/ PHASE	REMARKS
VFD-HWP-1	ABB ACH 550	MECHANICAL ROOM	HWP-1	PWM	7.5	98	208 / 3	PROVIDED BY DIVISION 23 ATC CONTRACTOR, DISPLAY AND BUTTONS SHALL BE EXTERNAL TO UNIT
VFD-HWP-2	ABB ACH 550	MECHANICAL ROOM	HWP-2	PWM	7.5	98	208 / 3	PROVIDED BY DIVISION 23 ATC CONTRACTOR, DISPLAY AND BUTTONS SHALL BE EXTERNAL TO UNIT

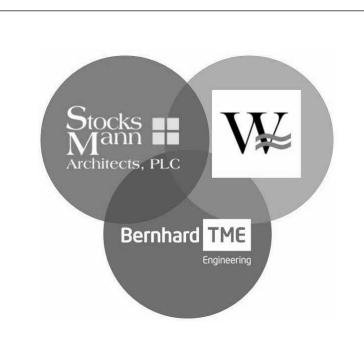

Lead Architect:
Stocks-Mann Architects, PLC
401 W. Capitol, Suite 401

501-370-9207

Associate Architect:
Woods Group Architects
2200 Main Street
Little Rock, AR 72206

501-372-2230

Little Rock, AR 72201

Structural Engineer:

Bernhard TME

1 Allied Drive, Suite 2600

Little Rock, AR 72202

501-666-6676

MEP/Fire Protection Engineer:
Bernhard TME
1 Allied Drive, Suite 2600
Little Rock, AR 72202
501-666-6776



5/	רווסןו	
No.	Description	Dat

UCA Housing Renovations - Phase 2 State Hall

University of Central Arkansas Conway, Arkansas

SMA Project Number 1807

Date 05-10-2019

Phase Construction Drawings

Contents

UCA Project Number

CONTROLS - HVAC

Shoot Number

M6.2

5/9/2019 1:37:28 PM

UCA-19-021