
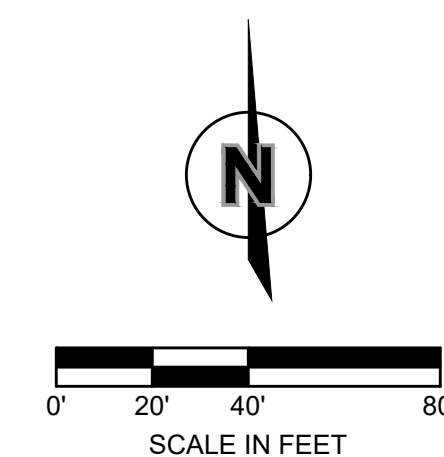


- NOTES:**
1. ALL REMOVED MATERIAL SHALL BE DISPOSED OF OFF-SITE AT CONTRACTOR'S EXPENSE TO AN APPROVED DUMP SITE UNLESS OTHERWISE NOTED.
 2. SAWCUT OF EXISTING PAVEMENT SHALL BE TO NEAREST JOINT LINE.
 3. CRUSHED STONE FILL CAN BE STOCKPILED AND REUSED, IF IT HAS PROPER GRADATION CHARACTERISTICS AS DETERMINED BY GEOTECHNICAL ENGINEER DURING CONSTRUCTION.
 4. UPON REMOVAL OF SURFACE MATERIALS, THE EXPOSED SUBGRADE SHOULD BE CAREFULLY OBSERVED BY A GEOTECHNICAL ENGINEER.
 5. CONTRACTOR TO PROVIDE TRAFFIC CONTROL ROUTING AND PLANS FOR THE CONSTRUCTION INCLUDED IN THESE PLANS. CONTRACTOR SHALL OBTAIN THE NECESSARY PERMITS FOR THE STREET CLOSURES AND COORDINATE THESE CLOSURES WITH THE CITY AS REQUIRED.
 6. PLANS ARE BASED ON GIS DATA, PREVIOUS PROJECT DESIGNS, AND SURVEY COMPLETED BY OLSSON AUGUST 2026.
 7. CONTRACTOR SHALL ENSURE ALL CONSTRUCTION AND EQUIPMENT USED IS APPROVED BY FAA AND MEETS ALL FAA REQUIREMENTS. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL FAA CONSTRUCTION PERMITS AND SHALL COORDINATE WITH THE FAA AND NATIONAL AIRPORT AUTHORITY DURING CONSTRUCTION.

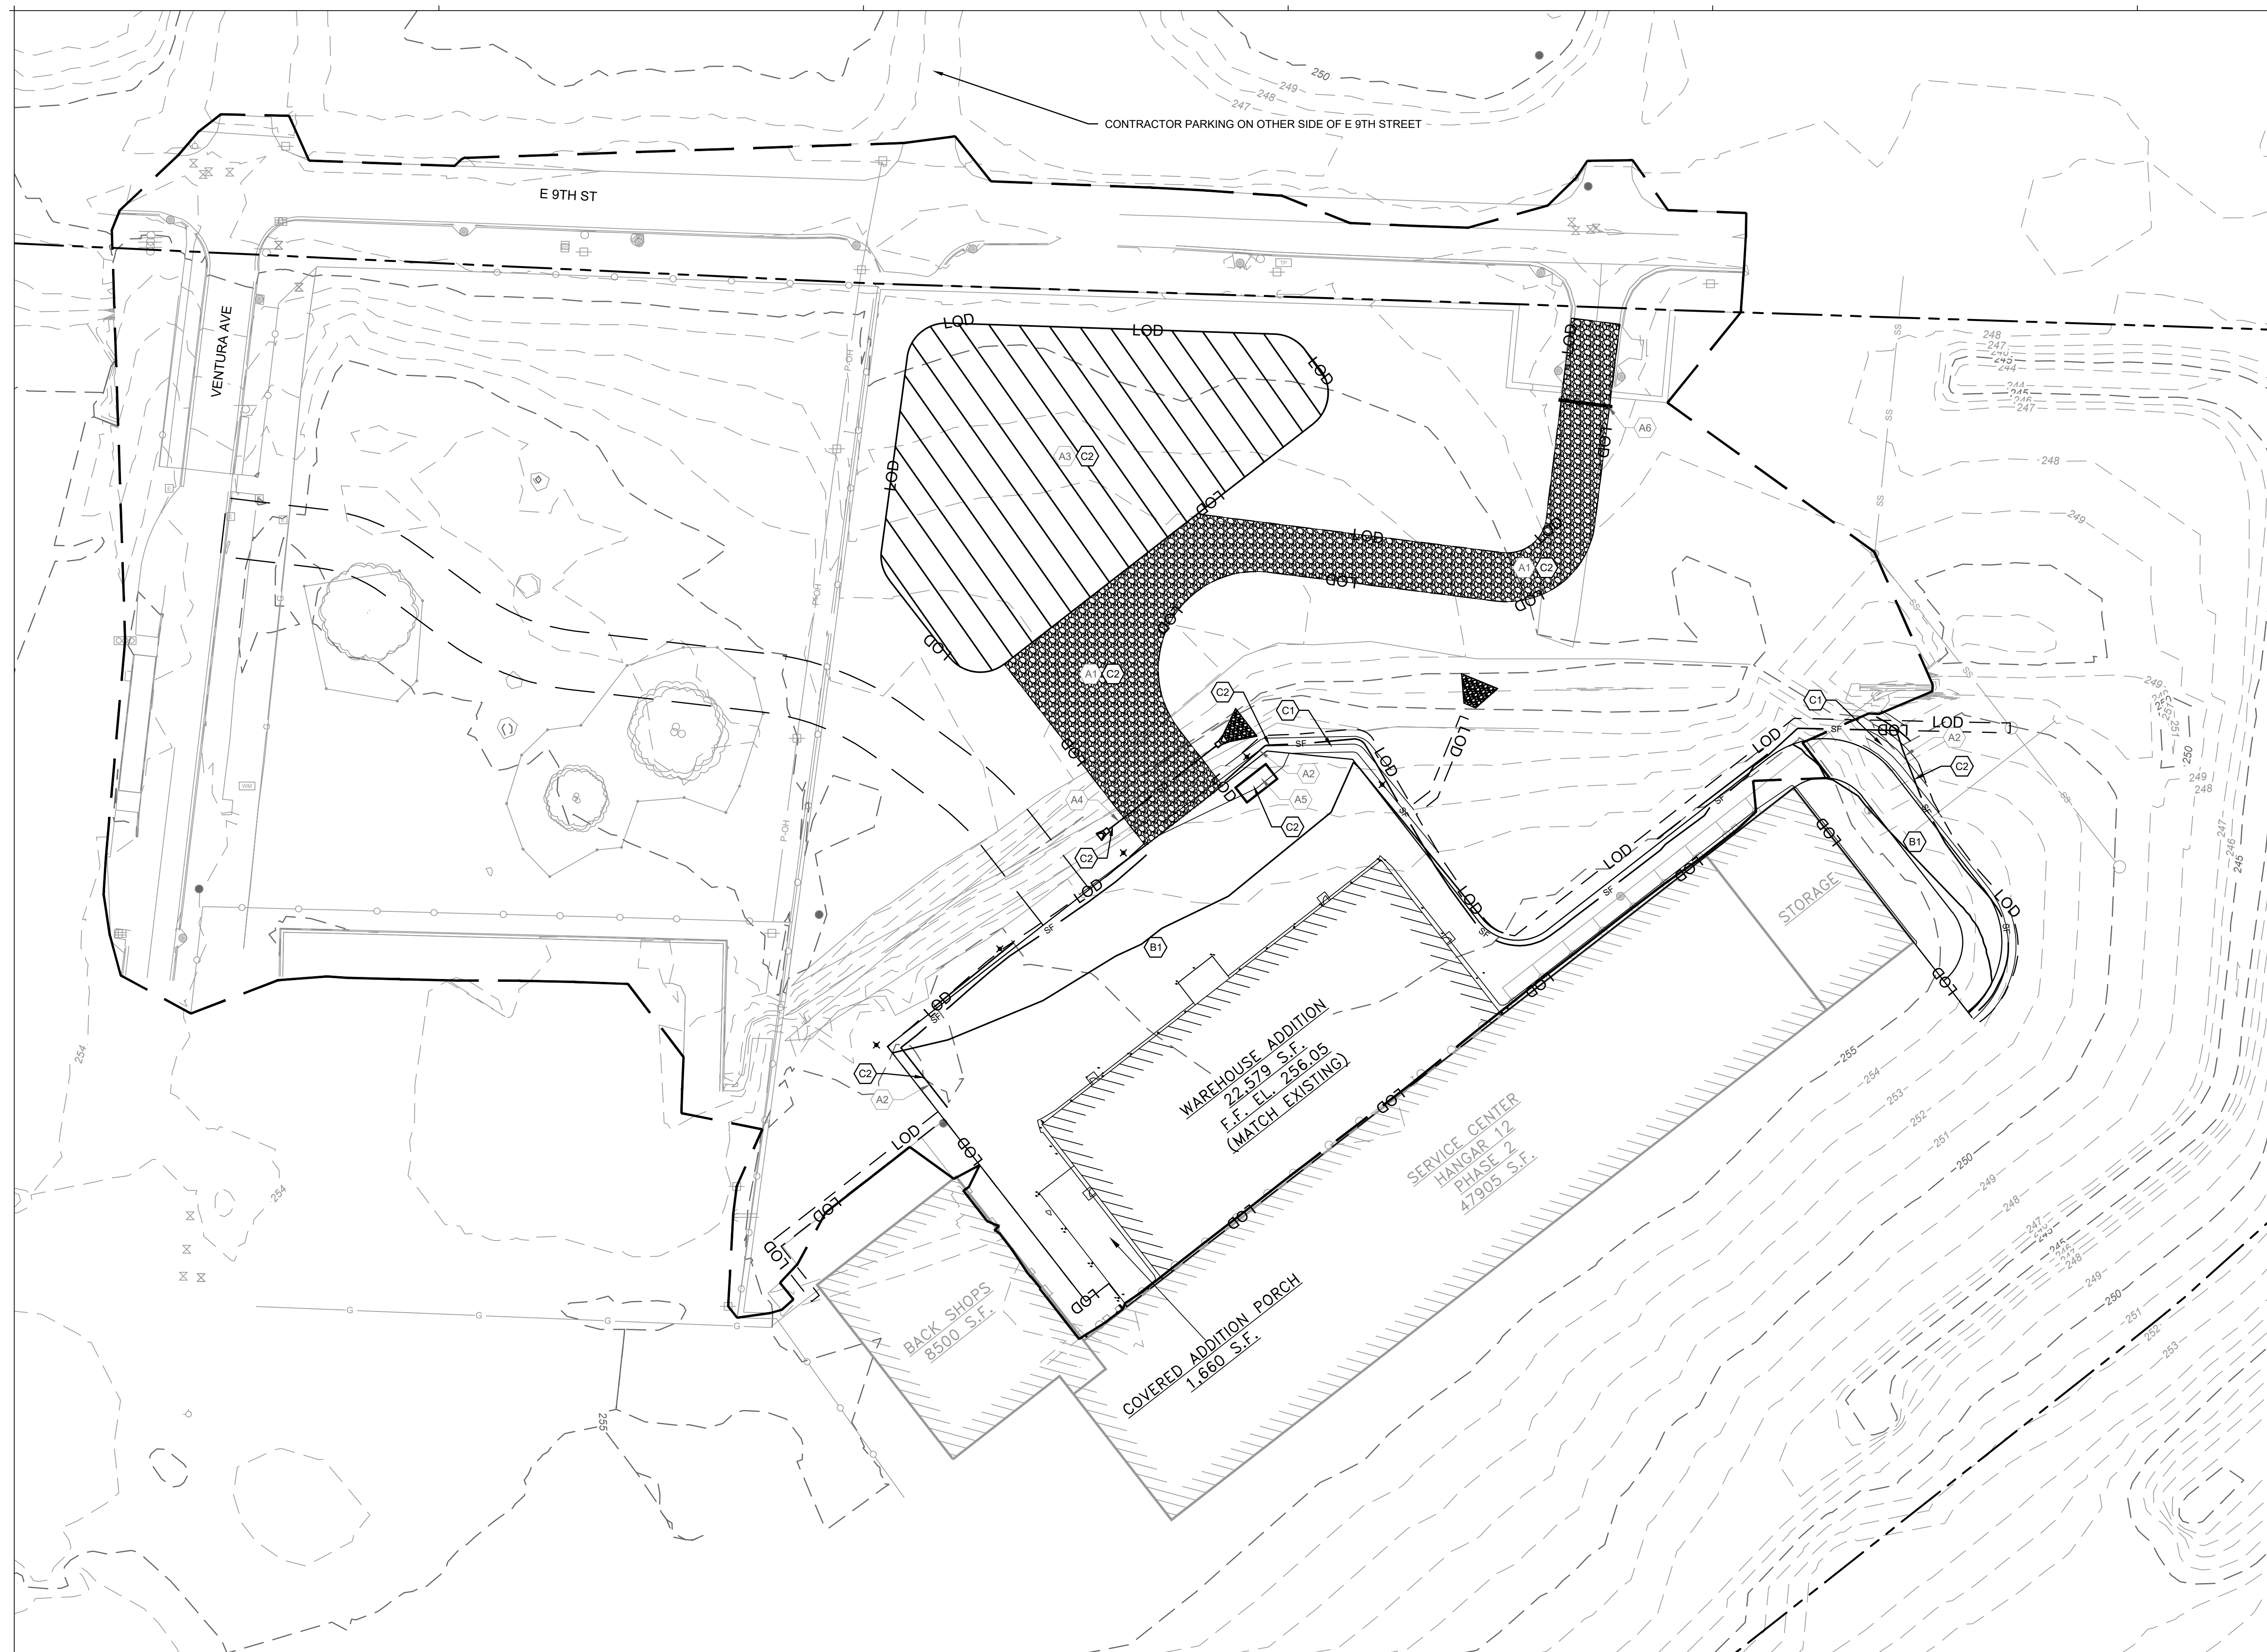

LEGEND

	EXISTING FENCE		PROPERTY LINE
	EXISTING BUILDING		LIMITS OF DISTURBANCE
	EXISTING TREE		SILT FENCE
	EXISTING CURB AND GUTTER		STABILIZED CONSTRUCTION ENTRANCE
	EXISTING OVERHEAD POWER LINE		TEMPORARY STAGING/STOCKPILE AREA
	EXISTING SURVEY MONUMENT		TEMPORARY CONCRETE WASHOUT
	EXISTING SANITARY SEWER MANHOLE		EDGE OF COMPLETED OLSSON SURVEY
	EXISTING SANITARY SEWER CLEANOUT		
	EXISTING GUY WIRE		
	EXISTING POWER POLE		
	EXISTING STORM SEWER MANHOLE		
	EXISTING ROOF DRAIN		
	EXISTING MAJOR CONTOUR		
	EXISTING MINOR CONTOUR		

EROSION CONTROL STAGING CHART

EROSION CONTROL STAGING CHART				
PROJECT STAGE	EROSION CONTROL BMP REFERENCE NO.	BMP DESCRIPTION	REMOVE AFTER STAGE	NOTES:
A - PRE-CONSTRUCTION	A1	CONSTRUCTION ENTRANCE	C	INSTALL AS INDICATED ON PLANS
	A2	INSTALL PERIMETER SEDIMENT FENCE	C	INSTALL AS INDICATED ON PLANS
	A3	TEMPORARY STAGING/STOCKPILE AREA	C	CONTRACTOR IS TO DESIGNATE THE LOCATION OF THE STAGING AND STOCKPILE AREAS
	A4	TEMPORARY CULVERT AND RIP RAP	C	CONTRACTOR IS TO DESIGNATE THE LOCATION AND INSTALLATION OF THE CULVERT
	A5	TEMPORARY CONCRETE WASHOUT	C	INSTALL AS INDICATED ON PLANS OR AS DESIGNATED BY CONTRACTOR
	A6	SECURED CONSTRUCTION GATE	N/A	INSTALL AS INDICATED ON PLANS
B - CONSTRUCTION	B1	PAVING	N/A	INSTALL AS INDICATED ON PLANS
C - POST CONSTRUCTION: FINAL STABILIZATION	C1	FINAL STABILIZATION	N/A	ESTABLISH PERENNIAL VEGETATION WITH A 80 DENSITY OVER 100% OF DISTURBED AREA.
	C2	REMOVAL OF BMPS	N/A	REMOVE ANY TEMPORARY BMPS ON SITE.

NOTE: LIMITS OF DISTURBANCE = ± 2.50 ACRES