


POWER AND SYSTEMS
GENERAL NOTES

1. LIGHT SWITCH COVERS TO BE LABELED WITH PANEL AND BREAKER NUMBER INSIDE COVER FOR RECESSED SWITCHES AND OUTSIDE COVER WITH CLEAR TAPE AND BLACK LETTERS FOR SURFACE MOUNTED SWITCHES.
2. OUTLET COVERS TO BE LABELED WITH PANEL AND BREAKER NUMBER INSIDE COVER FOR RECESSED OUTLETS AND OUTSIDE COVER WITH CLEAR TAPE AND BLACK LETTERS FOR SURFACE MOUNTED OUTLETS.
3. DATA WORK TO BE ACCOMPLISHED BY WHITE'S CABLING (DATA RUNS FOR WORKSTATIONS, CAMERAS AND WIFI)
4. FIRE ALARM WORK TO BE ACCOMPLISHED BY POTTER.
5. ALL RECEPTACLES LOCATED IN RESTROOMS, JANITOR CLOSETS, MECHANICAL ROOMS, SERVING ELECTRIC DRINKING FOUNTAINS OR VENDING MACHINES, LOCATED WITHIN 6' OF A SINK, LOCATED ABOVE A WET COUNTERTOP OR IN A KITCHEN OR COFFEE BAR SHALL BE GFCI. EACH GFCI PROTECTED RECEPTACLE SHARING THE SAME CIRCUIT SHALL HAVE ITS OWN RE-SET AND TEST BUTTON.
6. ALL EXPOSED CONDUIT SHALL BE ROUTED PERPENDICULAR, PARALLEL, AND TIGHT TO COLUMNS AND BEAMS. ALL EXPOSED CONDUIT ROUTING SHALL BE COORDINATED WITH ENGINEER AND ARCHITECT PRIOR TO INSTALLATION. NO ADDITIONAL COST TO OWNER WILL BE ALLOWED FOR RELOCATING CONDUIT DUE TO THE LACK OF COORDINATION WITH ARCHITECT.

ELECTRICAL POWER AND
SYSTEMS KEYED NOTES

- ① PROVIDE AND INSTALL WIREMOLD 2 CHANNEL STEEL RACEWAY ON WORK TABLE. INSTALL RECEPTACLES AND DATA OUTLETS AS INDICATED. PROVIDE WIREMOLD DUAL CHANNEL RACEWAY FOR FLOOR CONNECTION TO TABLE.
- ② INSTALL 225A/3P CIRCUIT BREAKER IN EXISTING MSB.
- ③ MEZZANINE ELEVATOR - VERIFY FINAL LOCATION.

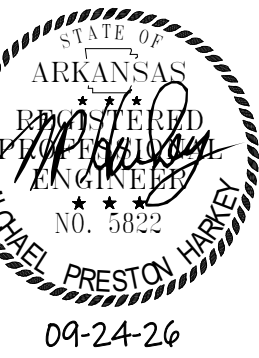

PSW Job Number:
699H

SERVICE
CENTER
WAREHOUSE
ADDITION
LITTLE ROCK, ARKANSAS


PERMIT AND BID ISSUE
Issue Date:
9/24/2026

REVISIONS		
NUMBER	DATE	DESCRIPTION


Contents:
FLOOR PLAN -
WAREHOUSE
ADDITION POWER
AND SYSTEMS

THIS PAGE IS BEST
VIEWED IN COLOR

E102

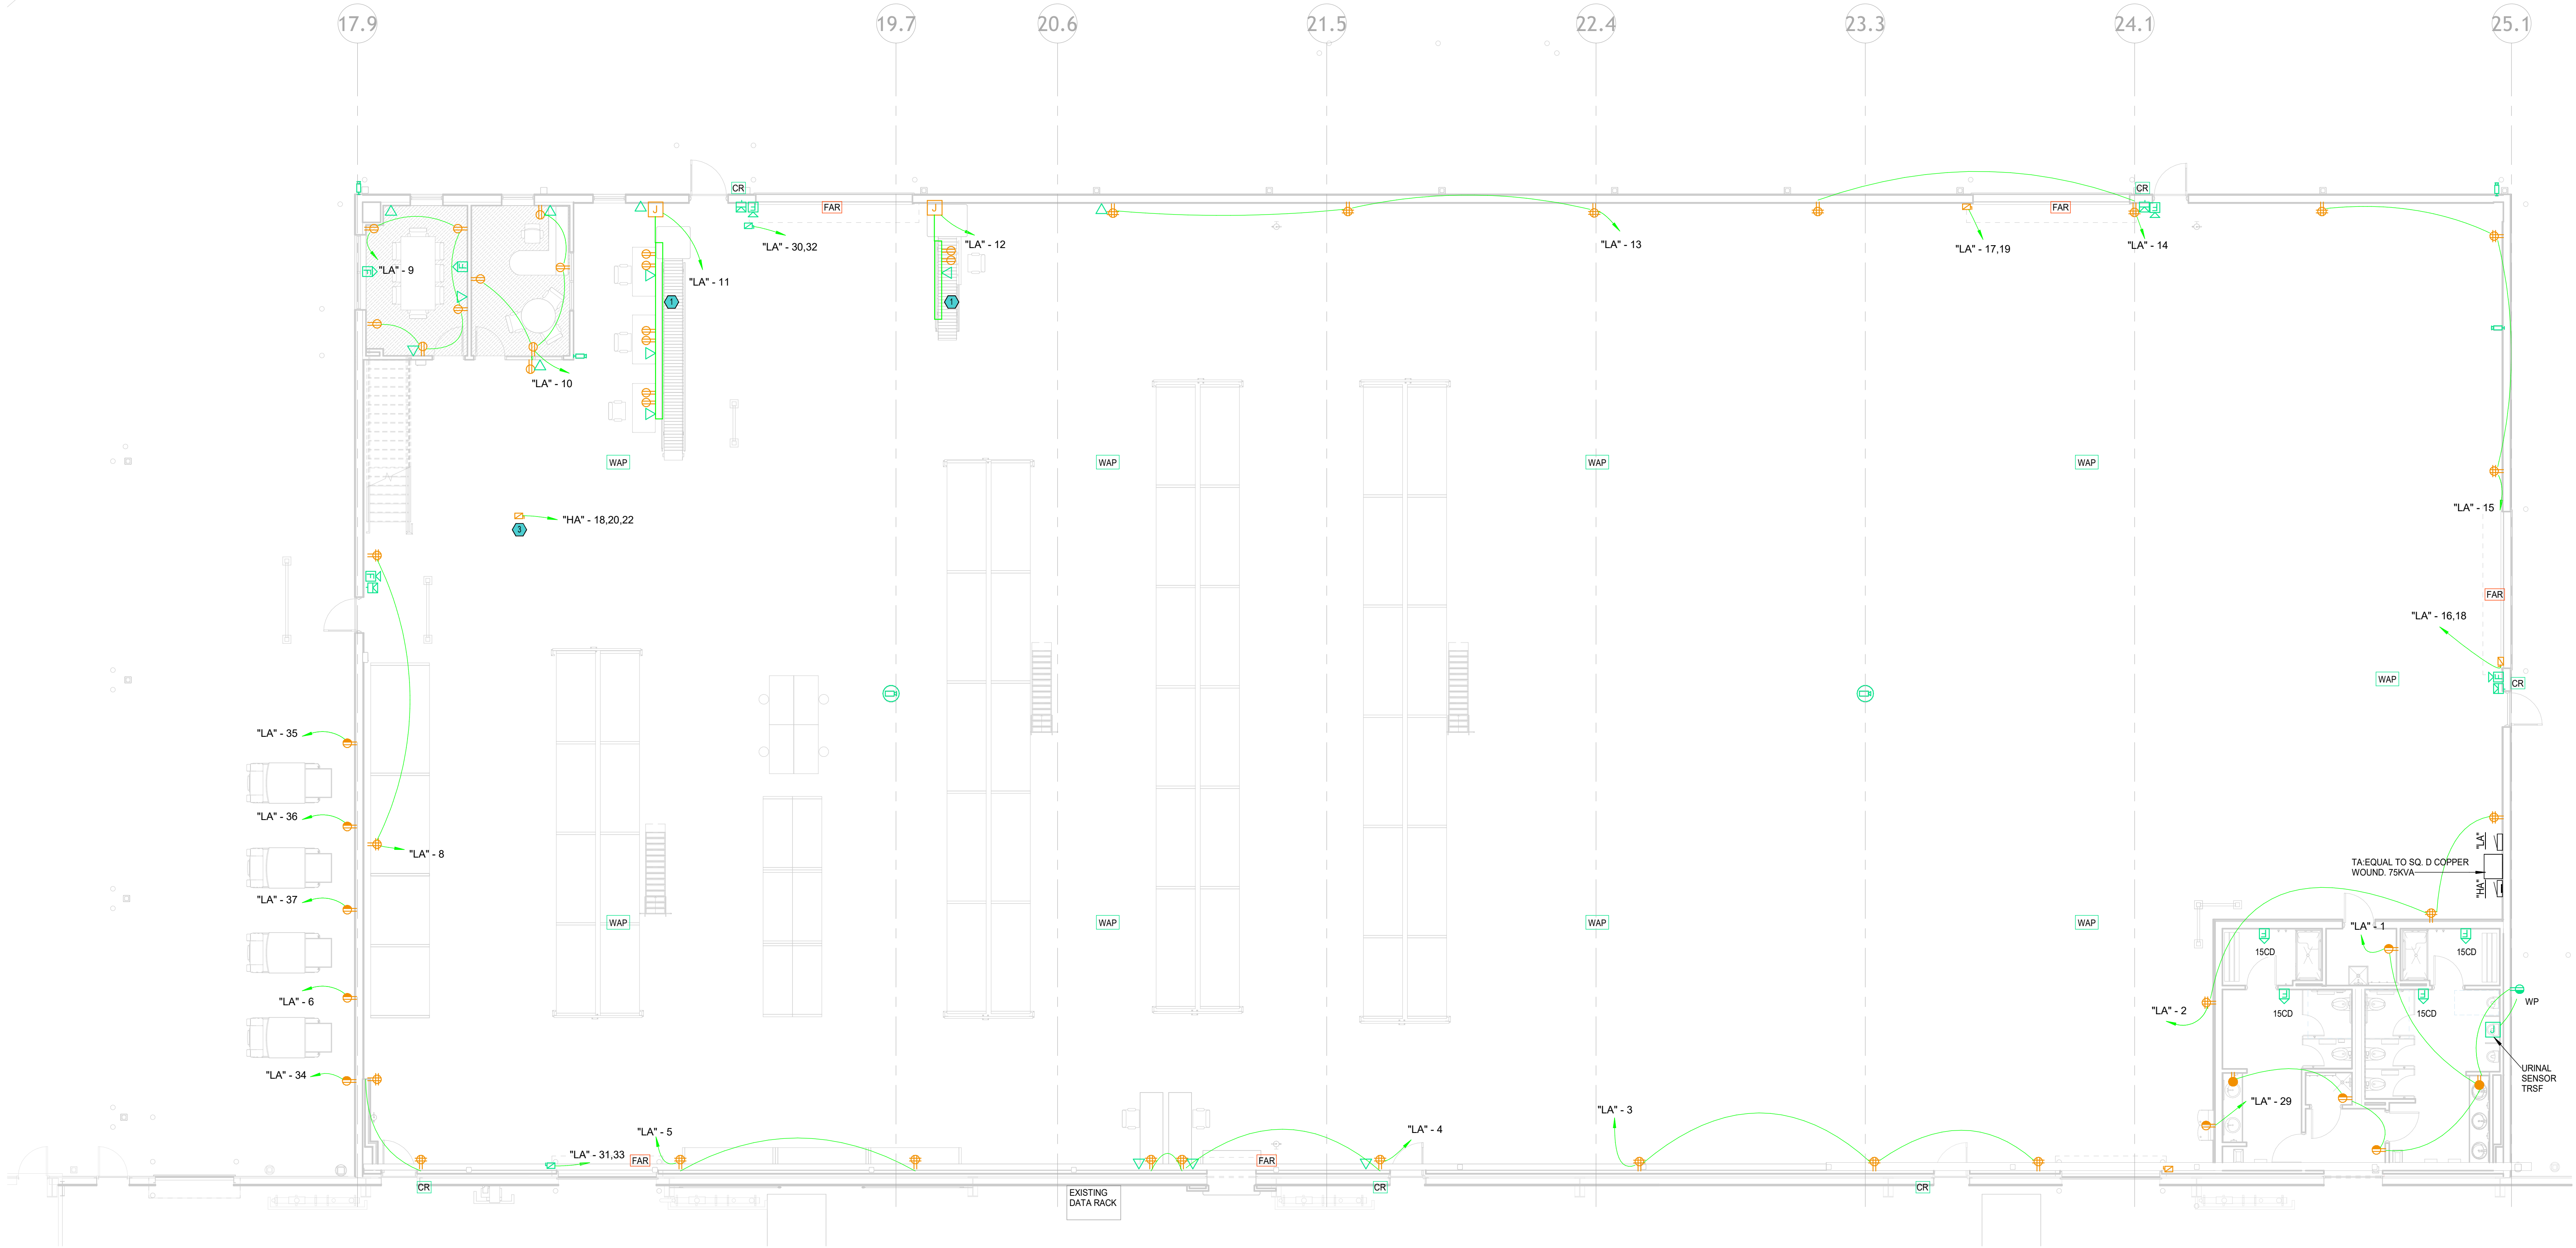

1 WAREHOUSE ADDITION POWER AND SYSTEMS PLAN
1/8" = 1'-0"

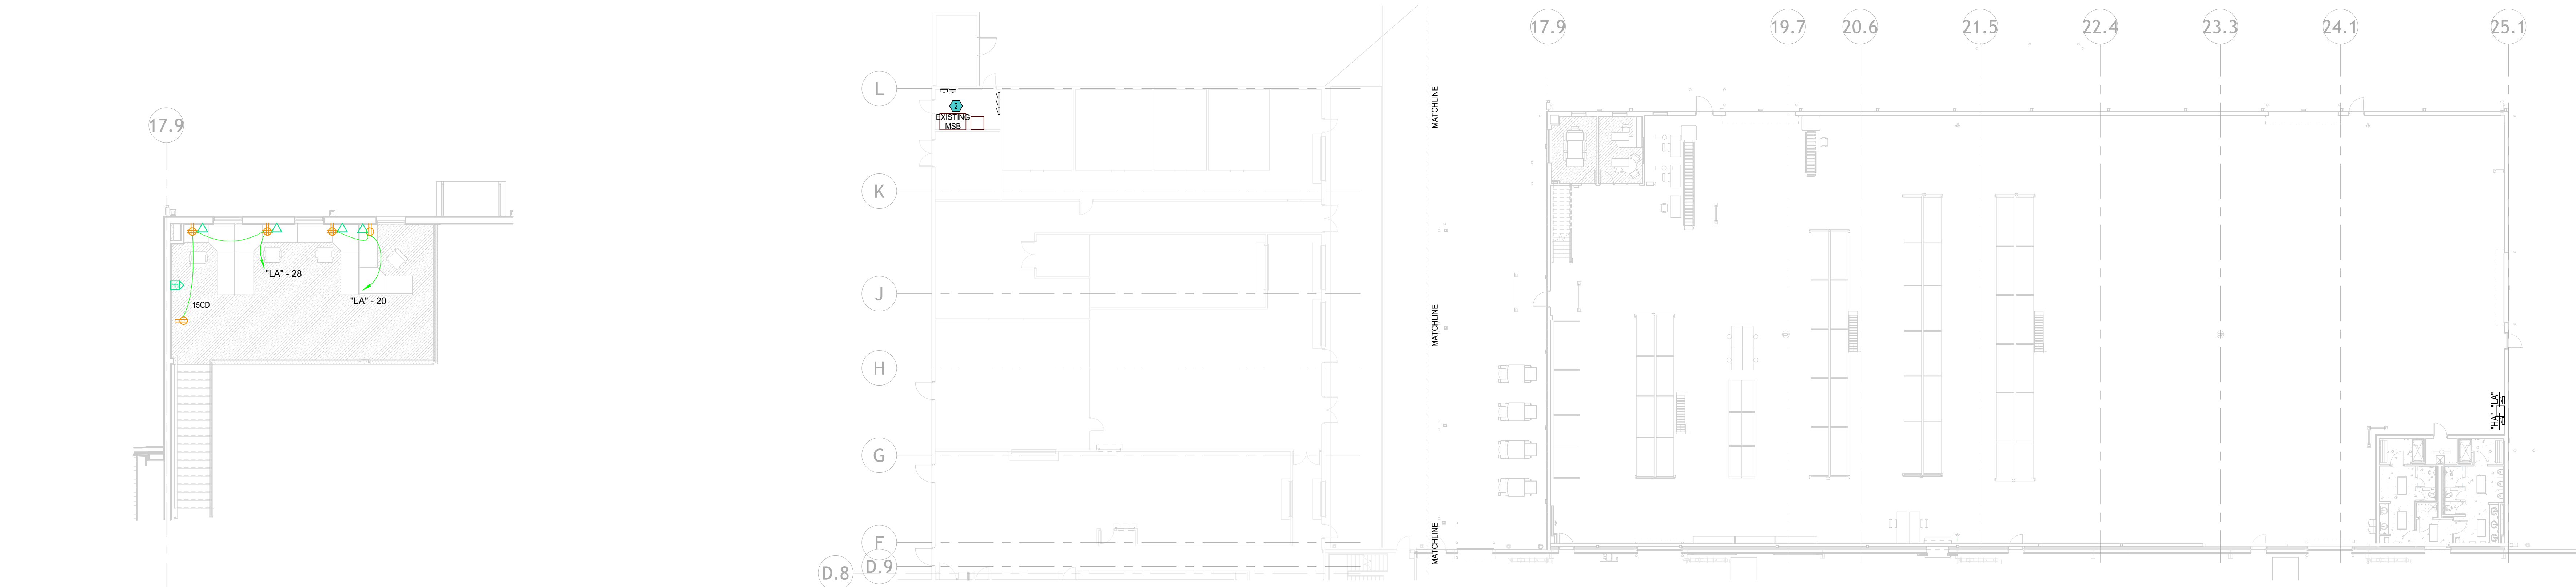

2 WAREHOUSE MEZZ POWER AND SYSTEMS PLAN
1/8" = 1'-0"

3 WAREHOUSE ADDITION MAIN SWITCHBOARD LOCATION
1/16" = 1'-0"