


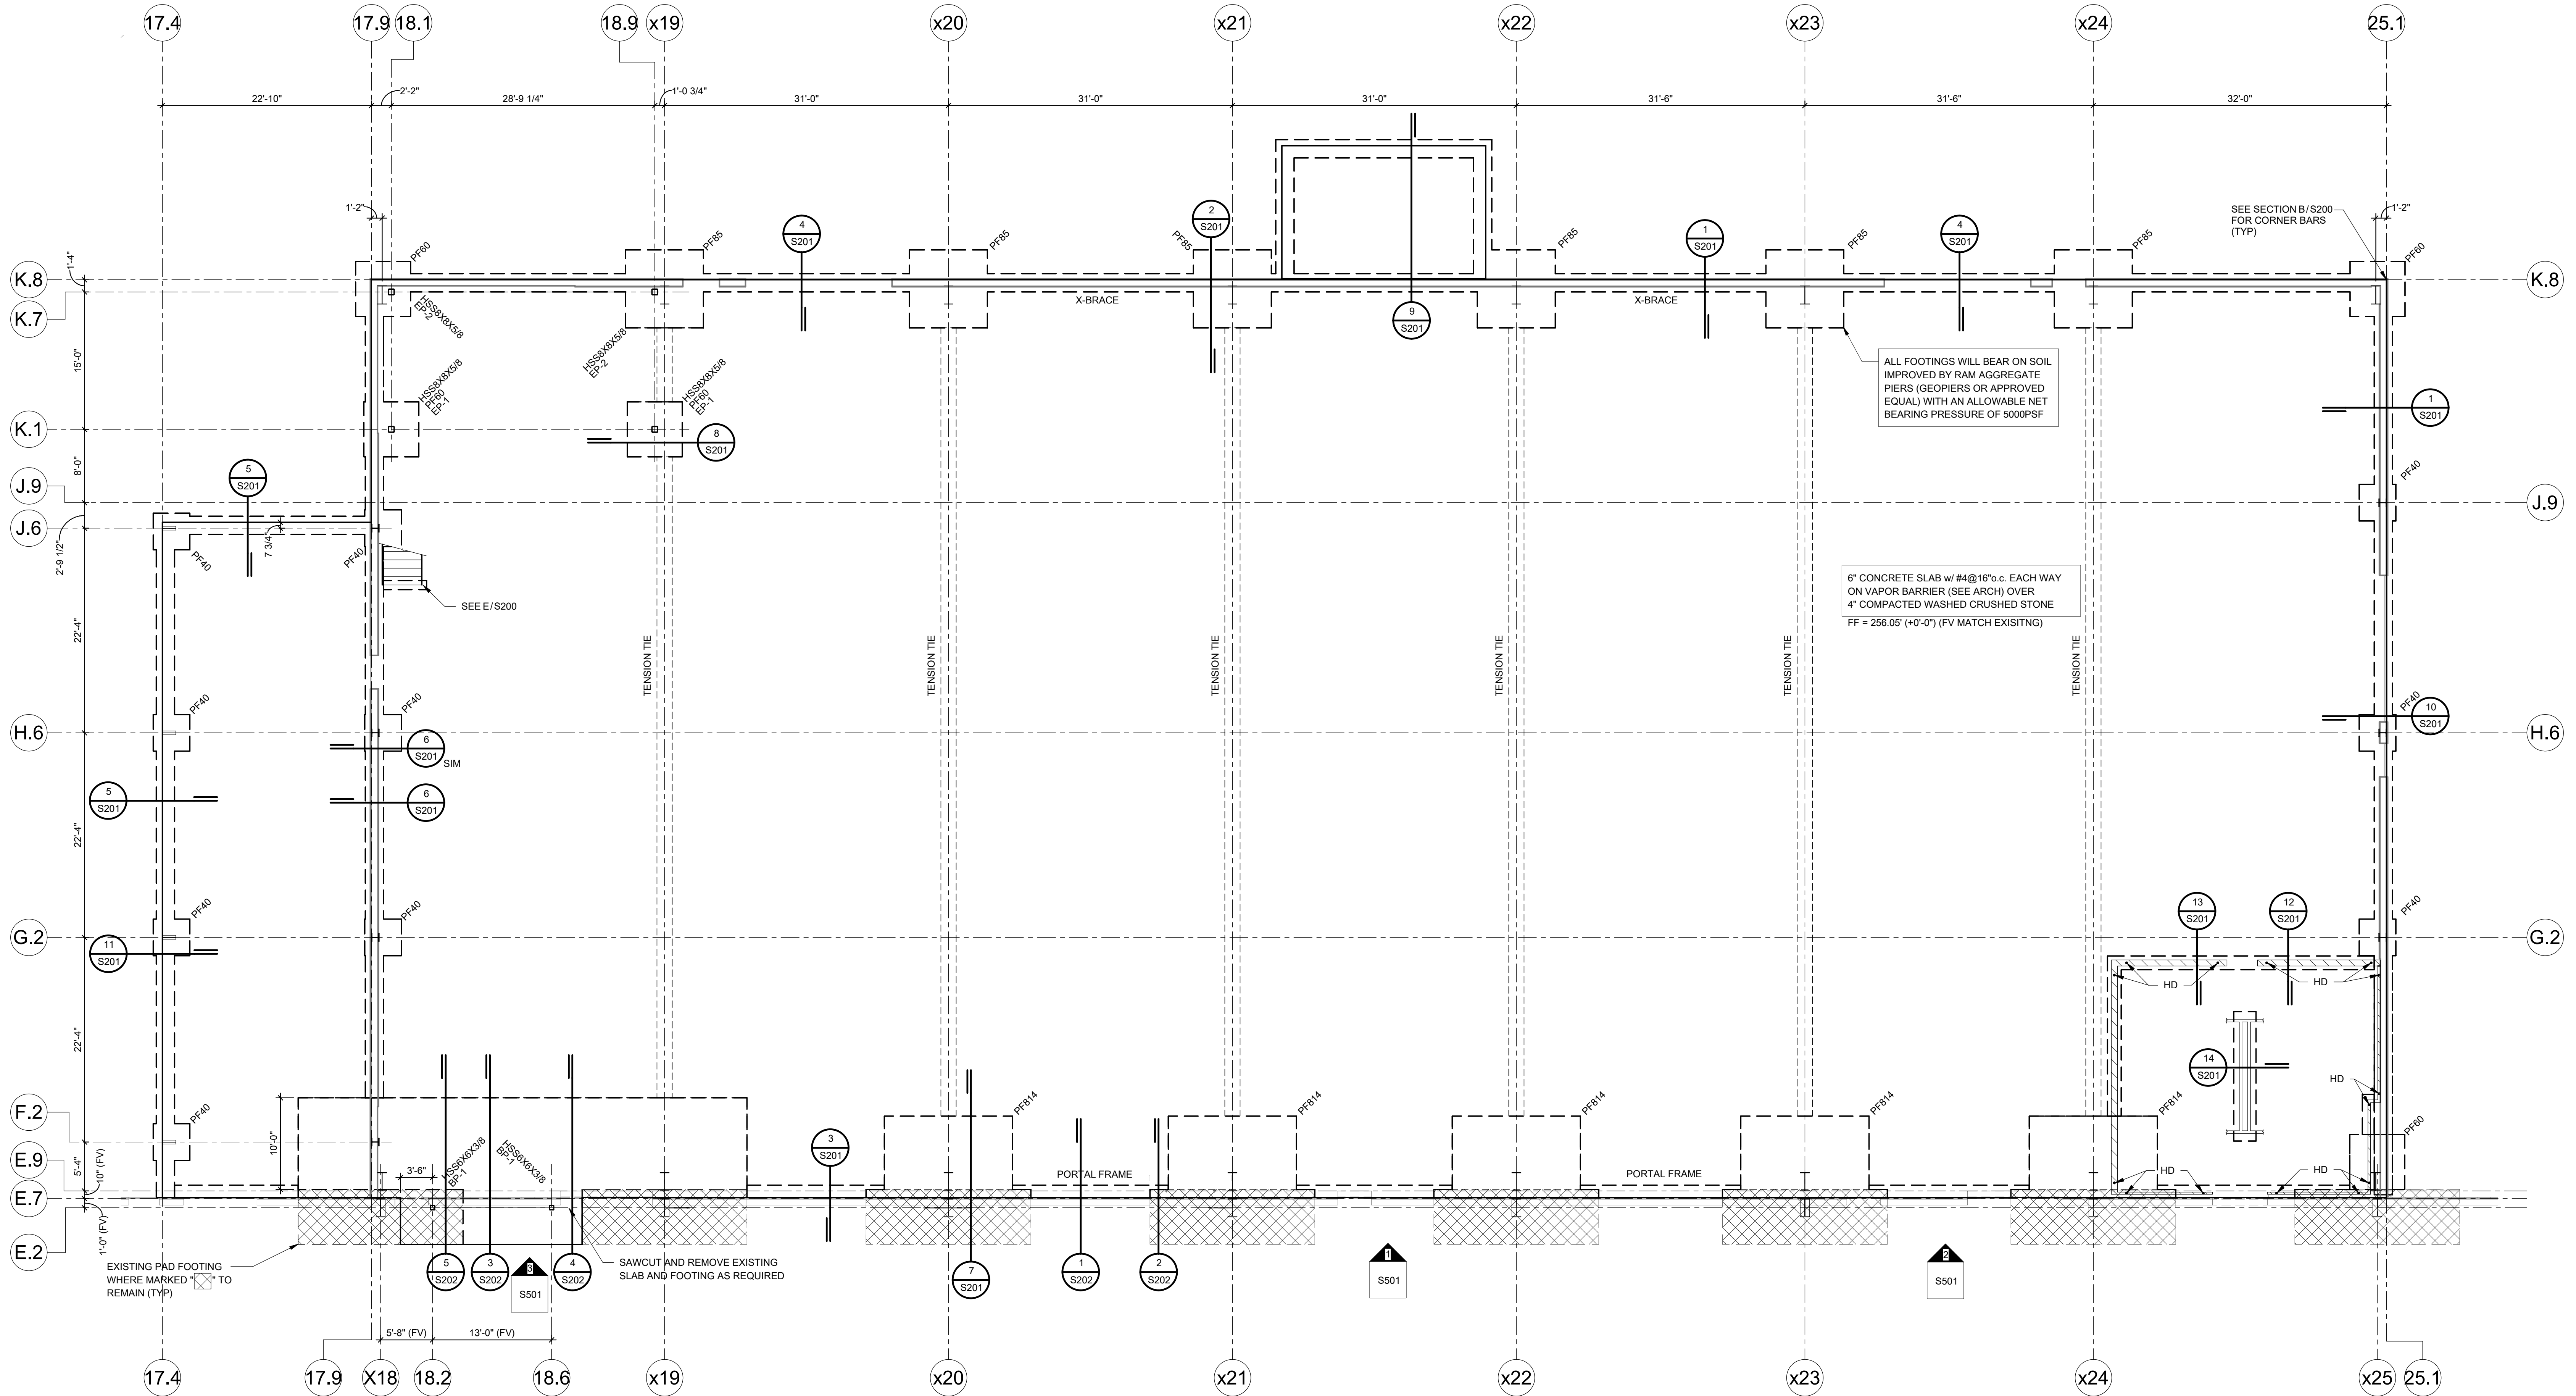

SHEAR WALL CONSTRUCTION SCHEDULE		
MARK	SHEATHING	ATTACHMENT
	5/8" GYPSUM WALL BOARD	#6 SCREWS @ 7"o.c. @ ALL PANEL EDGES AND 7"o.c. @ INTERIOR SUPPORTS. BLOCK ALL PANEL EDGES

PAD FOOTING SCHEDULE				
TYPE	WIDTH	LENGTH	THICKNESS	TYPE COMMENTS
PF40	4'-0"	4'-0"	1'-4"	(5) #5 EW (TOP&BOT)
PF60	6'-0"	6'-0"	1'-4"	(7) #5 EW (TOP&BOT)
PF85	8'-6"	8'-6"	1'-4"	(9) #6 EW (TOP&BOT)
PF814	14'-0"	8'-0"	1'-0"	(11) #7 EW (TOP&BOT)