
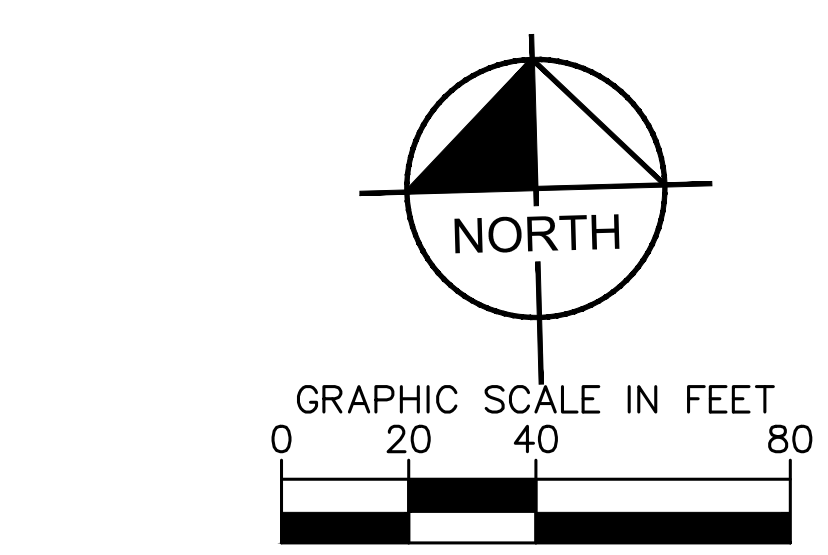








LEGEND	
	PROPERTY LINE
	FIRE LANE STRIPING
	PARKING COUNT
	CURB RAMP NOT IN PUBLIC ROW
	ACCESSIBILITY SPACE
PAVING MATERIAL LEGEND	
	STANDARD DUTY CONCRETE
	MEDIUM DUTY CONCRETE
	HEAVY DUTY CONCRETE
	CONCRETE SIDEWALK
	STRUCTURAL SLABS

KEYED NOTES	
①	PROPOSED MAIN DOOR IN SCREEN WALL (REF ARCHITECTURAL PLANS FOR DETAILS AND SPECIFICATIONS)
②	PROPOSED GATE (REF ARCHITECTURAL PLANS FOR DETAILS AND SPECIFICATIONS)
③	PARKING LOT STRIPING, 4" SOLID WHITE STRIPE
④	PROPOSED 6" CURB.
⑤	END OF 6" CURB. INSTALL CURB TERMINATION.
⑥	4" SOLID WHITE STRIPING, 2'-0" O.C. @ 45°
⑦	PROPOSED ACCESSIBLE HC PARKING STALL WITH ACCESSIBLE PARKING SYMBOL AND SIGN
⑧	ACCESSIBLE RAMP
⑨	FIRE HYDRANT
⑩	PROPOSED SAWCUT/MATCH EXISTING PAVEMENT LINE
⑪	PROPOSED PIPE BOLLARD (CONTRACTOR TO NOTIFY ENGINEER FOR RELOCATION IN THE EVENT OF A CONFLICT WITH UTILITIES, FOUNDATION, ETC)
⑫	PROPOSED GENERATOR PAD (REF. STRUCTURAL PLANS FOR DETAILS AND SPECIFICATIONS AND THE GEOTECHNICAL REPORT FOR PAD PREPARATION
⑬	PROPOSED 8' ANTI-CLIMB FENCING (1 COCHRANE CLEARVU AMERISTAR MONTAGE II) OR AMERISTAR IMPASSE II)
⑭	PROPOSED 8' HIGH CONTINUOUS RIBBON CHAIN-LINK FENCE WITH 3 STRAND BARBED WIRE TOP
⑮	PROPOSED SECURITY GATE (REF ARCHITECTURAL PLANS FOR DETAILS AND SPECIFICATIONS)
⑯	PROPOSED SCREEN WALL (REFERENCE ARCH. AND STRUCTURAL PLANS FOR DETAILS AND SPECIFICATIONS)

GENERAL NOTES

1. DIMENSIONS ARE TO FACE OF CURB UNLESS OTHERWISE NOTED.
2. ALL RADII 3' UNLESS OTHERWISE NOTED.
3. REFER TO ARCHITECTURAL PLANS FOR SITE LIGHTING POLES AND FIXTURES AND ELECTRICAL PLAN FOR PLACING PLANT.
4. REFER TO ARCHITECTURAL PLANS FOR EXACT BUILDING DIMENSIONS.
5. SIDEWALKS TO HAVE A 5% MAXIMUM RUNNING SLOPE AND A 2% MAXIMUM CROSS SLOPE IN ACCORDANCE WITH ADA REQUIREMENTS.
6. FIELD VERIFY ADA GRADES PRIOR TO PLACING PAVEMENT. CONTRACTOR SHALL CONSTRUCT ALL ACCESSIBLE ROUTES IN ACCORDANCE WITH ADA STANDARDS AND TAS.
7. REF. IRRIGATION PLANS PRIOR TO PLACING PAVEMENT.
8. CONTRACTOR SHALL BUDGET FOR ACCESSIBLE STALL STRIPING, FIRE LANE STRIPING, DIRECTIONAL ARROWS, ETC.
9. SITE LIGHTING IS BY OTHERS. REF. SITE LIGHTING PLANS FOR LOCATIONS AND DETAILS PRIOR TO PLACING PAVEMENT.
10. REF. BUILDING PLANS FOR ALL EXTERIOR STAIR DETAILS.
11. CONTRACTOR TO ADJUST EXISTING SANITARY SEWER MANHOLES, STORM SEWER MANHOLES, ELECTRICAL MARE HYDRANTS, VALVE BOXES, WATER METERS, ETC. TO MATCH PROPOSED FINISHED GRADES IF NECESSARY.



CAUTION!!

EXISTING UNDERGROUND UTILITIES IN THE AREA
CONTRACTOR IS RESPONSIBLE FOR DETERMINING THE
HORIZONTAL AND VERTICAL LOCATION OF ALL UTILITIES
PRIOR TO CONSTRUCTION. CONTRACTOR SHALL BE
RESPONSIBLE FOR ANY REPAIRS TO EXISTING UTILITIES DUE
TO DAMAGE INCURRED DURING CONSTRUCTION.
CONTRACTOR SHALL NOTIFY THE ENGINEER OF ANY
DISCREPANCIES ON THE PLANS.