CAST-IN-PLACE DRILLED PIER SCHEDULE					
MARK	DIAMETER	VERTICAL REINFORCEMENT	VERTICAL REINFORCEMENT LENGTH	TIE REINFORCEMENT	REMARKS
DP1	3' - 0"	(7) #8	10'-0"	#3@16" OC	-
DP2	4' - 0"	(7) #10	12'-0"	#4@18" OC	-

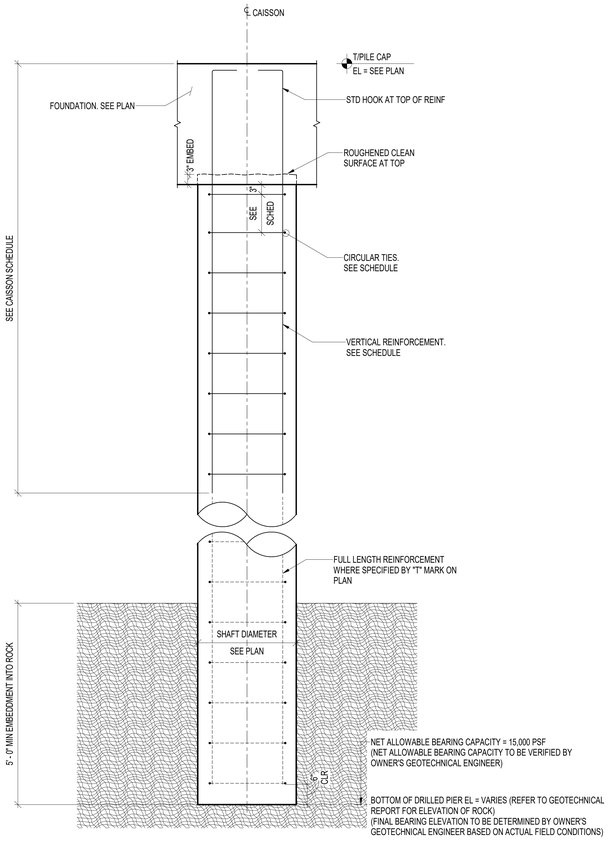

1 TYPICAL DRILLED PIER ELEVATION

SCALE: NTS

NOTES:

1. REFER TO THE GEOTECHNICAL REPORT REFERENCED IN THE STRUCTURAL NOTES FOR ADDITIONAL INFORMATION.



2 TYPICAL DRILLED PIER SHAFT DETAIL

SCALE: NTS

serverfarm

CORGAN

TGRWA STRUCTURAL ENGINEERS

kW Mission Critical Engineering Member of WSP

EP ENGINEERING PLUS

Kimley»Horn

ISSUES		
1		
2		
3		
4	01/23/2026	DESIGN DEVELOPMENT
5		
6		
7		
8		
9		
10		
11		
12		
13		

REVISIONS

NOT FOR CONSTRUCTION

This document is incomplete and may not be used for regulatory approval, permit or construction.

Date of issue: 01/23/2026

SF - ARK01
DESIGN DEVELOPMENT

CLARKSVILLE, AR 72830

FOUNDATION DETAILS

JOB 25131

SHEET

S04-02

1/22/2026 4:22:51 PM S04-02 FOUNDATION DETAILS