


1/23/2026 12:55:44 PM E03-02G LEVEL 2 - GROUNDING PLAN - SEGMENT G

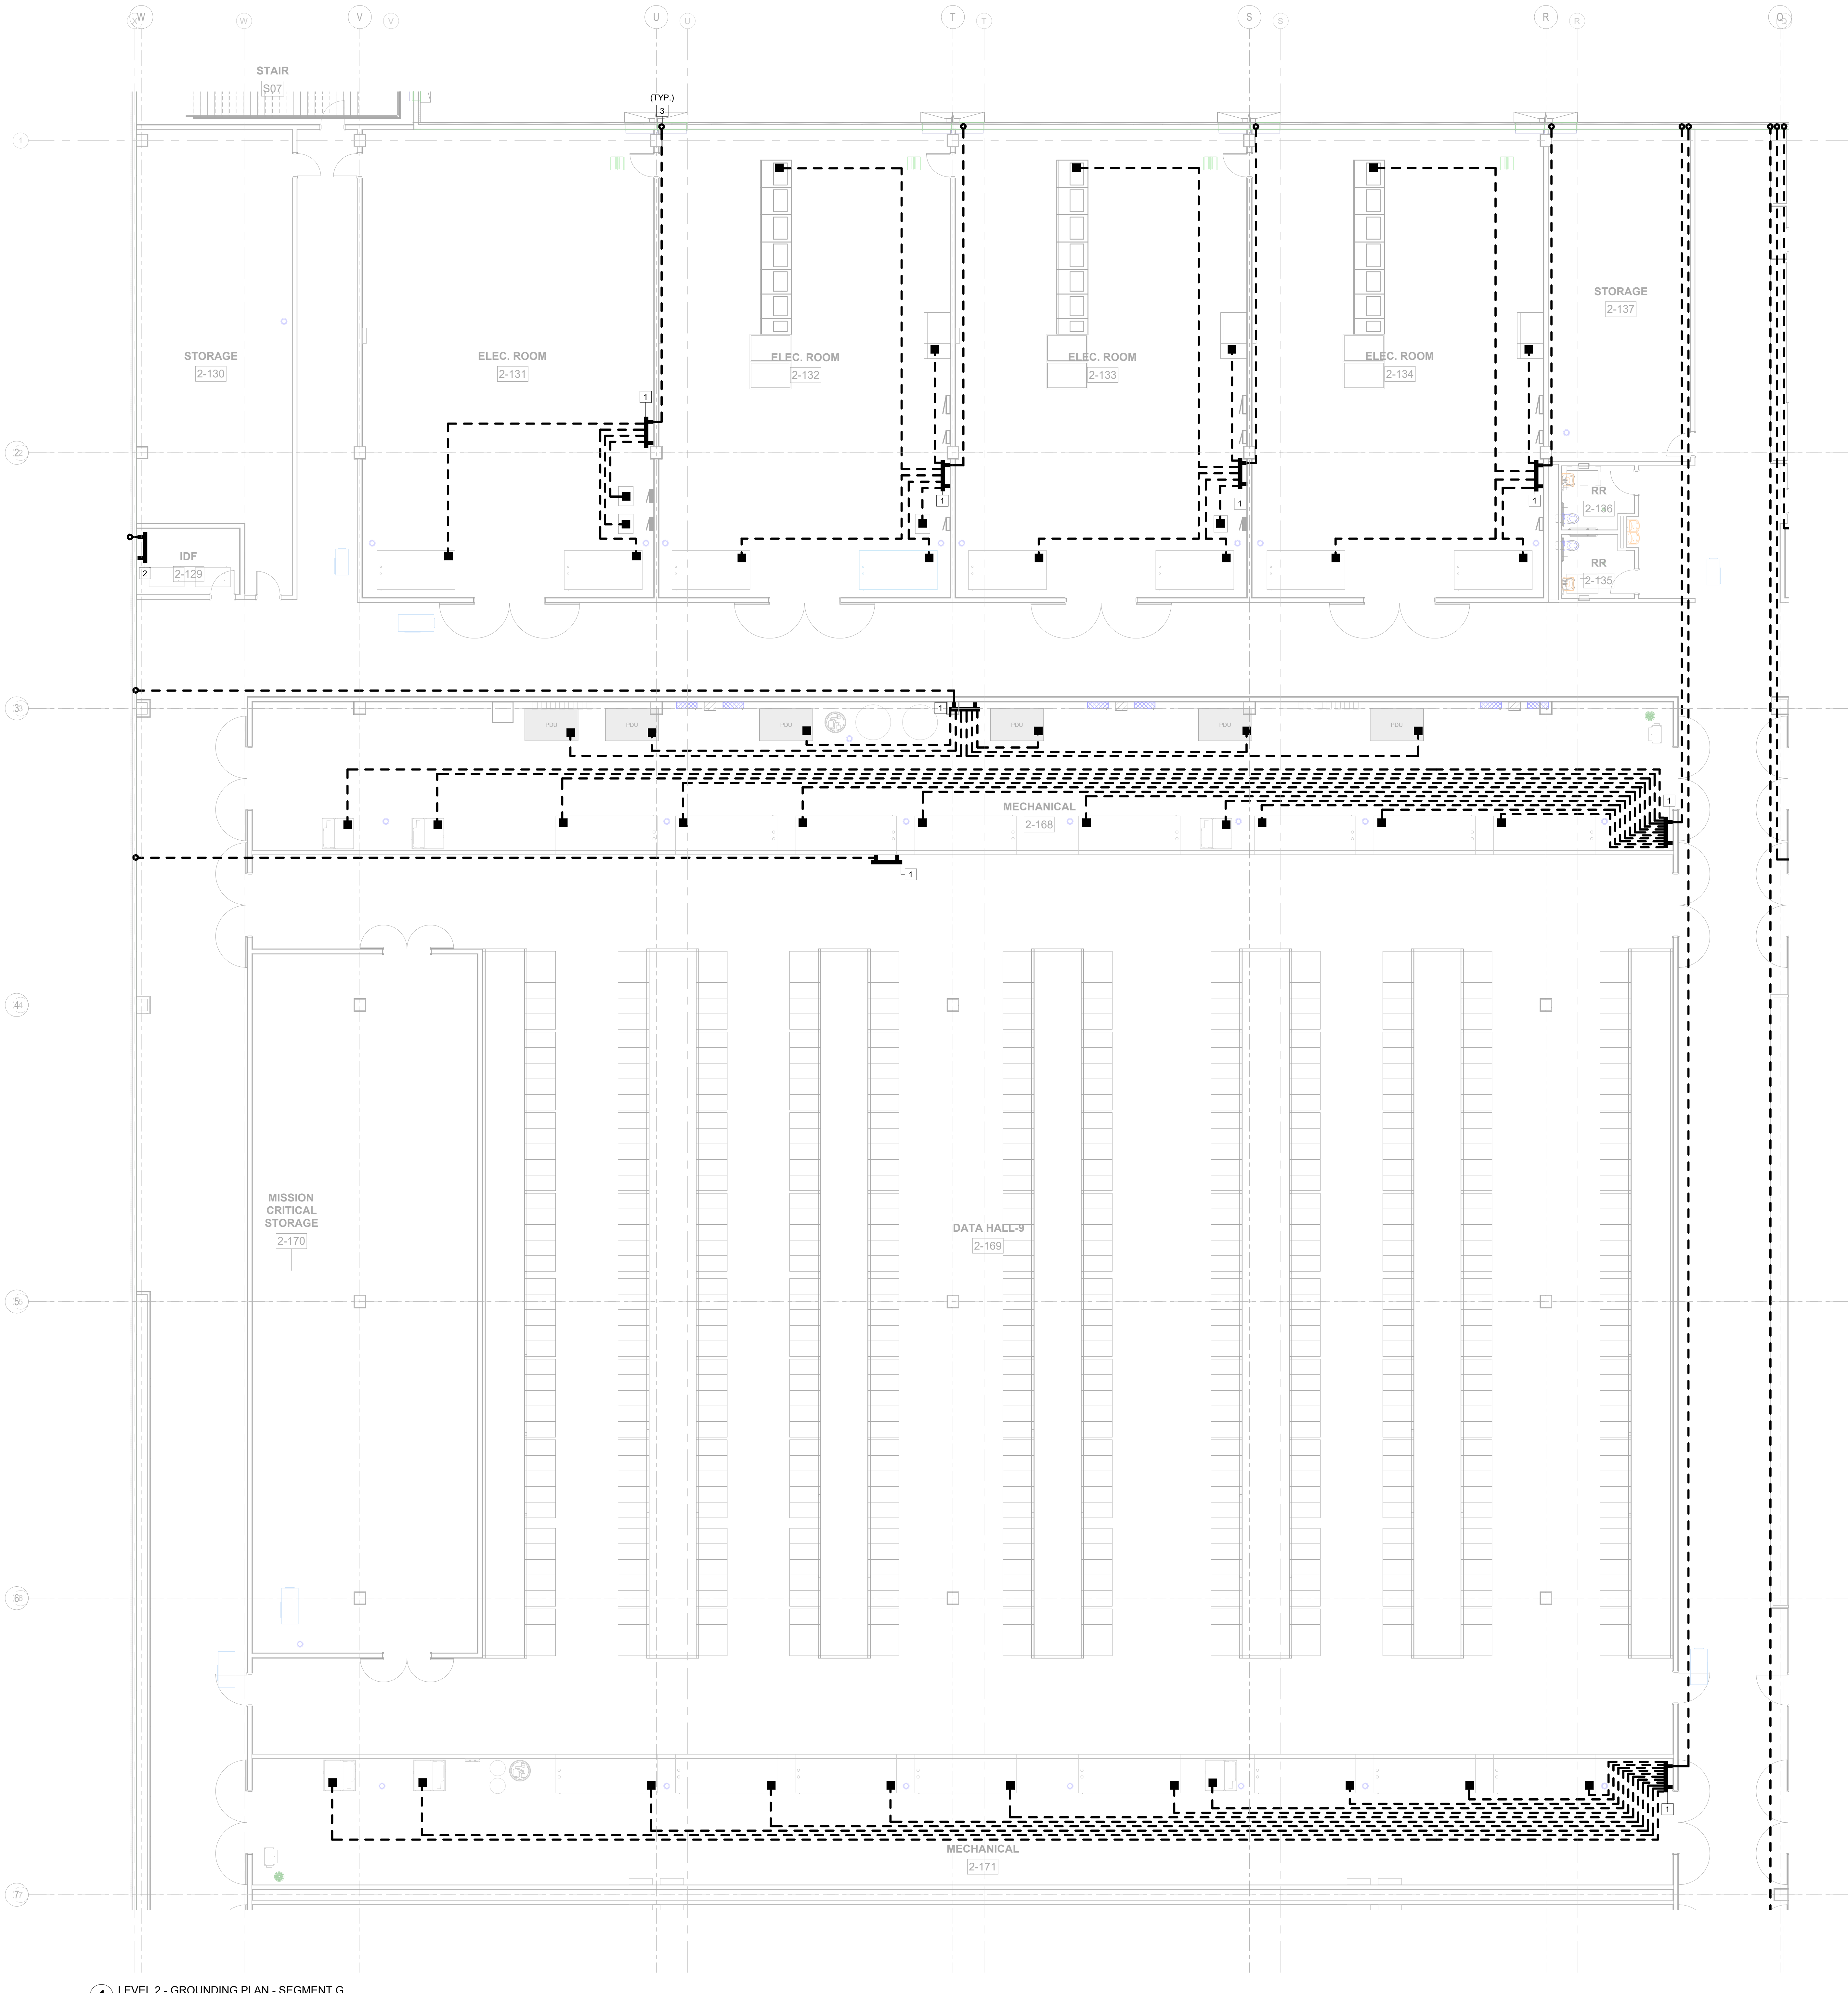

1 LEVEL 2 - GROUNDING PLAN - SEGMENT G
1/8" = 1'-0"

serverfarm

CORGAN

TGRWA

STRUCTURAL ENGINEERS

Mission Critical Engineering

Member of WSP

Engineering

PLUS

Kimley

Horn

GENERAL NOTES

1. THESE REQUIREMENTS ARE IN ADDITION TO SPECIFICATIONS SECTION 260528 "GROUNDING & BONDING".

2. CONTACT SURFACES SHALL BE CLEANED OF CONTAMINANTS SUCH THAT DIRECT METAL TO METAL CONTACT IS MADE.

3. GROUNDING CONDUCTORS, LUGS, CONNECTORS, ETC SHALL BE COPPER, TINNED COPPER OR SILVER PLATED COPPER FOR GROUND BARS.

4. MOUNTING HARDWARE SHALL BE TORQUED PER MANUFACTURERS SPECIFICATIONS. SHOW TORQUE MARKS AND LOG ALL TORQUE VALUES.

5. LUGS SHALL BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS. USE ONLY SPECIFIC TOOL AND DIE ONLY. NO UNIVERSAL CRIMPING TOOLS ALLOWED.

6. THREADED PRESSURE CONNECTORS SHALL NOT BE USED.

7. CONDUCTORS SHALL BE EQUIPPED WITH A PRINTED DESTINATION TAG. REFER TO DETAILS.

8. MULTIPLE CONNECTORS SHALL NOT BE SECURED BY THE SAME BOLT ASSEMBLY.

9. SECURE CONDUIT WITH NONMETALLIC CLAMPS TO ELIMINATE GROUND "CHOKES".

10. SUPPORT BARE COPPER GROUND CONDUCTORS EVERY 12".

11. BENDING RADIUS OF GROUNDING CONDUCTORS SHALL BE GREATER THAN 12" AND NO CASE SHALL THE INCLUDED BENDING ANGLE BE LESS THAN 90 DEGREES.

12. CONTRACTOR SHALL APPLY A "NO-OX" COATING BETWEEN ALL CONNECTIONS.

13. GROUND LUGS SHALL HAVE SHRINK WRAP INSULATION 2" BEYOND THE END OF LUG.

14. CABLE INSULATION SHALL NOT BE MORE THAN 0.2" FROM THE LUG.

15. LABEL ALL GROUND BARS WITH PERMANENTLY ENGRAVED NAMEPLATES.

16. GROUND BAR CONDUCTORS SHALL NOT SHARE CONDUIT OR PULL BOXES WITH CONDUCTORS OF OTHER SYSTEMS.

17. GROUND CABLES TO INCLUDE COUNTERPOISE CABLES SHALL BE BURIED IN UNDISTURBED EARTH.

18. COORDINATE LIGHTNING PROTECTION SYSTEM DOWN LEADS WITH GROUND COUNTERPOISE AND PRECAST PANELS. DOWN LEADS SHALL BE INSTALLED BETWEEN PRECAST PANELS. PROVIDE ACCESS FOR LIGHTNING PROTECTION CONTRACTOR TO TERMINATE DOWN LEADS ON GROUND RING. UNDER NO CIRCUMSTANCES SHALL BUILDING COLUMNS BE USED AS DOWN CONDUCTORS.

19. BURIED AND INACCESSIBLE CONNECTIONS SHALL BE MADE VIA EXOTHERMIC WELDS, OR HIGH PRESSURE IRREVERSIBLE CRIMPS.

20. ALL GROUNDING CONDUCTORS SHALL BE #20 BARE COPPER UNLESS OTHERWISE INDICATED.

21. REFER TO GROUNDING DETAILS FOR ADDITIONAL INFORMATION.

22. REFER TO LIGHTNING PROTECTION PLANS FOR ADDITIONAL GROUNDING REQUIREMENTS.

KEYED NOTES

1. POWER GROUND BARS SHALL BE CONNECTED DIRECTLY TO THE GROUND LOOPS WITH #10 BARE COPPER CONDUCTORS INSTALLED AT LEAST 24" UNDERGROUND BELOW FINISHED FLOOR. EQUIPMENT SHALL BE BONDED TO THE POWER GROUND BAR WITH #20 GREEN INSULATED COPPER CONDUCTOR.

2. INSTALL TELECOM GROUND BARS AT THIS LOCATION. THESE GROUND BARS SHALL NOT BE USED FOR ANY ELECTRICAL OR MECHANICAL EQUIPMENT GROUNDS. COORDINATE WITH TELECOM FOR FINAL INSTALL LOCATION AND TERMINATIONS.

3. RUN #10 BARE COPPER CONDUCTOR IN PVC CONDUIT FROM GROUND LEVEL GROUND RING TO SECOND LEVEL GROUND BAR. EXACT LOCATION TO BE FIELD COORDINATED BY THE CONTRACTOR.

ISSUES

1 11/12/2025 CONCEPTUAL DESIGN

2 12/12/2025 SCHEMATIC DESIGN

3 12/17/2025 STEEL MILL ORDER

4 1/23/2026 DESIGN DEVELOPMENT

REVISIONS

kW Mission Critical Engineering
Contact: David Adams Phone: 703.928.0715
Engineer: Matthew Fagert License #: 123456 Exp. Date: 00/00/0000

NOT FOR CONSTRUCTION

Date: 00/00/0000

SERVERFARM

Clarksville, AR

L	K	J
G	E	C
H	F	D
P	N	M

LEVEL 2 -
GROUNDING PLAN
- SEGMENT G

JOB US0049903.5614
SHEET

E03-02G