

1. REFER TO SPECIFICATION 23 09 00 FOR CONTROLS RELATED INSTALLATION REQUIREMENTS.
2. REFER TO SPECIFICATION 23 09 03 FOR SEQUENCE OF OPERATIONS.
3. REFER TO ELECTRICAL PROJECT SPECIFICATIONS FOR ALL WIRING INSTALLATION REQUIREMENTS.
4. INSTALL FLEXIBLE CONNECTIONS IN RUNS OF RACEWAYS, CABLES, WIREWAYS, CABLE TRAYS, AND BUNDLES WHERE THE TRAYS OR CABLES JOIN SEISMIC JOINTS, OR ARE SUBJECT TO STRUCTURAL DEFLECTIONS OR INTERSTORY BUILDING DRIFT.
5. PROVIDE A CONNECTOR THAT BE INSTALLED WHERE ADJACENT SECTIONS OF RACEWAYS ARE SUPPORTED BY DIFFERENT STRUCTURAL ELEMENTS WHERE THEY TERMINATE TO EQUIPMENT THAT IS ANCHORED TO A SUPPORTED TO A DIFFERENT STRUCTURAL ELEMENT. CONTRACTOR SHALL COORDINATE WITH MECHANICAL AND ELECTRICAL ENGINEERS IN ORDER TO PROVIDE THE REQUIRED FLEXIBLE CONNECTIONS.
6. CONTRACTOR SHALL COORDINATE INSTALLATION OF TIVITIVITY WITH OTHER CONTRACTORS AND OTHER TRADES AS NEEDED. THIS INCLUDES COORDINATING WITH OWNER LOCATION OF TIVITIVITY WITH OWNER PERMITS TO INCORPORATE ANY TENANT REQUIREMENTS FOR SENSORS.
7. INSTALLATION OF ALL THERMOSTATS AND DIFFERENTIAL TEMPERATURE SENSORS SHALL BE COORDINATED WITH ALL OTHER WALL DEVICES FOR INSTALLATION HEIGHT ABOVE FINISHED FLOOR.
8. CONTROL PANELS ARE FED FROM TWO SEPARATE 120VAC POWER SOURCES.
9. PROVIDE FIELD COORDINATION WITH SYSTEM INTEGRATOR ON ALL PANELS.
10. CONTROLS AND ELECTRICAL CONTRACTORS TO COORDINATE ALL ETHERNET COPPER AND FIBER CABLE WITH TELECOM.

[illegible][illegible][illegible]


NOT FOR CONSTRUCTION

SF - ARK01
DESIGN DEVELOPMENT
CLARKSVILLE, AR 72830

L	K	J	
G	E	C	A
H	F	D	E
P	N	M	

JOB US0049903.5614
SHEET

IC02-01C

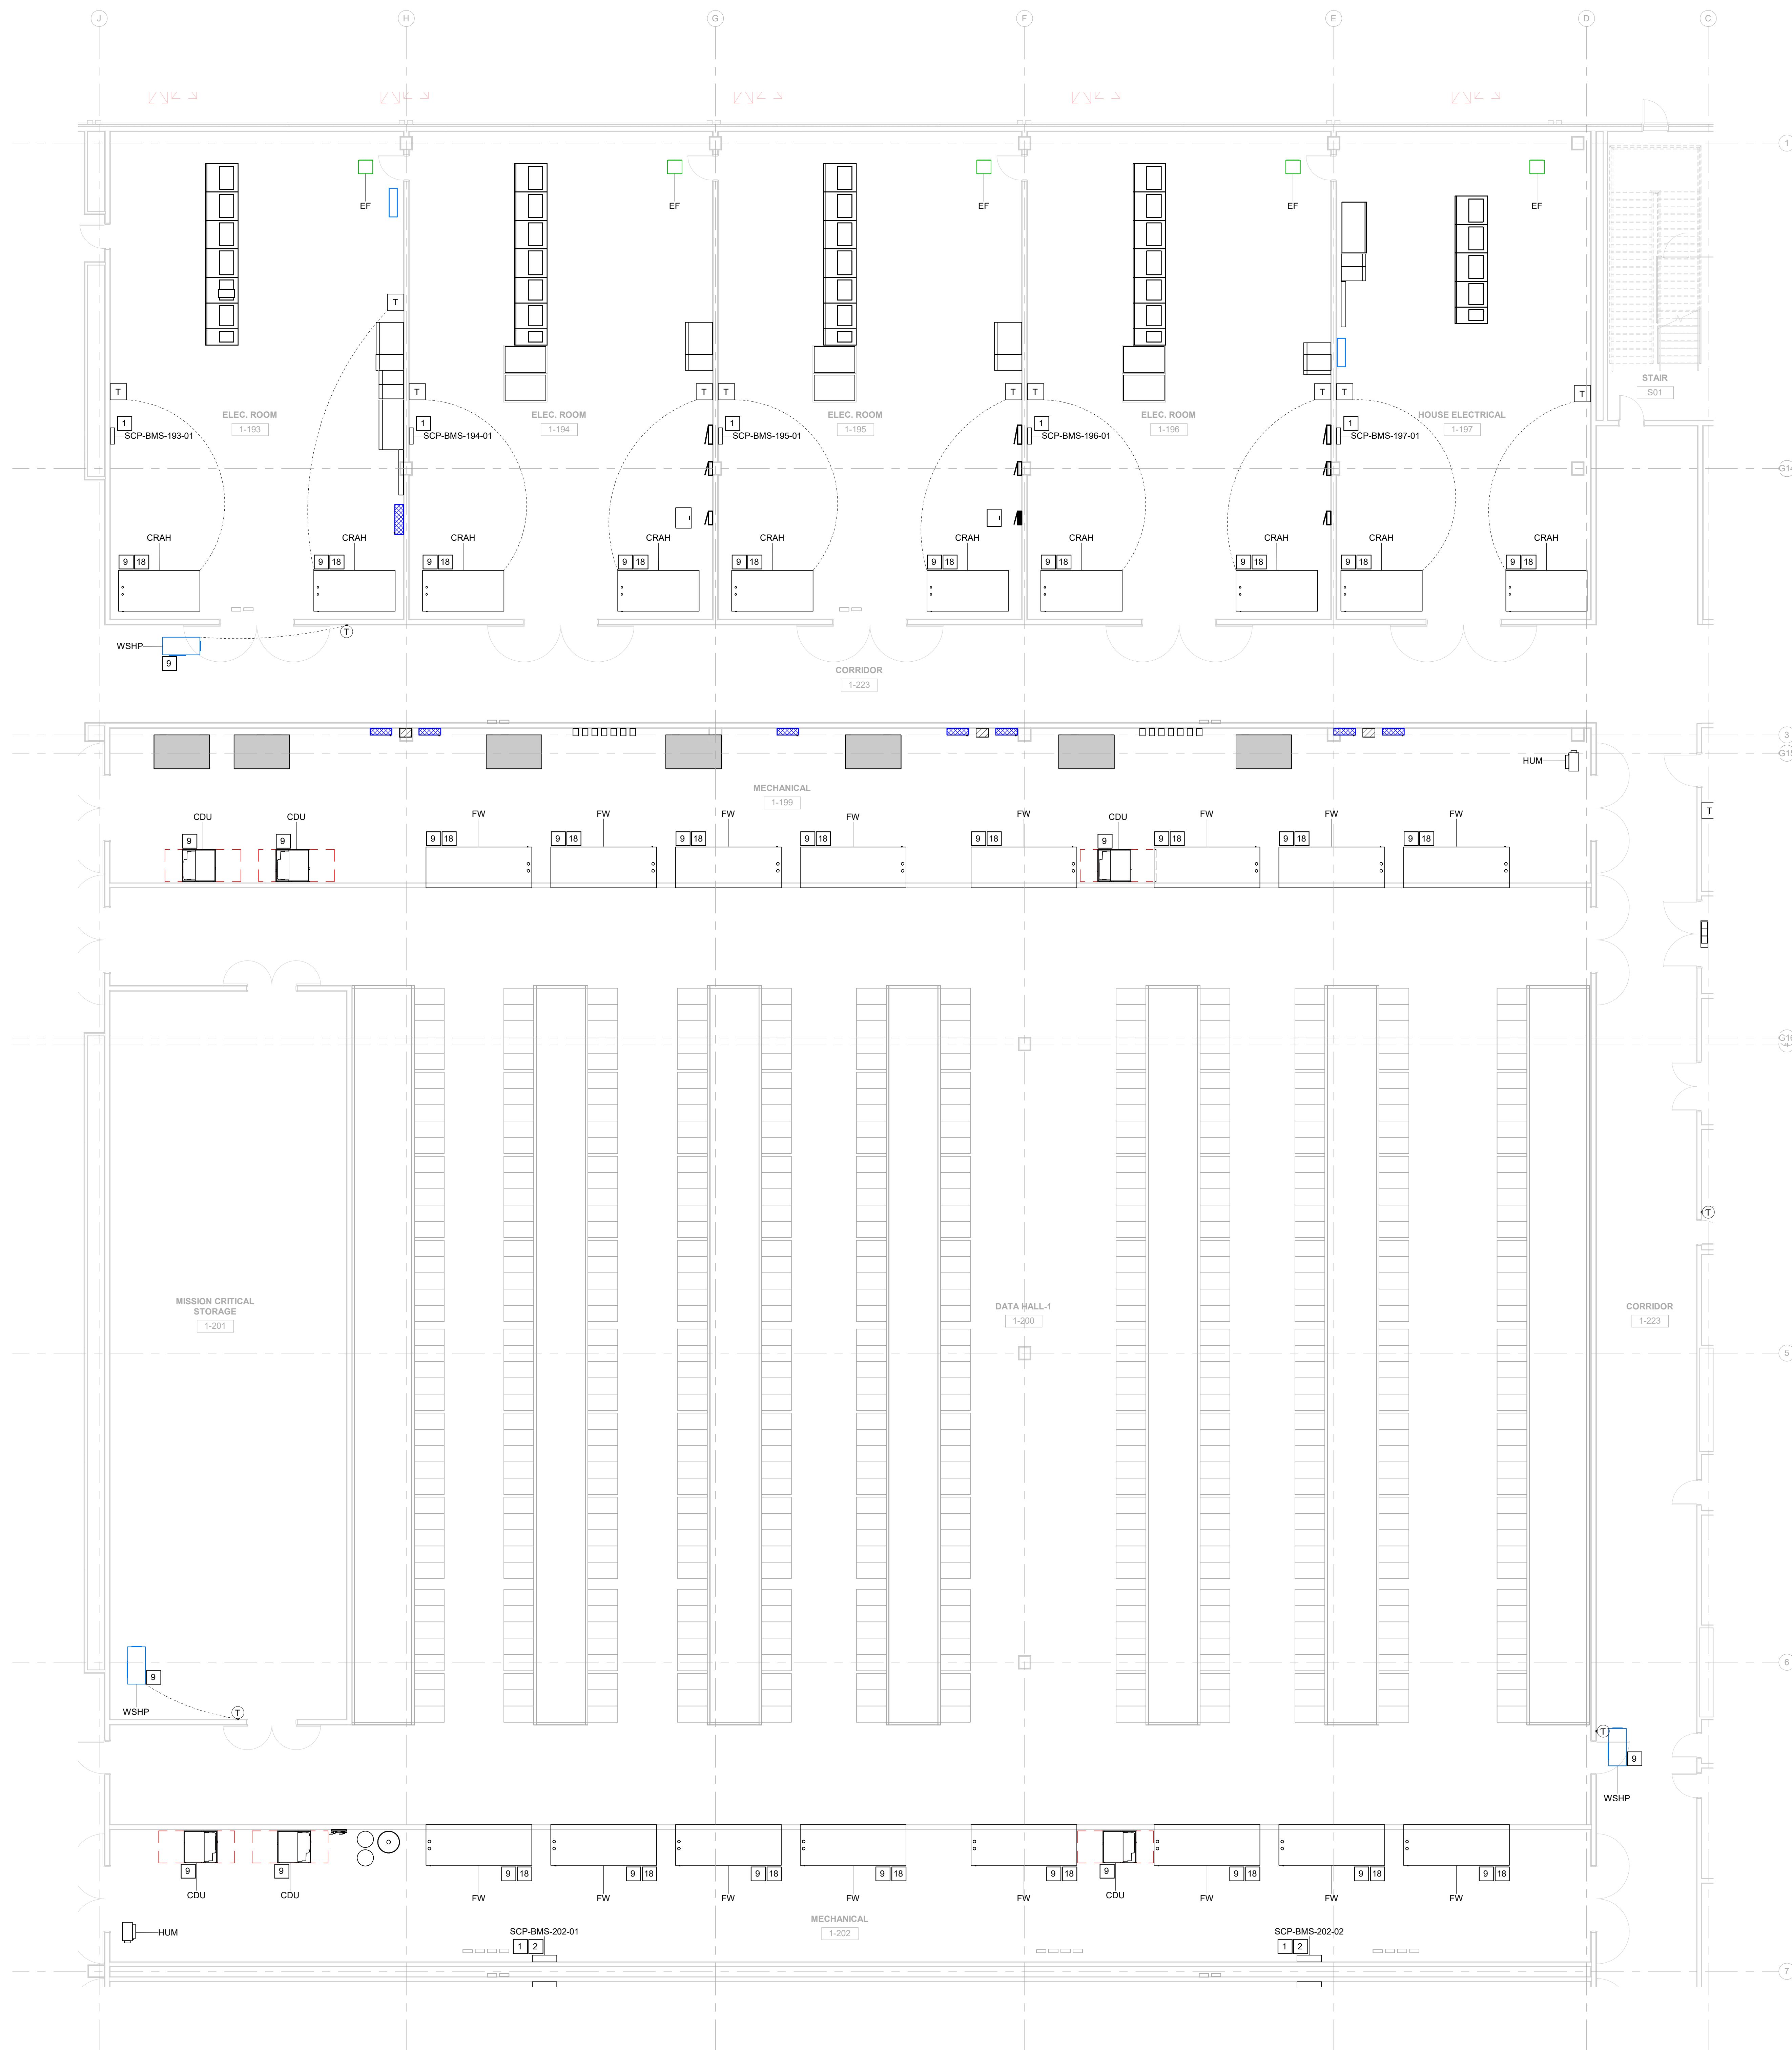

① LEVEL 1 - CONTROLS PLAN - SEGMENT C
1/8" = 1'-0"