


	DEMOLISH EXISTING ABOVE GRADE CHILLED WATER PIPE TO BELOW FINISHED GRADE. CAP EXISTING PIPES AND ABANDON IN PLACE. LABEL PIPES AS ABANDONED. REPLACE EXISTING 1/4" 2 PIECE SLOTTED CHECKER PLATE WITH A SOLID CHECKER PLATE. COORDINATE DEMOLITION WITH ELECTRICAL DUE TO EXISTING CONDUIT IN SAME LOCATION AND HEAT TRACING ON EXTERIOR CHILLED WATER PIPE.
2	DEMOLISH EXISTING PROCESS FLUID CHILLER.
3	DEMOLISH EXISTING LIEBERT ERU-1, ASSOCIATED DUCTWORK, CONDENSATE DRAINAGE PIPING, AND HYDRONIC ACCESSORIES.
4	EXISTING MAGNET COOLING SYSTEM TO BE DEMOLISHED BY OTHERS. DEMOLISH ALL CHILLED WATER PIPE, HYDRONIC ACCESSORIES, AND EMERGENCY DOMESTIC WATER COOLING LINES WITHIN EQUIPMENT ROOM.
5	DEMOLISH EXISTING 12" Ø EXHAUST DUCT BACK TO EXISTING 10'10" VERTICAL DUCT WITH WAVE GUIDE UP TO EXISTING EF-1 ON ROOF. CONFIRM ACCEPTABILITY OF EXISTING WAVE GUIDE WITH MRI EQUIPMENT MANUFACTURER OR REPLACE PER REQUIREMENTS OF MRI EQUIPMENT DRAWINGS.
6	DEMOLISH EXISTING 9" Ø QUENCH VENT FROM MAGNET TO CONNECTION TO EXISTING 12" Ø QUENCH VENT THROUGH ROOF TO EXISTING TERMINATION. CONFIRM WITH NEW MRI EQUIPMENT MANUFACTURER THAT EXISTING QUENCH VENT TERMINATION IS ACCEPTABLE.
7	DEMOLISH EXISTING RETURN TRANSFER DUCT BACK TO ELBOW. DEMOLISH EXISTING MOTORIZED DAMPER, WAVEGUIDE, AND DUCT MOUNTED TEMPERATURE/HUMIDITY SENSORS. REMOVE SENSORS FROM BAS.
8	DEMOLISH EXISTING SUPPLY DUCT BACK TO ST-3, INCLUDING HUMIDIFIER DISPERSION TUBE AND ANY DRAIN PANS.
9	DEMOLISH EXISTING SUPPLY DUCT BACK TO ST-9.
10	DEMOLISH EXISTING RETURN TRANSFER DUCT INCLUDING MOTORIZED DAMPER, DUCT MOUNTED TEMPERATURE SENSOR, AND WAVE GUIDE. REMOVE SENSOR FROM BAS.
11	DEMOLISH EXISTING HUMIDIFIER ABOVE CEILING, STEAM DISTRIBUTION PIPING, AND DRAIN LINES. REMOVE HUMIDIFIER FROM BAS.
12	DEMOLISH EXISTING CHILLED WATER PIPE DOWN TO BELOW FINISHED FLOOR. CAP EXISTING PIPES BELOW FLOOR SLAB AND ABANDON IN PLACE. LABEL PIPES AS ABANDONED. COORDINATE DEMOLITION WITH ELECTRICAL DUE TO EXISTING CONDUIT IN SAME LOCATION.
13	DEMOLISH EXISTING EXHAUST GRILLE AND DUCTWORK BACK TO EXISTING VERTICAL DUCT WITH WAVE GUIDE UP TO EXISTING EF ON ROOF. CONFIRM ACCEPTABILITY OF EXISTING WAVE GUIDE WITH MRI EQUIPMENT MANUFACTURER OR REPLACE PER REQUIREMENTS OF MRI EQUIPMENT DRAWINGS.
14	EXISTING DDC CONTROLS PANEL TO REMAIN.

$1/2'' = 1'-0''$

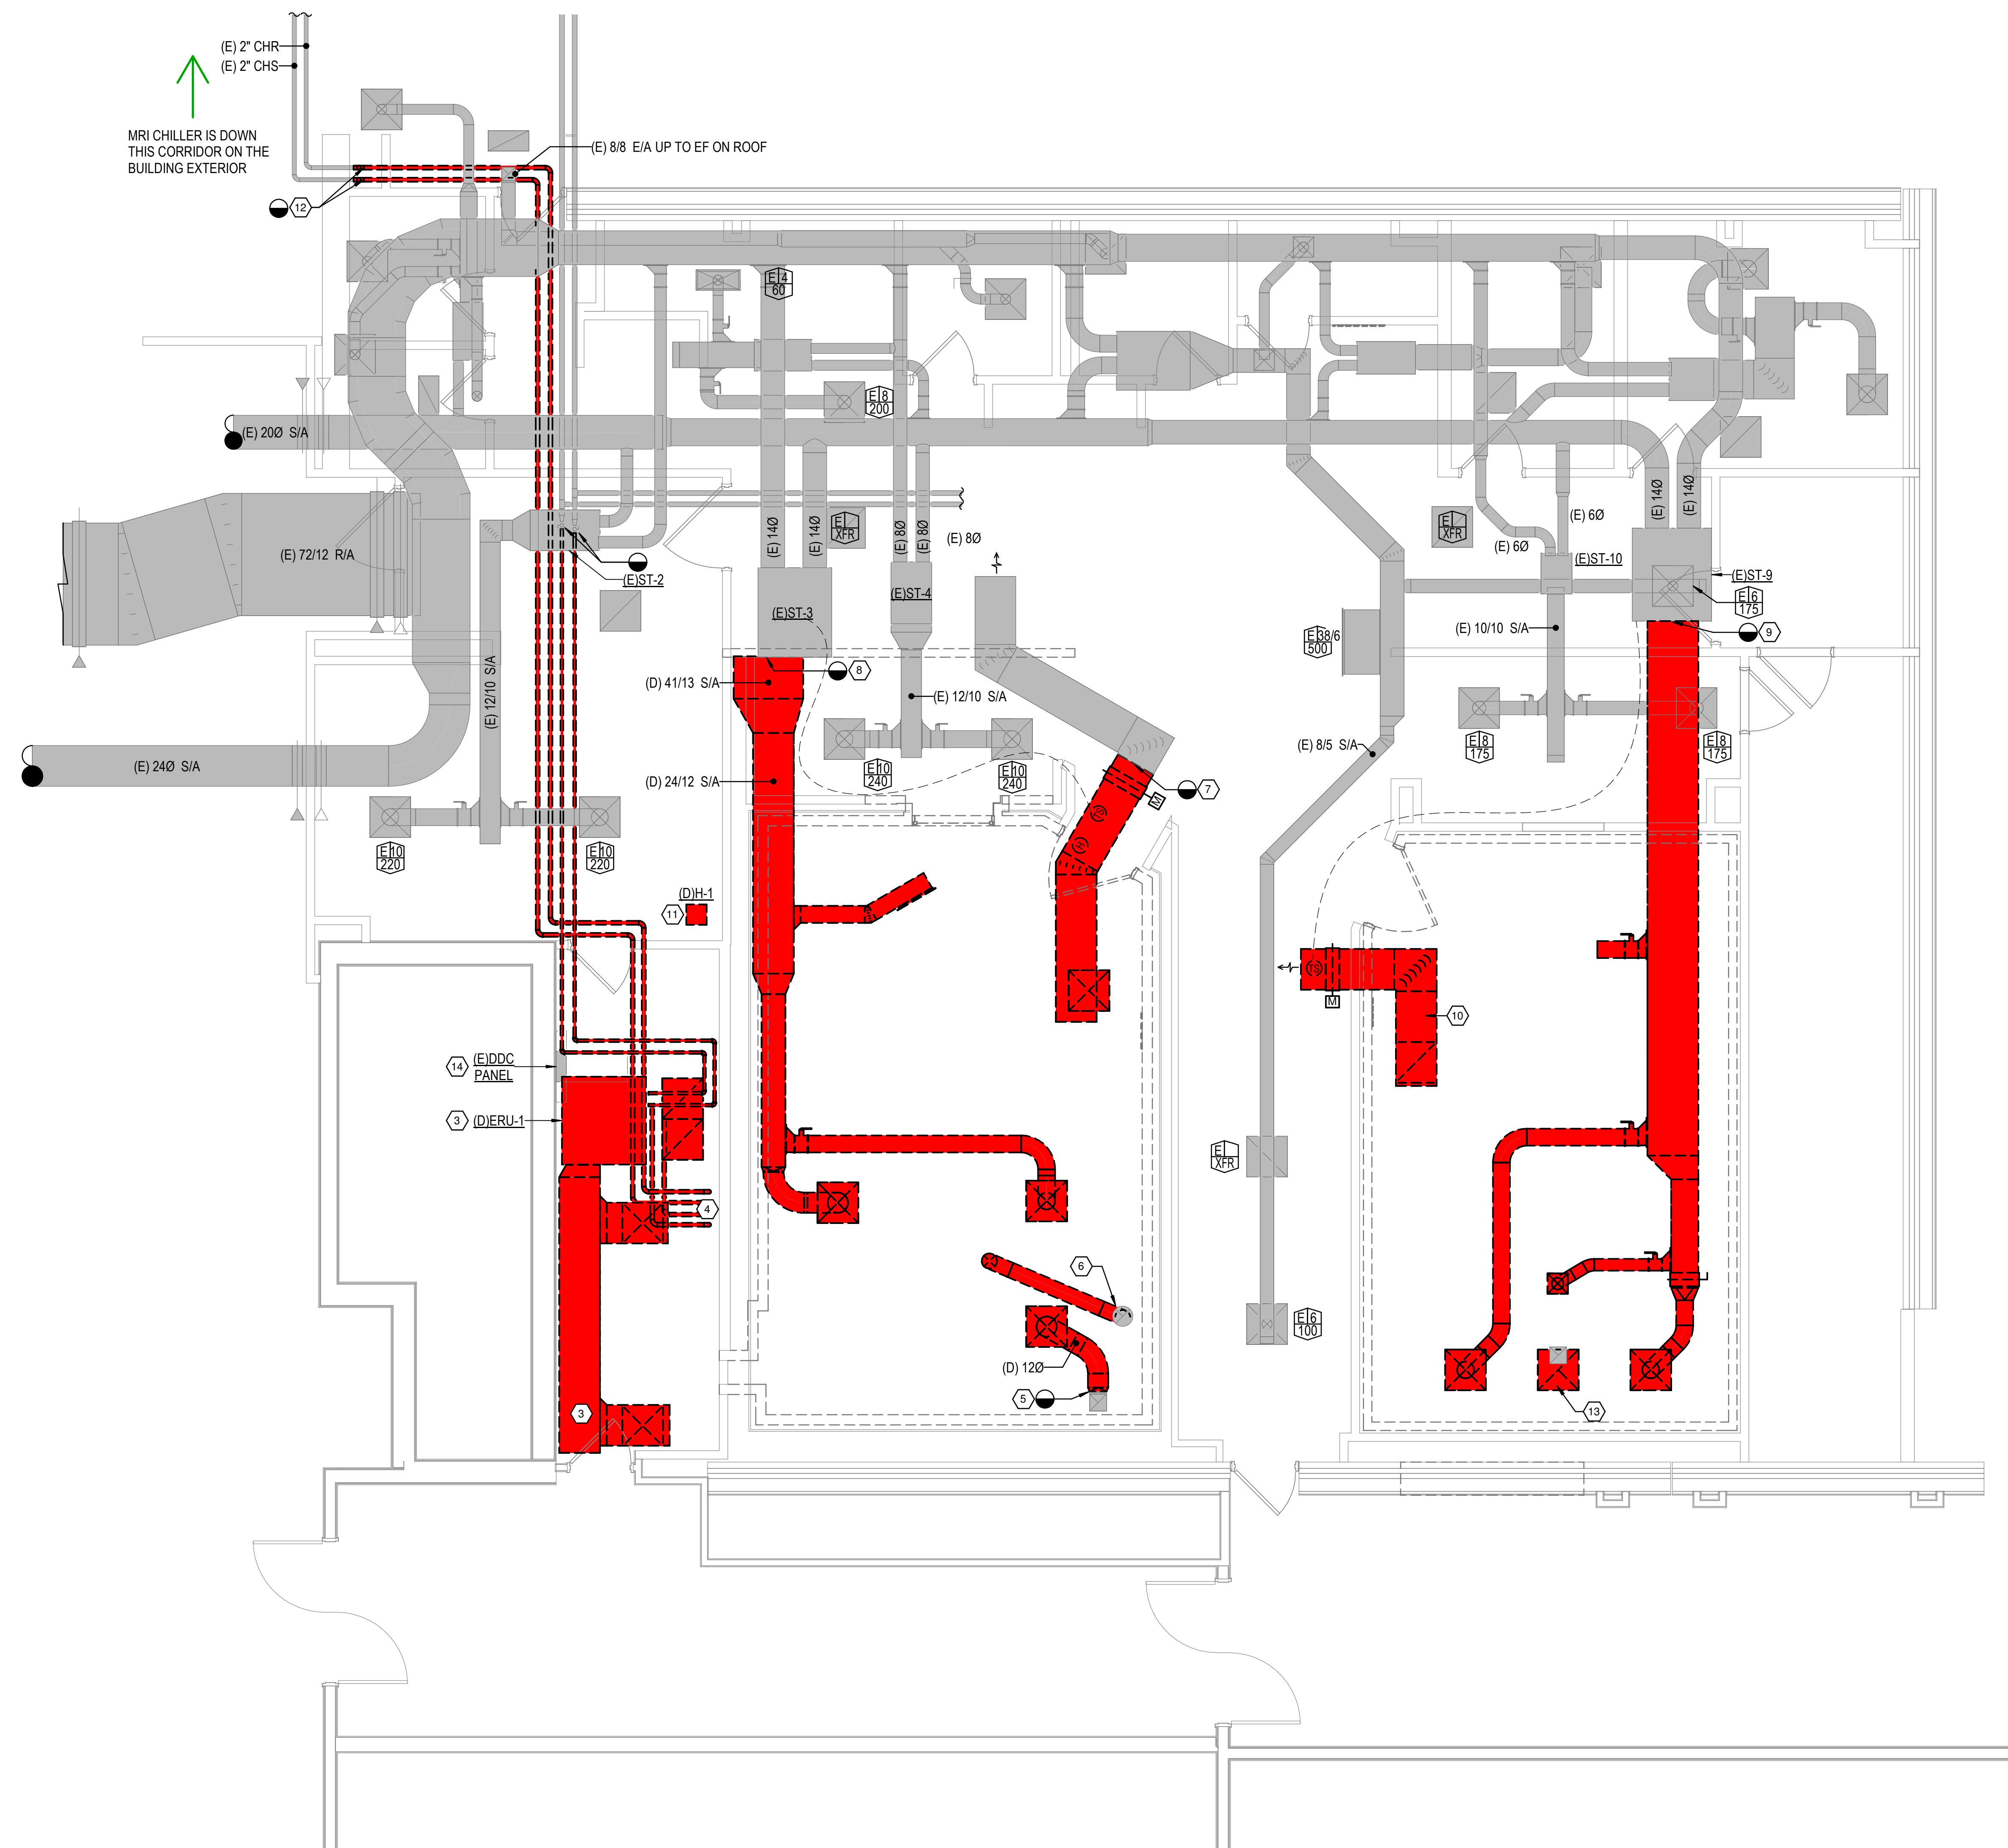

$1/4" = 1'-0"$

$1/2'' = 1'-0''$