ARCHITECTURAL ABBREVIATIONS

AB	ANCHOR BOLT
ACOUST.	ACOUSTICAL
AD	AUXILIARY DRAIN
ADJ.	ADJUSTABLE
ADMIN.	ADMINISTRATION
A.F.F.	ABOVE FINISH FLOOR
AGGRE.	AGGREGATE
ALUM.	ALUMINUM
BD	BOARD
B.F.F.	BELOW FINISH FLOOR
BLKG	BLOCKING
BM	BEAM
B.O.	BOTTOM OF
BPL	BASE PLATE
BS	BOTH SIDES
BTWN.	BETWEEN
B.U.R.	BUILT-UP ROOF
CAL.	CALIPER
CL	CENTERLINE
CFC	COMBINED FACILITIES COMPLEX
CSF	COMBINED SHARED FACILITIES
CG	CORNER GUARD
CJ	CONTROL JOINT
CLG	CEILING
CMU	CONCRETE MASONRY UNIT
COL.	COLUMN
CONC.	CONCRETE
CONC. BLK	CONCRETE BLOCK
CONST.	CONSTRUCTION
CONT.	CONTINUOUS
CT	CERAMIC TILE
DB	DECK BEARING
DIM.	DIMENSION
DR	DOOR
DTL	DETAIL
DWG	DRAWING
EA	EACH
E.B.	EXPANSION BOLT
EF	EXHAUST FAN
E.I.F.S.	EXTERIOR INSULATION AND FINISH SYSTEM
EJ	EXPANSION JOINT
ELEC.	ELECTRICAL
ELEV.	ELEVATION
EQ	EQUAL
EQUIP.	EQUIPMENT
EW	EACH WAY
EWC	ELECTRIC WATER COOLER
EXIST.	EXISTING
EXP	EXPANSION
EXT.	EXTERIOR
F	FEMALE
FD	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FEC	FIRE EXTINGUISHER CABINET
F.F.E.	FINISH FLOOR ELEVATION
FIN.	FINISH
FLR	FLOOR
FND	FOUNDATION
F.O.C.	FACE OF CONCRETE
FRP	FIBERGLASS REINFORCED PANEL
FTG	FOOTING
GA	GAGE
GALV	GALVANIZED
GR	GUARD RAIL
GP	GUARD POST
GYP	GYPSUM
GYP.BD.	GYPSUM BOARD
H	HIGH
HD	HANDICAP
HC	HOLLOW CORE
HDW	HARDWARE
HM	HOLLOW METAL
HORIZ.	HORIZONTAL
HP	HORSEPOWER
HT	HEIGHT
INFO.	INFORMATION
INSUL.	INSULATION
INT	INTERIOR
JAN	JANITOR.
JT	JOINT
JST	JOIST
KCJ	KEYED CONTROL JOINT
LAV.	LAVATORY
KG	KILOGRAM
LCB	LIQUID CHALK BOARD
LM	LINEAL METER
LG	LONG
MAS	MASONRY
MATL.	MATERIAL
MAX	MAXIMUM
MB	MINI-BLINDS
M.D.	METAL DECK
MECH.	MECHANICAL
MEMB.	MEMBRANE
MEZZ.	MEZZANINE
MFR	MANUFACTURER
MISC.	MISCELLANEOUS
MO	MASONRY OPENING
M.S.	METAL STUD
MTL.	METAL
N.I.C.	NOT IN CONTRACT
NS	NON-SHRINK
N.T.S.	NOT TO SCALE
OC	ON CENTER
OD	OUTSIDE DIAMETER
OFW	OUTSIDE FACE OF WALL
OPNG	OPENING
OPP.	OPPOSITE
P.LAM	PLASTIC LAMINATE
PL	PLATE
PLYWD.	PLYWOOD
PNL	PANEL
PROD	PRODUCE
KG/SQM	KILOGRAMS PER SQUARE METER
KG/SQCM	KILOGRAMS PER SQUARE CENTIMETER
QTY	QUANTITY
R	RISER
R	RADIUS
RD	ROOF DRAIN
REFRIG	REFRIGERATION
REINF	REINFORCING
REQD	REQUIRED
RM	ROOM
RPP	RACK POST PROTECTOR
SC	SOLID CORE
SCHED.	SCHEDULE
SECT.	SECTION
SHT.	SHEET
SIM.	SIMILAR
SPECS	SPECIFICATIONS
SMFE	SURFACE MOUNTED FEC
SRFE	SEMI-RECESSED FEC
S	SEWER
SS	SANITARY SEWER
S.S.	STAINLESS STEEL
SSC	STAINLESS STEEL CLOSURE
SST	STAINLESS STEEL THRESHOLD
STB	STAFF TRAINING BUILDING
STL	STEEL
STO.	STORAGE
STRUCT.	STRUCTURAL
SYM.	SYMBOL
T	TREAD
T & B	TOP AND BOTTOM
THK	THICK
THRESH.	THRESHOLD
TJ	TOOLED JOINT
TO	TOP OF
T.O.S.	TOP OF STEEL
T.O.P.	TOP OF PANEL
TS	TUBE STEEL
TYP	TYPICAL
T.O.M.	TOP OF MASONRY
U.N.O.	UNLESS NOTED OTHERWISE
VCT	VINYL COMPOSITION TILE
VERT.	VERTICAL
VEST.	VESTIBULE
V.I.F.	VERIFY IN FIELD
W	WIDE
W/	WITH
WC	WATER CLOSET
WD	WOOD
WDW	WINDOW
WG	WALL GUARD
W/O	WITHOUT
WP	WATERPROOFING
WT	WEIGHT
WWF	WELDED WIRE FABRIC

SYMBOLS LEGEND

ROOM LABEL



DOOR LABEL



WINDOW LABEL

REVISION IDENTIFICATION



ELEVATION SYMBOL



SECTION SYMBOL



DETAIL SYMBOL



KEY NOTE

PARTITION TAG

SECTION INDICATIONS

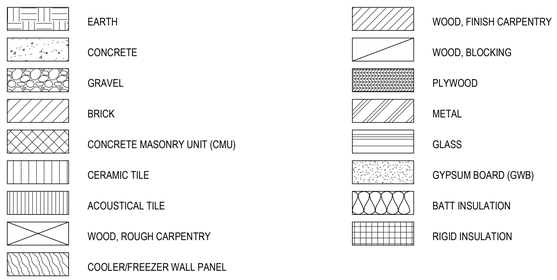

CROMWELL

1300 East 6th Street Little Rock, AR 72202
501.372.2900 cromwell.com

Project

PHILANDER SMITH UNIVERSITY

PHILANDER SMITH UNIVERSITY

M.L. HARRIS AUDITORIUM RENOVATION

Volume

VOLUME 1

Design Phase

CONSTRUCTION DOCUMENTS

Revisions

No.	Date	Description

Stamp

Notes

1. **CROMWELL ARCHITECTS ENGINEERS, INC. ALL RIGHTS RESERVED**
2. **THIS SHEET DESIGNED FOR COLOR PRINTING. CRITICAL INFORMATION MAY BE LOST WITH BLACK AND WHITE PRINTING.**

Project Number **2024-060**

Issue Date **09-10-2026**

Sheet Title **SYMBOLS & ABBREV. - VOLUME 1**

Sheet Number

G-003